

# Modern Digital Multimeter | 39C+



Economy

39C+ modern digital multimeter is designed for the electrical technicians. It features overvoltage and overcurrent alarm and high voltage protection, triggered during faulty operation. 39C+ is suitable for HVACR maintenance with its temperature measurement feature. Designed according to CAT II 1000V/CAT III 600V safety standards

## Features :


- 4000 Display count
- Temperature measurement
- Non contact voltage measurement



## Specifications :

Manual Range	√	
Display Count	4000	
Measurements	Accuracy	
DC Voltage	400mV/4V/40V/400V/1000V	± (0.5%+5)
AC Voltage	4V/40V/400V/750V	± (0.8%+3)
DC Current	400uA/400mA/10A	± (0.8%+3)
AC Current	4mA/400mA/10A	± (1%+2)
Resistance	400Ω/4000Ω/40kΩ/400kΩ/4MΩ/40MΩ	± (0.8%+2)
Capacitance	4nF/40nF/400nF/4uF/40uF/400uF/4mF/10mF	± (4%+5)
Frequency	10Hz~1MHz	± (1%+4)
Temperature °C	-40°C~1000°C	± (1%+4)
Temperature °F	-40°F~1832°F	± (1.5%+5)
hFE	√	
NCV	√	
Diode Test	√	
Continuity Buzzer	√	
Frequency Response	√	
Display		
Low Battery Indication	√	
Data Hold	√	
Auto Power Off	√	
Backlight	√	
Other Features		
Category Safety Ratings	CAT II 1000V/CAT III 600V	
General Characteristics		
Weight	330g	
Size	175mm x 83mm x 53mm	
Power	1.5V Battery (R03) x2	
Display	56.5mm x 36mm	
Standard Accessories	Test Leads, Temperature Probe	

Complies to:  
IEC61010-1  
IEC61010-2-030  
IEC61010-2-033  
IEC61326-1  
IEC61326-2

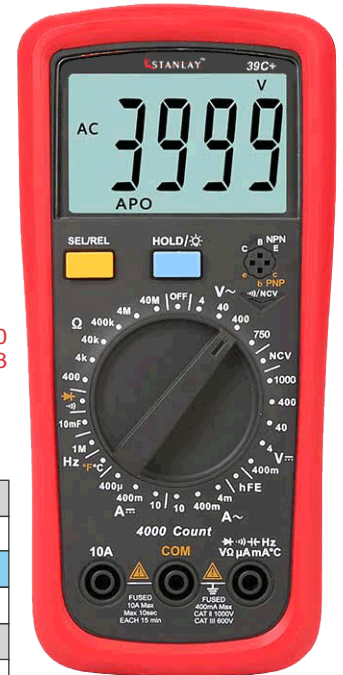

Asian Contec Ltd.

Asian Center, B-28, Okhla Industrial Area, Phase-1, New Delhi -110020, India.

Contact Nos. : Tel : +91-11-41860000 (100 Lines), Direct Sales Helpline : +91-11-41406926

Web : www.stanlay.in www.stanlay.com email: sales@stanlay.com

Regional Offices : • Faridabad • Mumbai • Bengaluru • Hyderabad • Bhubaneshwar • Guwahati

Quality  
Management  
System

ISO 9001: 2015

# 1-QSC202101102



Ref:ST/39C+/2021