



REBAR DETECTION SYSTEM

- Location and orientation of reinforcing bars
- Measuring concrete cover depth
- Determination of bar diameter
- Compact, user-friendly indicating device with backlight
- ProVista PC software for fast data transfer and editing
- Can be operated in metric and imperial units

PROFOMETER 5⁺ utilizes the non-destructive pulse-induction method




Standards: SN 505 262 • DIN 1045 • DGZfP B2 • BS 1881: Part 204

Model S • Basic Instrument

Various location aids are available:


- Current value:** Distance from surface of reinforcement
- Flow bar:** Movement of flow bar indicates approach to metal object
- Beep tone:** Sounds immediately after crossing the bar axis. Selectable in two frequencies.
- Variotone:** The closer the probe to the bar, the higher the tone
- Signal value:** Measure of distance from probe to metal object

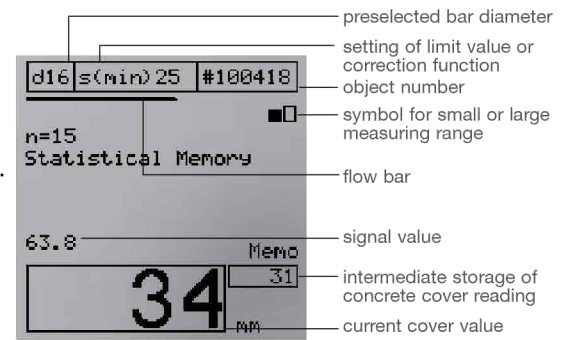

«Measuring with statistics» function




The statistical evaluation of the stored memo values appears when the END button is pressed.

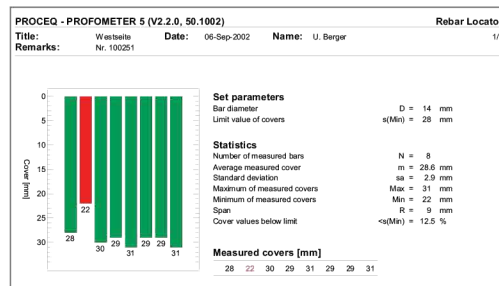

Data transfer to PC and evaluation with ProVista Software


Determine the bar diameter of closely spaced parallel bars

The instrument compensates the influence of the neighboring bars.

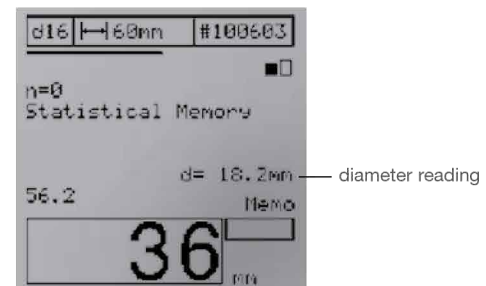

Measure the cover depth in congested bar arrangements

Measure the bar spacing and select the measuring mode. The instrument compensates for the influence of the adjacent bars.




Detect bars with insufficient concrete cover

Suggested applications:

- Check after removing formwork
- Quality assurance
- Evaluation basis for repair

The universal probe can be moved rapidly with the preselected limit value. If the cover is too low, an acoustic warning signal is given.





Modell SCANLOG • Identical to Model S – with these additional Features:

- "CyberScan" function to visualize reinforcing bars on the display
- "Measuring with grid" function for grey-scale display of concrete cover
- ScanCar probe cart with integrated path measuring device for scanning





Make reinforcement visible with "Cyber Scan"!

Three scales are available: 0.5 x 0.5m, 1.0 x 1.0m, 2.0 x 2.0m

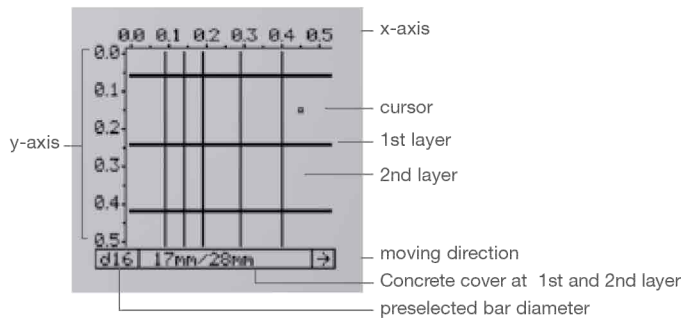


Data transfer to the PC and processing with ProVista Software

«Measuring with grid» function

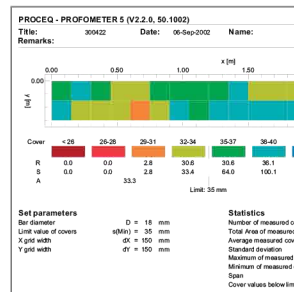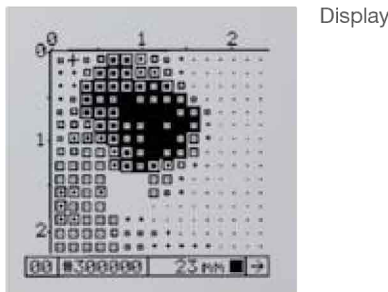


Data transfer to the PC and processing with ProVista Software

Measuring ranges and accuracy of the cover reading for individual bars...

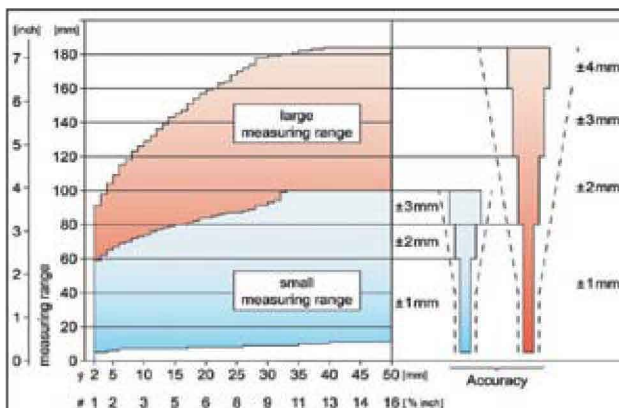

- Ø bar diameter in mm
- # bar diameter in «Bar size»
- accuracy required by BS 1881: Part 204: ± 2 mm or ± 5%

...and unsurpassed resolution

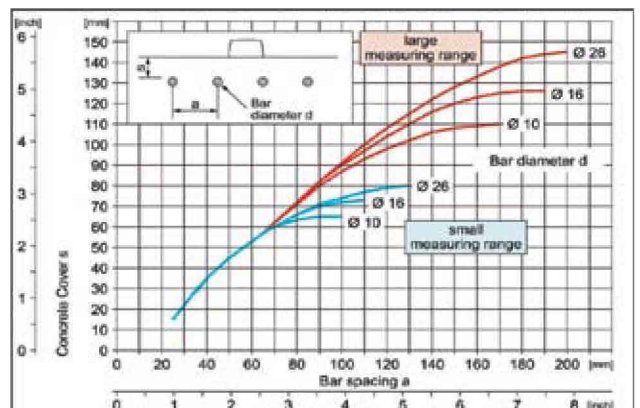

The diagram shows the minimum bar spacing (a) at which the bars can still be individually detected as a function of the concrete cover (s).

Example : Bar diameter $d = 16 \text{ mm}$
Concrete cover $s = 55 \text{ mm}$
Minimum bar spacing $a = 70 \text{ mm}$

Technical Information

Indicating device Model S

MEMORY: non-volatile memory for 40'000 measured values and 60 objects respectively

DISPLAY: LCD with backlight option

INTERFACE: RS232 or with Adapter for USB Port on PC

SOFTWARE: ProVista for downloading data and evaluation on PC

BATTERIES: 6 x 1.5V for 45h operation; 30h with backlight on

TEMPERATURE RANGE: -10° to +60° C

Universal probe

Probe for locating rebars and measuring cover depth in two depth ranges as well as determining rebar diameters.

Indicating device Model SCANLOG

The unit is identical to Model S, with additional features for the Cyberscan and the measuring with grid function.

Memory capacity: 120'000 values in function measurement with grid and a total of 60 objects.

Model S can be upgraded to Model SCANLOG. Contact Proceq for details.

Ordering Information

UNIT MODEL S

390 00 050 Rebar Detection System PROFOMETER 5+ Model S
Includes Indicating device, universal probe, probe cable 1.5m, transfer cable 1.5 m, adapter RS232/USB, ProVista Software on memory stick, carrying strap, headset, protective sleeve for indicating device, operating instructions, carrying case, total weight 4.2 kg

UNIT MODEL SCANLOG

390 00 054 Rebar Detection System PROFOMETER 5+ Model SCANLOG identical to Model S, with the additional features plus probe cart ScanCar with path measuring cable 1.55 m, total weight 4.5 kg

ACCESSORIES FOR BOTH MODELS

390 00 270 Test block
390 00 363 Telescopic rod for universal probe or ScanCar
390 00 280 Marking pen for universal probe

REPLACEMENT PARTS

390 00 068 Universal probe
390 00 084 Protective film for universal probe
330 00 470 Protection sleeve for indicating device
390 00 163 Probe cable 1.5 m
390 00 168 Path measuring device cable 1.55 m
330 00 456 Transfer cable 9/9 poles
390 00 542 Adapter RS 232 / USB
390 00 078 Carrying case
820 39 001 Operating instructions

Subject to change without notice.

All information contained in this documentation is presented in good faith and believed to be correct. Proceq SA makes no warranties and excludes all liability as to the completeness and/or accuracy of the information. For the use and application of any product manufactured and/or sold by Proceq SA explicit reference is made to the particular applicable operating instructions.

Sales and Service Contacts:

Head Office

Proceq SA
Ringstrasse 2
CH-8603 Schwerzenbach
Switzerland
Phone: +41 (0)43 355 38 00
Fax: +41 (0)43 355 38 12
info@proceq.com
www.proceq.com



Regd. Office:
Asian Contec Ltd.
Asian Centre, B-28, Okhla Industrial Area,
Phase-1, New Delhi - 110020, India.
Contact Nos.: Tel: +91-11-41860000 (100 Lines),
Direct Sales Helpline: +91-11-41406926,
Fax: +91-11-41860066
Web: www.stanley.in email: sales@stanley.com
Works: Asian Contec Ltd. 44A Export Promotion Industrial Park-1,
Jharmajari, Baddi, Himachal Pradesh, India
Regional Offices: • Hyderabad • Ahmadabad



proceq



Main components



Test block



Telescopic rod for universal probe or ScanCar



Marking pen for universal probe