



STANONE[®] Series

SVTS850-8.5mm-5 Meter Probe

**360 DEGREE ROTATING PROBE BORESCOPE WITH
DUAL FRONT & SIDE INSPECTION CAMERA**



5-Inch
LCD Screen



IP67
Waterproof



3500mAh
Lithium-Ion Battery

**WITH *BIGGER SCREEN*
COMES CLEARER INSPECTION DETAIL**

SVTS850



360° CONTROLLED ROTATION ROTATING PROBE BORESCOPE + DUAL FRONT & SIDE CAMERA



360° Rotation



Probe Rotation Control

Press for anti-clock-
wise rotation.

Press for clock-wise
rotation.



Press for switching
between Front View
or Side View Camera

INDUSTRIAL ENDOSCOPE CAMERA

2-Way Rotation with left – right (clockwise or anti clockwise) rotating control & with front and side camera viewing.

SVTS850



8.5MM-5M-DL



MINI TABLET-STYLE, PROFESSIONAL, 5-INCH, INSPECTION CAMERA



Explore tight spaces confidently with the **SVTS850 Dual-Lens Inspection Camera** featuring a **5" screen**. This comprehensive system comprises an endoscope camera equipped with **front and side camera lenses**, both with integrated **LEDs**, alongside a convenient **5" monitor with a handheld grip**. Designed to view even the areas with left – right (clockwise or anti clockwise) **motorized 360 degree rotating control** & with front and side camera viewing, it's ideal for a myriad of tasks including plumbing, equipment inspection and automotive inspections.

The probe is a slim 8.5mm diameter, allowing use in small pipes and confined spaces, further enhanced by its **IP67 waterproof rating**. The 5" display, fortified with durable tempered glass, affords clear visualization of the probe's perspective. Mounted on a handgrip, the monitor enables real-time viewing of the inspection process. With a **32GB micro SD card** included, you can effortlessly record for comprehensive documentation.

Conveniently equipped with an **LED flashlight** on the handgrip, the SVTS850 illuminates dark environments, facilitating seamless operation. The **built-in 3500mAh battery** ensures extended usage, providing up to 4.5 hours of continuous runtime, guaranteeing uninterrupted inspection sessions.

SVTS850

Monitor Features

5.0" IPS Screen With 1280x720 Resolution

3 Times Clearer than other 5.0"



STAN ONE®

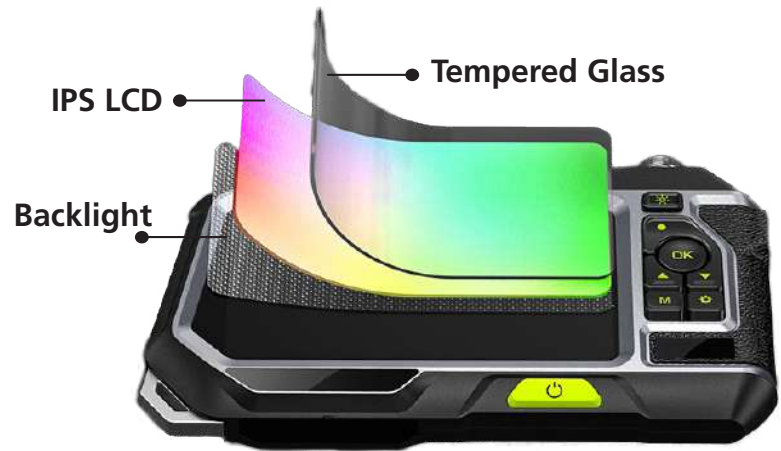


PHOTO AND VIDEO

- 5.0-inch Colour IPS Display
- 2 million High Definition Pixel
- Tempered Glass Screen Is Scratch Resistant



- 360° Image Rotation
- Mirroring Rotation



Memory Card 32GB
100000+ Images
50+ Video



IP67 Waterproof



Replaceable
Different Cable




LED FlashLight
Illuminates the
Darkest Areas



- 3500mAh Battery
- 5 Hours Working Time



Drop Resistant

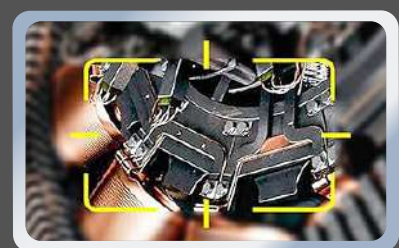


Auto Focus

SVTS850



DUAL-LENS FLEXIBLE INSPECTION CAMERA PROBES



Flexible with Copper Wire

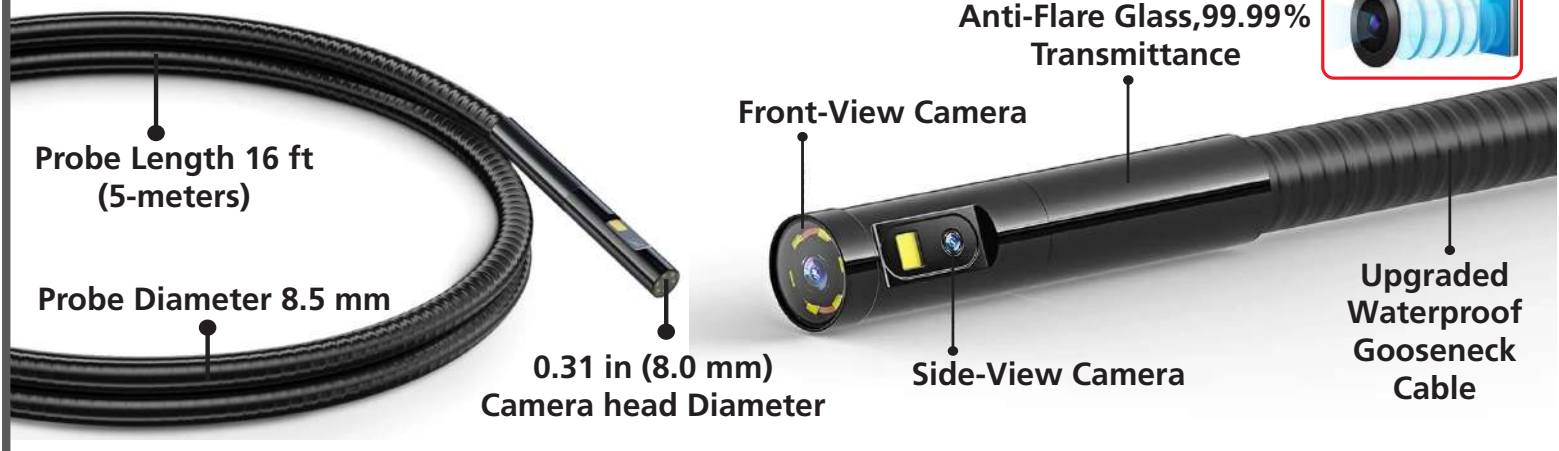

1080P Dual-Camera Probe
Get Different Field Of View

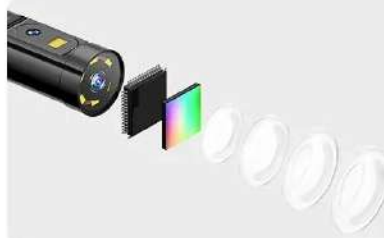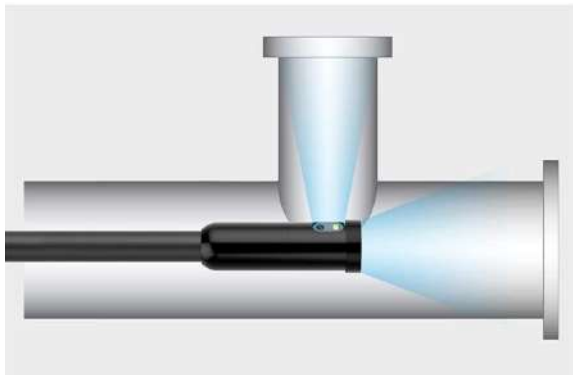

Front-View Camera

- Focal Distance 30-80mm
- 70° View Angle
- 6 rings LEDs
- 2.0 megapixel HD



Side-View Camera

- Focal Distance 20-50mm
- 70° View Angle
- 2.0 megapixel HD
- LED light illumination

6 Adjustable LED Lights



IP67 WATERPROOF
Probe & Camera



SVTS850

Specification



Monitor

| | |
|----------------------------|--|
| Screen | 5-inch IPS HD Display |
| Screen Resolution | 1280x720 Pixels |
| Image Capturing Resolution | 1920x1080 Pixels |
| Video Recording Resolution | 1280x720 Pixels |
| Storage | 32GB Micro SD Card |
| Ports | Type-C charging port / TF Memory Card Slot |
| Power Source | 3500mAh lithium Battery |
| Battery Life | 5-6 Hours |
| Operating temperature | 0° to 45°C |
| Language | English |

Probe & Camera


| | |
|-----------------------------------|---|
| Lens Type | Dual Lens: Front-View + Side-View + 360° Viewing (Rotation) |
| Camera Head Diameter | 8 mm |
| Probe Length | 5 Meters /16 ft |
| Probe Diameter | 8.5 mm |
| Megapixel Camera | 2.0 Megapixel |
| Viewing Angle (FOV) | 70° |
| Probe Stiffness | Semi -Rigid |
| Straight-Viewing Camera | 30 mm to 80 mm |
| Side-Viewing Camera | 20 mm to 50 mm |
| LED Light | 6 Adjustable High-Intensity LEDs |
| LED Adjustable Step | Off + 3 Step |
| Splash, Water, and Dust Resistant | Rated IP67 (maximum depth of 1 meter up to 30 minutes) Under IEC Standard 60529 |



SVTS850



Multiple Application

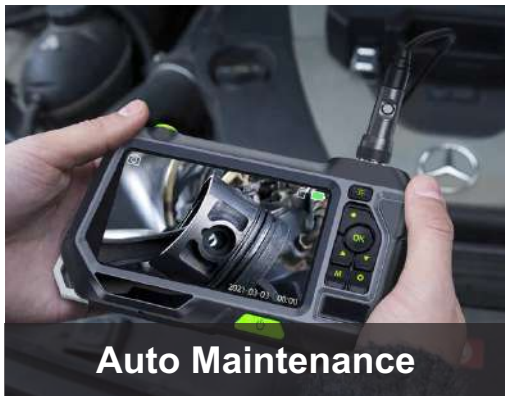

Auto Maintenance



Building Inspection



Air-Condition Inspection



Appliance Inspection



Mechanical Inspection





**Professional
Grade
Products**

**Best In Class
Warranty
Programmes**

**Product &
Service
Training**

Regd. Office:
Asian Contec Ltd.
Asian Centre, B-28, Okhla Industrial Area, Phase-1,
New Delhi -110020, India.

Contact Nos.:
Tel : +91-11-41860000 (100 Lines),
Direct Sales Helpline : +91-11-41406926
Web : www.stanlay.in www.stanlay.com
email: sales@stanlay.com

Works :
Asian Contec Ltd. 13/7,
Mathura road, Faridabad, Haryana, India

Regional Offices :
• Mumbai • Bengaluru • Hyderabad • Vadodara
• Lucknow • Patna • Bhubaneshwar • Guwahati

Sales Channel Locations: • Chennai

Ref: STVS850/24/1

www.stanlay.in

**Quality
Management
System**

ISO 9001: 2015

1-QSC202101102

