

P100



CASAGRANDE AND STANDPIPE

PIEZOMETER

PIEZOMETERS





CASAGRANDE AND STANDPIPE PIEZOMETERS

Casagrande piezometers are used to measure the pore water pressure in medium-low permeable soil. They are composed by a filter unit connected to the surface with single or twin tube.

Standpipe piezometers are used to monitor the ground water table level in high permeability soil. The standpipe filter unit consists of a Casagrande filter not sealed in the borehole with bentonite, or a slotted tube covered by geotechnical fabric for filtered water entry.

APPLICATIONS

- Control of ground water level
- Hydrological and water supply investigations
- Construction and stability control of rail and road embankments, earth dams and foundations
- Investigation of stability in natural and cut slopes
- Permeability tests for drainage and de-watering activities


FEATURES

- Filters available in different model for both single or twin tube
- Simple automation with resistive or vibrating wire pressure transducers
- Available conic-tip transducer that turn Casagrande piezometer in close circuit piezometer
- Wide range of accessories available for installation and reading

CASAGRANDE PIEZOMETERS

Casagrande piezometers are used to detect, measure and monitor water pressure in medium-low permeable soil or rock specifically **at the installed depth of the filter tip**. Typically a bentonite seal is installed immediately above and sometimes below the filter. The filter is normally connected to the surface by a single or a pair of tubes. Pair of tubes provides a water inlet and outlet for internal flushing to clean the filter. The pore pressure can be read as water column by portable water level meter or automatically with a pressure transducer inserted in the standpipe.


A special conical removable pressure transducer, having tip fitted with an 'O' ring, is designed to mate to the conical port of P101 Casagrande filter unit to form a closed circuit piezometer.

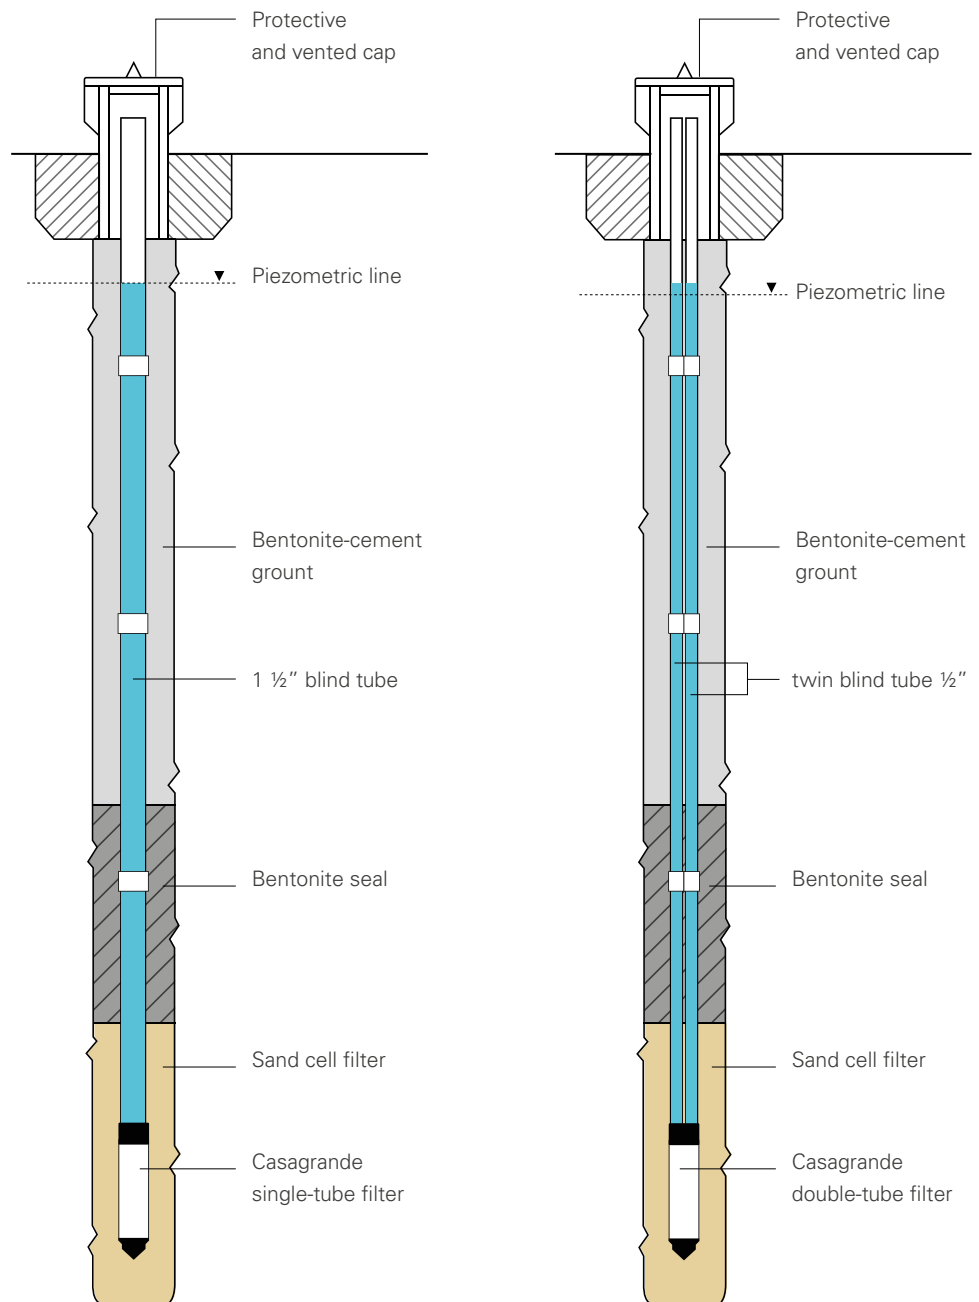



STANDPIPE PIEZOMETERS

The standpipe piezometers are used to detect, measure and monitor ground water level in permeable soils. The filter could be composed by a slotted PVC tube with external geotextile sock filter or a simple Casagrande filter unit. The filter unit and tube column(s) are installed to permit water from the full length of the borehole to enter the filter. Typically this is achieved by back filling the standpipe borehole with coarse grained sand or gravel. The water level can be read by portable acoustic water level meter or automatically with a pressure transducer inserted in the standpipe; relative pressure transducers do not need any barometric compensation, while vibrating wire absolute pressure transducers need compensation to balance fluctuations of atmospheric pressure.

Standpipe piezometer with Casagrande filter having double tube (1 ½" + ½") could read ground water level in the same point with two methods: manually with a water level meter in the smaller tube and automatic with pressure transducer in the larger tube.

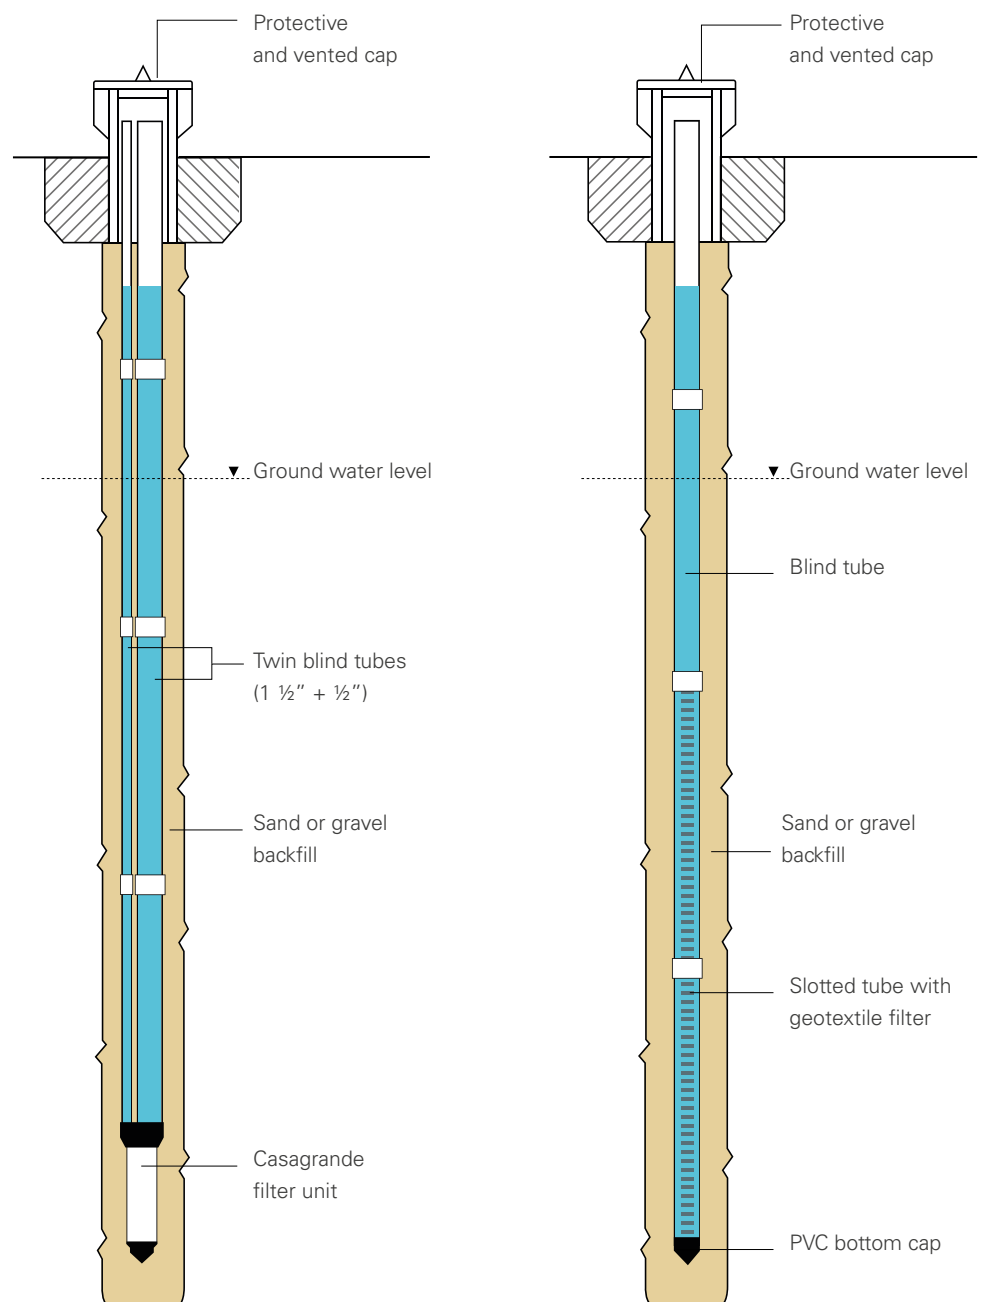

CASAGRANDE FILTER UNITS

| PRODUCT CODE | MODEL | FILTER DIAM. / LENGTH | MATERIAL / POROSITY | OD | TUBE CONNECTION |
|--------------|--|-----------------------|---------------------|---------|---------------------|
| 0P101002000 | P101  | 61.5 / 200 mm | polyethylene / 40 µ | 61.5 mm | 1 x 1" ½ |
| 0P112A02000 | P112A  | 61.5 / 200 mm | polyethylene / 40 µ | 80.0 mm | 1 x 1" ½ / 1 x 1" ½ |

PVC BLIND TUBES (AVAILABLE ONLY UNDER REQUEST)

| PRODUCT CODE | NOMINAL OD / PRESS. CLASS | OD / ID | COUPLING OD / THREADING | MATERIAL | LENGHT |
|--------------|---------------------------|----------------|-------------------------|----------|--------|
| 0TCH0005000 | ½" / PN 12.5 | 21.1 / 15.9 mm | 26 mm / Gas | PVC | 3 m |
| 0TCH0015000 | 1" ½ / PN 12.5 | 48.0 / 40.0 mm | 55 mm / Gas | PVC | 3 m |
| 0TCH0020000 | 2" / PN 12.5 | 60.0 / 51.6 mm | 81 mm / Gas | PVC | 3 m |
| 0TCH0030000 | 3" / PN 12.5 | 89.0 / 79.0 mm | 95 mm / Gas | PVC | 3 m |

PVC SLOTTED TUBES (AVAILABLE ONLY UNDER REQUEST)

| PRODUCT CODE | NOMINAL OD / PRESS. CLASS | OD / ID | COUPLING OD / THREADING | MATERIAL / LENGHT | SLOT / DISTANCE |
|--------------|---------------------------|-------------------|-------------------------|-------------------|-----------------|
| 0TFH0010000 | 1" / PN 12.5 | 33.3 mm / 26.7 mm | 40 mm / Gas | PVC / 3 m | 0.5 mm / 4.5 mm |
| 0TFH0015000 | 1" ½ / PN 12.5 | 48.0 mm / 40.0 mm | 55 mm / Gas | PVC / 3 m | 0.5 mm / 4.5 mm |
| 0TFH0020000 | 2" / PN 12.5 | 60.0 mm / 51.6 mm | 81 mm / Gas | PVC / 3 m | 0.5 mm / 4.5 mm |
| 0TFH0030000 | 3" / PN 12.5 | 89.0 mm / 79.0 mm | 95 mm / Gas | PVC / 3 m | 0.5 mm / 4.5 mm |

ACCESSORIES AND SPARE PARTS

LOCKABLE TOP CAP OP100CH1000

Equipped with an identification plate and a topographic pin, the lockable cap ensures protection at the top end of Casagrande and standpipe piezometers.

WATER LEVEL METER

It is utilized to take manual measurement in Casagrande and standpipe piezometers. Available also with temperature probe.

RELATIVE PRESS. TRANS.

Relative pressure transducer for automatic monitoring of water level in Casagrande and standpipe piezometers.

TRANSDUCER SUPPORT HEAD OP100CH2000

It is equipped with an identification plate, a topographic pin, a lockable cap and a hanging system for pressure transducers.

PVC BOTTOM CAP⁽¹⁾ OTPVC000000

Bottom cap for standpipe piezometer with slotted tube filter. Available for ½", 1", 1 ½", 2" and 3" tubes.

GEOTEXTILE FILTER⁽¹⁾ 1000TNT000

Special sock made by geotextile placed around slotted PVC tubes to prevent incoming of sand.

(1) Products available only under request



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l. The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages. For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument. The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.



CDL DATALOGGERS

READOUT UNITS
AND DATALOGGERS



CDL DATALOGGERS

CDL is a family line of durable, water resistant easy-to-use portable readout which includes Galileo and New Leonardo dataloggers.

They are equipped with an high performance microprocessor, Ni-MH batteries and color graphic display.

New Leonardo datalogger is compatible with all types of Sisgeo's sensors. Galileo is designed for use with vibrating wire instruments.

Multiple-readings through multiplexer box and switch measuring boxes are supported.

FEATURES

- Compatible with all sensors
- Large coloured display
- Accurate and precise measurements
- Splash-proof hand-held case
- Bluetooth module for smartphone connection

BENEFITS

- Lightweight and portable
- Reads both electrical and engineering units
- Auto shutdown
- Live up-date for firmware and software
- Sunlight reliable display



Meet the essential requirements of the EMC Directive 2004/108/EC

TECHNICAL SPECIFICATIONS

| | DATALOGGER NEW LEONARDO (PRODUCT CODE 0CDL400N0000) | DATALOGGER GALILEO (PRODUCT CODE 0CDL100VW00) |
|-------------------------------|---|--|
| Channels | 2 | 2 |
| A/D converter | 2x24 bit with autocalibration (19 true bit) | 2x24 bit with autocalibration (19 true bit) |
| Digital display | TFT graphic backlight LCD 320 x 240 pixel, 5.7", sunlight reliable | TFT graphic backlight LCD 320 x 240 pixel, 5.7", sunlight reliable |
| Type of measure | mA, mV, V, mV/V, Hz, μ sec, digit, μ ε, °C (PT100 and thermistors) | Hz, μ sec, digit, μ ε, °C (thermistors) |
| Measuring range | 4-20 mA, \pm 10 mV, \pm 400 mV, \pm 5 V, 1000 Ohm (PT-100) 10000 Ohm (thermistors), from 400 to 6000 Hz | 10000 Ohm (thermistors) from 400 to 6000 Hz |
| Measurement resolution | 1 μ A at FS 20 mA - 1 μ V at FS \pm 10 mV 10 μ V at FS \pm 400 mV - 100 μ V at FS \pm 5 V 0.001 mV/V at FS 10 mV/V - 0.1°C at FS 1000 Ohm 0.1°C at FS 10000 Ohm - 0.1 Hz at FS 400-6000 Hz | 0.1 Hz at FS 400-6000 Hz 0.1°C at FS 10000 Ohm |
| Measurement accuracy | 0.01% FS (0.1% FS for PT100 and NTC) | 0.01% FS (0.1% FS for NTC) |
| Thermal drift | 0.001% FS / °C | 0.001% FS / °C |
| Internal battery | 12 V DC, 4500 mAh Ni-MH, with protections | 12 V DC, 4500 mAh Ni-MH, with protections |
| Operating time | 8 hours (always power-on) | 8 hours (always power-on) |
| Battery charger | fast charge (2.5h), 100-240 V AC, 50-60 Hz, 35W | fast charge (2.5h), 100-240 V AC, 50-60 Hz, 35W |
| Sensor supply | Fully automated power supply selection | Fully automated power supply selection 100 |
| Input impedance | > 10 MW for voltage <2.5V > 1 MW for voltage >2.5V | - |
| Maximum sensor output current | 190 mA | 100 mA |
| Temperature range | -20°C a +60°C | 20°C +60°C |
| Storage memory | 2 GB* | 2 GB* |
| COMM port | USB 2.0, Bluetooth optional (0CDL0BTOOTH) | USB 2.0, Bluetooth optional (0CDL0BTOOTH) |
| Enclosure | ABS, IP67 protection | ABS, IP67 protection |
| Dimensions and weight | 200 x 280 x 76 mm, 2 kg | 200 x 280 x 76 mm, 2 kg |



* Readings are stored in an internal SD card and the stored data can be fast and easily transmitted to a host PC by USB cable.

The storage memory of dataloggers works like an Hard Disk: data is organized in a "site"; in each site there are the installed instruments and for each instrument the Client can store and download data, sorted by date and time.

ITEMS INCLUDED

CARRYING CASE OCDLOBAG927

Carrying bag and red customized case for easy operation at site



CD-ROM

Smart Manager Suite package and user manual



SENSOR CABLE OECAV7P6A00

Jumper cable with 6 alligator clips



USB CABLE

PC communication cable

BATTERY CHARGER OECAB12VNMNB

100-240V AC/12V DC battery charger

ACCESSORIES

SWITCH BOX CABLE OECAV07V2000

Jumper cable for switch measuring box

ADDITIONAL POWER SUPPLY OCDL012EXBP

12 V external power supply package for T-REX probe and DEX extensometers

MULTIPLEXER CABLE OECAV10MUX0

Jumper cable for direct connection to multiplexer measuring boxes



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.

CRD



— CRD 400 READOUT

READOUT UNITS
AND DATALOGGERS





CRD - 400 READOUT

CRD-400 is a new generation multipurpose readout designed to take readings of all instruments including vibrating wire.

CRD-400 permits readings in both electrical and engineering units. Battery level, readout temperature and date are always displayed.

CRD-400 comes with shoulder/belt bag, battery charger, sensor cable with 6 alligator clips and USB flash drive with user manual.

FEATURES


- Compatible with all SISGEO analog sensors
- Large coloured display
- Accurate and precise measurements
- Splash-proof hand-held case
- Powered by Ni-MH rechargeable batteries

BENEFITS

- Easy to use
- Lightweight and portable
- Right and left hand users
- Auto shutdown
- Sunlight reliable display
- Reads both electrical and engineering units



Meet the essential requirements of EMC directive 2014/30/UE and Safety Low Voltage Directive 2014/35/UE

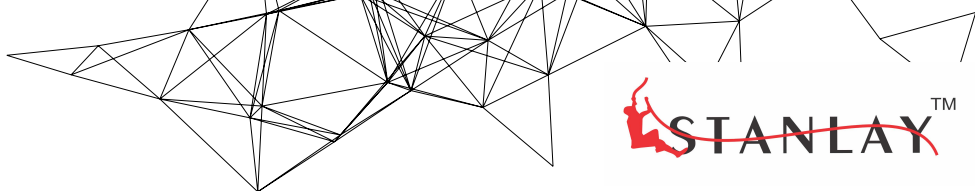

TECHNICAL SPECIFICATIONS

| | |
|------------------------|---|
| Type of measurements | mA - mV - V - mV/V - °C - Hz (µsec - digit - µε) |
| A/D converter | 24-bit Sigma-Delta ADC (22 true bit) |
| Range and power supply | Current loop (2 wires): range 0÷21 mA - Power supply: 24V DC Transmitter (3 wires): range 0÷21mA - Power supply: 24V DC Voltage (4 wires): range ±10V - Power supply: 24V DC Wheatstone bridge (6 wires): range ±10 mV/V - Power supply: 5 V DC Servo-inclinometer: range ±10000 mV - Power supply: ±12V DC Platinum RTD (Pt100): range -150°C to +150°C - Power supply: 1 mA Thermistor (NTC): range -30°C to +150°C - Power supply: 0.04mA, 0.1mA, 1mA Vibrating Wire: range 400Hz to 6000Hz - Excitation sine wave signal (adaptive): ±10 V |
| Reading resolution | 1µA at FS 20mA - 1µV at FS ±20mV - 10µV at FS ±1V - 100µV at FS ±10V 0.001mV/V at FS 10mV/V - 0.1°C for PT100 - 0.1°C for NTC 0.1 Hz at FS from 400 to 6000Hz |
| Accuracy | 0.01 % FS (0.1% for Voltage and Servo-inclinometer, 0.2% FS for PT100 and NTC) |
| Temperature drift | 0.001 % FS / °C |
| Rechargeable battery | 4 x AA, NiMH, 2400 mAh |
| Operating time | min. 4h (constant use, 24 Vdc @ 20 mA @ 25 °C, maximum backlight, 2400 mAh batteries) min. 6h (constant use, 24 Vdc @ 20 mA @ 25 °C, 50% backlight, 2400 mAh batteries) |
| Battery charger | Programmable charger, IP41, input voltage: 100-240 V AC, 50-60 Hz, 1.3A |
| Display | Amorphous silicon TFT LCD panel with LED backlight unit, 320 x 240, 3.5", sunlight reliability |

ENVIROMENTAL CONDITIONS

| | |
|-----------------------|---------------------|
| Operating temperature | from -20°C to +60°C |
| Storage temperature | from -30°C to +70°C |

PHYSICAL CHARACTERISTICS

| | |
|------------------------|-------------------------------------|
| Weight | 0.5 Kg |
| Dimensions (L x W x H) | 100 x 230 x 45 mm |
| Protection Degree | IP67 |
| Material | ABS |
| Connectors | 1 x instrument, 1 x battery charger |

CERTIFICATIONS

| | |
|------------------------------|-------------------|
| Eletromagnetic compatibility | EN 61326-1 (2006) |
| Safety requirements | EN 61010-1 (2001) |

We reserve the right to change our product without prior notice.

ITEMS INCLUDED

TRAVEL BAG

Splashproof shoulder/belt carrying bag.



BATTERY CHARGER 0ECABCRD400

100-240 Vac / 12 Vdc
battery charger



SENSOR CABLE 0ECAV8P6A00

Jumper cable with 6
alligator clips



USB FLASH DRIVE

User manual



ACCESSORIES

JUMPER CABLE 0ECAV08V2J0

Jumper cable with
2 connectors

SWITCH BOX CABLE 0ECAV08V2S0

Jumper cable for
switch measuring box



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.
The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages.
For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument.
The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

MIND



— **MIND**
READOUT

READOUT UNITS
AND DATALOGGERS





MIND READOUT

Mind is a portable and compact multichannel readout unit able to read all Sisgeo instruments, both analogue and digital. It is compact, rugged, with IP65 protection class and it is supplied with a specially designed carrying bag. The BLE (Bluetooth Low Energy) wireless technology permits a fast and safe communication with Mind App, with a very low batteries' consumption. Mind is fully managed by Mind App which is compatible with Android operating system and with iOS. Thanks to its App, Mind is a fast and light system for a quick and handy interface with the instruments, furthermore the data storage and sharing is made simpler and immediate. Mind App is also useful to read and utilize the QRcode placed on every analog Sisgeo instrument, having the identification, calibration and reading information always available.

When configuring sensors on the MIND app, calibration parameters of analog gauges (e.g. vibrating wire) can be downloaded from the Internet by entering the serial number.

MAIN ADVANTAGES

- Long battery life: minimum 8 hours continuously
- Supplied with Calibration Report issued following high level metrologic procedures
- High accuracy and resolution
- Simultaneous display of electrical and engineering measures
- Real time charts
- Quick read for immediate readings without configuration
- Multiplexers reading
- One-touch reading of digital gauge arrays
- Geolocation and search engine for sites and sensors
- Display the plot of vibrating wire sensor signal's spectrum with peak value
- Embedded Digital Sensor Configuration (DSC) tool



Meet the essential requirements of RED Directive 2014/53/EU,
Certified for extended environmental conditions: altitude up to 3000m

MIND APP


Thanks to its app, Mind is light system for a quick and handy interface with the instruments. The data storage and sharing is made simpler and immediate. Mind APP is also useful to read the QRcode placed on every analog Sisgeo instrument, having the identification, calibration and reading information always available.

Minimum Device Specifications
(device not supplied by SISGEO)

Bluetooth Low Energy BLE 4.2
APPLE iOS 16 or higher
Android OS 10 or higher




APP OVERVIEW

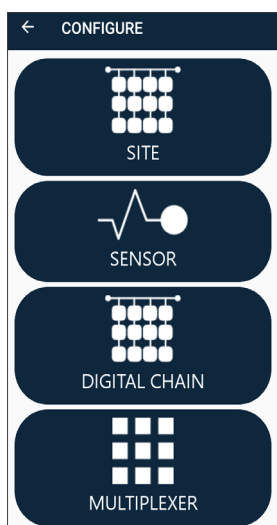


Instruments configuration main page.




QR code scanner for automatic configuration of analog sensors.

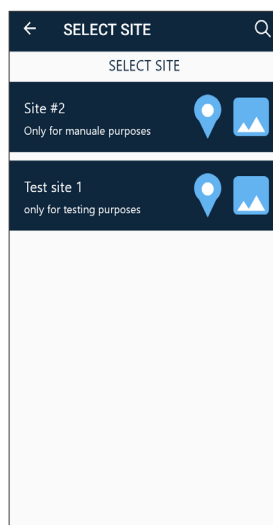


List of site with selectable icons to have info of geographical positioning and related picture.

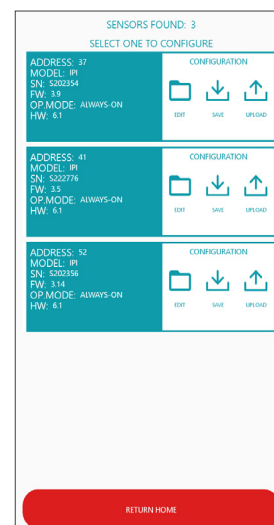


DSC (Digital Sensors Configuration) tool main page.

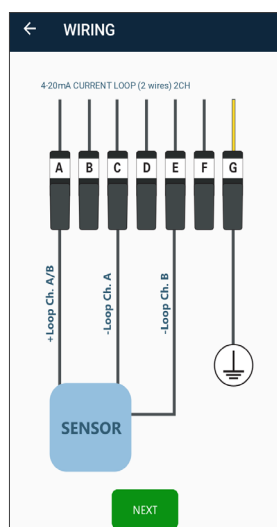

Guided clips wiring connection.

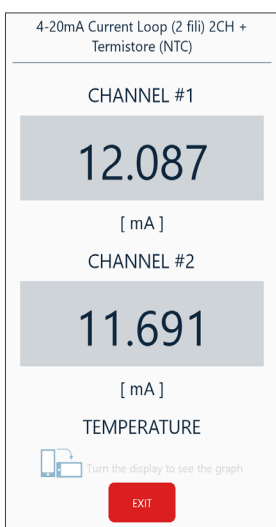

Instrument reading page with both biaxial 4-20mA current loop channels reading. The temperature measure is displayed scrolling down.

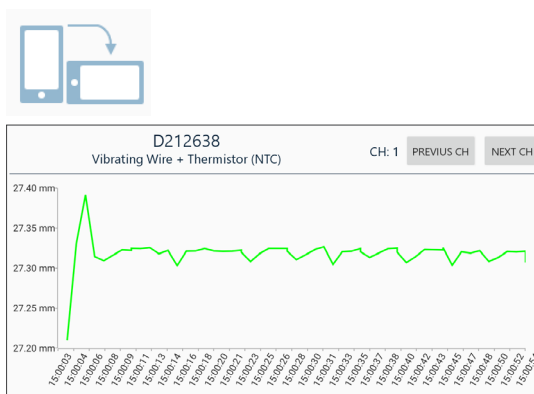

Graph of connected sensor's readings. It is generated just turning the mobile device in horizontal position.

MIND READOUT PHYSICAL FEATURES

| | |
|------------------------------------|---|
| Material / Weight | Aluminum / 1 Kg |
| IP class ⁽¹⁾ | IP65 |
| Overall dimensions | 205x128x45 mm |
| Operating temperature | -20 to +55°C (charging +5°C to +40°C) |
| Storage temperature ⁽²⁾ | -10 to +45°C for max 6 months, -20 to -10°C for max 1 month |
| Relative humidity | Operating: 60 ±25% RH Storage: 60 ±25% RH |

(1) IP65 protection class is granted with closed connectors (i.e. with their own cap or with the cable connected) and with the on/off button not pressed.

(2) The periods indicated (6 months and 1 month) are the maximum time frames within which MIND must be recharged to not lose capacity and performance of its battery.



SISGEO COMPATIBLE INSTRUMENTS

| | | |
|--|--------------------------------------|--|
| Uniaxial 4-20mA current loop 2-wire gauges | Ratiometric 6-wire gauges | Vibrating wire gauges |
| Biaxial 4-20 mA current loop 2-wire gauges | RTD PT-100 temperature gauges | Vibrating wire + NTC Thermistor gauges |
| Biaxial 4-20 mA current loop 2-wire gauges + Thermistor | NTC Thermistor temperature gauges | Digital gauges or arrays with RS-485 Modbus RTU |

OTHER COMPATIBLE SENSORS

| | | |
|--|--|---|
| Uniaxial and biaxial 4-20mA transmitters, 3-wire and 4-wire gauges | Carlson instruments 4-wire gauges | Uniaxial and biaxial servo-inclinometer gauges |
| Uniaxial and biaxial 4-20mA transmitters, 3-wire gauges + Thermistor | Carlson thermometers 3-wire gauges | RTD PT-100 temperature gauges 3-wire gauges |
| Ratiometric 4-wire gauge | Uniaxial and biaxial voltage gauges | Vibrating wire double coils gauges |
| Resistive strain gauge 1/2 bridge and 1/4 bridge | Uniaxial and biaxial potentiometers | |

TECHNICAL SPECIFICATIONS⁽¹⁾

A - ANALOG INPUTS

| | |
|------------------------------------|---|
| Number of channels | 3 |
| Analog-to-Digital Conversion (ADC) | Resolution: 24bit, sampling rate: 2.5 Hz per channel with 50/60 Hz mains frequency rejection, Modulation method sigma-delta |
| Input impedance | >10 kΩ |

A.1 - MEASUREMENT TYPES

A.1.1 - 4-20mA current loop (2 wires)

| | |
|-------------------------------|---|
| Range Resolution Accuracy | 0-24 mA 1 μA at range 20 mA 6.0 μA |
| Internal shunt resistor | 100 Ω |
| Power supply (up to 100 mA) | 24V DC, 12V DC, external (selectable by the software) |
| Temperature drift | < 10 ppm / °C, range -30°C to +70° |

A.1.2 - Wheatstone full bridge (6 wires, with sensing)

| | |
|-------------------------------|-------------------------------------|
| Range resolution accuracy | ±15mV/V 0.001 mV/V 0.005mV/V |
| Power supply (up to 80 mA) | 5 Vdc, external |
| Max and min bridge resistance | Max 10 kΩ - min 200 Ω |
| Temperature drift | < 10 ppm / °C, range -30°C to +70°C |

A.1.3 - Platinum RTD (Pt100) 4-wire

| | |
|-------------------------------|-------------------------------------|
| Range resolution accuracy | -150°C to +150°C 0.1°C 0.3 °C |
| Power supply | 1 mA |
| Temperature drift | < 10 ppm / °C, range -30°C to +70°C |


A.1.4 - Thermistor (NTC 3 kΩ @ 25 °C)

| | |
|-------------------------------|--|
| Range resolution accuracy | -50°C to +150°C 0.1°C 0.2°C |
| Power supply | 2-100 uA |
| Temperature drift | < 10 ppm / °C from 0 to 150 °C < 20 ppm / °C from 0 to -30 °C < 100 ppm/°C from -30°C to -50 °C; |

A.1.5 - Vibrating Wire sensors

| | |
|-----------------------------|---|
| Range accuracy | 300 to 6000 Hz 0.0033% FS |
| Excitation sine wave signal | Up to 12 Vpp (selectable by the software) |
| Resolution | 0.01Hz at range 300÷1000Hz 0.02Hz at range 1000÷3000Hz 0.1Hz at range 3000÷6000Hz |
| Temperature drift | <10ppm/°C (-30°C to +70°C) |

(1) The information and data in the "Technical specifications" table refer to tests performed with a calibrated control unit in an environment with controlled temperature and humidity, and using signal generators with cables shorter than 5 m.

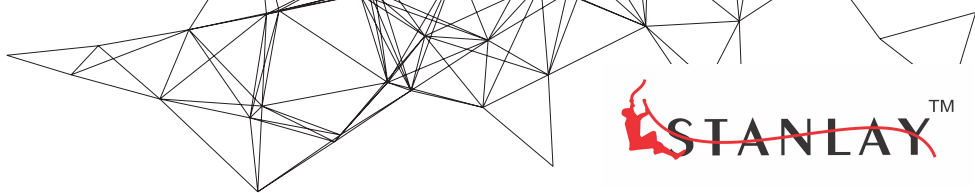

B - DIGITAL RS485 INPUTS

| | |
|-------------------------------|---|
| Max number of gauge per array | according to the consumption of each type of sensor and if configured in Always-on mode or in Timed mode |
| Interface and Protocol | RS485, MODBUS RTU |
| Power supply (up to 500 mA) | up to 24 V DC |

C - COMMUNICATION WITH DEVICE

| | |
|--------------------------------|--|
| BLE (Bluetooth Low Energy) 5.2 | band: 2.4 GHz ISM Band (2402-2480 MHz) - power: 4dBm Max |
| Led | Different colors for local notifications |

D - ON-BOARD DIAGNOSTIC SENSORS

| | |
|--------------------------------------|--|
| D.1 - INTERNAL TEMPERATURE | Range: -40°C to +125°C Resolution: 0.1°C Accuracy: ±1°C (-10°C to +85°C) |
| D.2 - INTERNAL HUMIDITY | Range: 0 to 100%RH Resolution: 0.1% RH Accuracy: ±5% (0 to 95%RH) |
| D.3 - BATTERY VOLTAGE MONITOR | Range: 0 to 18 V Resolution: 0.1 V Accuracy: ±5% FS |

E - BATTERIES

| | |
|--------------------------------------|--|
| Battery type - Voltage and capacity | Li-Ion rechargeable batteries - 7.4V - 2.6Ah |
| Operating time with Li-Ion batteries | min. 8h (constant use, 24 Vdc @ 20 mA x 2 @ 25 °C) |
| Charging temperature range | 0°C to +45°C |

F - BATTERY CHARGER

| | |
|--------------------------------|--|
| Input voltage | 50-60 Hz 90-264 Vac |
| IP Class and temperature range | IP41 (for internal use only), Operating: -25°C to +40 °C |
| Max output power | 10 W |

G - OTHER COMPATIBLE SENSORS⁽²⁾

G.1 - 4-20mA transmitters (3-4 wires)

| | |
|-------------------------------|-------------------------|
| Range Resolution Accuracy | 0-24 mA 1 µA 6.0 µA |
|-------------------------------|-------------------------|

G.2 - Voltage 4 wires, differential

| | |
|-------------------------------|--------------------|
| Range Resolution Accuracy | ±12V 1 mV 4 mV |
|-------------------------------|--------------------|

G.3 - Servo inclinometers

| | |
|-------------------------------|--------------------|
| Range resolution accuracy | ±10V 1 mV 2 mV |
|-------------------------------|--------------------|

G.4 - 1/2 Wheats. bridge (5 wires, with sensing)

| | |
|-------------------------------|-----------------------------------|
| Range resolution accuracy | ±15 mV/V 0.005 mV/V 0.05 mV/V |
|-------------------------------|-----------------------------------|

G.5 - 1/4 Wheats. bridge (3 wires, w/o sensing)

| | |
|-------------------------------|-----------------------------------|
| Range resolution accuracy | ±15 mV/V 0.005 mV/V 0.05 mV/V |
|-------------------------------|-----------------------------------|

G.6 - Potentiometers

Range | resolution | accuracy

5V | 1 mV at range ± 5 V | 1 mV at range ± 5 V

G.7 - Wheatstone full bridge (4 wires, without sensing)

Range | resolution | accuracy

± 15 mV/V | 0.001 mV/V | 0.005 mV/V

G.8 - Carlson instruments (4 wires)

Range | resolution | accuracy

$\pm 10\%$ (ratio) | 0.01% (ratio) | 0.1% (ratio)

G.9 - Carlson thermometer (3 wires)

Range | resolution | accuracy

± 150 °C | 0.1°C | ± 1 °C

G.10 - PT-100 (Platinum RTD) (3 wires)

Range | resolution | accuracy

± 150 °C | 0.1°C | ± 1 °C

G.11 - Vibrating wire double coils (4 wires)

Range | accuracy

300 to 6000 Hz | 0.0033% FS

Excitation sine wave signal

Up to 12 Vpp (selectable by the software)

Resolution

0.01Hz at range 300÷1000Hz
0.02Hz at range 1000÷3000Hz
0.1Hz at range 3000÷6000Hz

Temperature drift


<10ppm/°C (-30°C to +70°C)



ACCESSORIES AND SPARE PARTS

JUMPER CABLE OECAV08V2J0

Jumper cable for MIND connection to an instrument supplied with military connector.



SWITCH BOX JUMPER CABLE OECAV08V2S0

Jumper cable for MIND connection to a switch terminal box.




MUX BOX-MIND JUMPER CABLE OECAVMINDMU

Jumper cable for direct connection from MIND to multiplexer boxes. NOTE: only new MUX BOX with M12 connector can be read with MIND. Old MUX-BOX with MIL connector which could be read with New Leonardo cannot be read with MIND.



7-CLIPS SENSOR CABLE (SPARE) OECAV8P6A00

Jumper cable with 7 alligator clips for instrument reading on signal cable wires.



DIGITAL GAUGE JUMPER CABLE (SPARE) OECAV8PDIGO

Jumper cable for MIND connection to digital gauges.



MIND CARRYING BAG (SPARE) OMIND1BAG00

Specially designed carrying bag for MIND readout. It includes shoulder belt.



BATTERY CHARGER (SPARE) OECABMIND00

Charger for Li-Ion batteries. Input voltage 90-264 Vac, 50-60 Hz IP rate IP41 Max output power 10 W



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l. The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages. For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument. The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

OMNIA



OMNIAlog

23/10/15 08:16:31
LOG DL SYS
IP: 192.168.1.111
Bat: 14.0V - T: 28.3°C - H.N.C.

— OMNIALOG DATALOGGERS

READOUT UNITS
AND DATALOGGERS





OMNIALOG DATALOGGER

The OMNIAlog has been designed "in house" by Sisgeo and is the result of over 25 years experience using different dataloggers in geotechnical field.

OMNIAlog is a versatile, cost effective and low powered datalogger supporting vibrating wire and all major geotechnical sensors.

OMNIAlog has a mini web server on board, 24 local analog channels, expandable to 408 channels through multiplexers and 2 digital opto-isolated input ports. It can be managed by any Internet browser and also includes a USB flash drive support.

APPLICATIONS

- Tunnelling
- Dam surveillance
- Structural monitoring
- Mining exploration
- Deep excavation
- Landslide safety implementation
- Retaining walls
- Geotechnical investigation campaign

FEATURES

- No software required
- LAN Ethernet, USB and RS232 Comm ports
- High performances
(resolution, accuracy, environment -30°C +70°C)
- 32GB internal memory
- Stand alone or part of network
- Vibrating wire built-in interface
- Digital sensors support
- Compatible with all major geotechnical sensors



Meet the essential requirements of the EMC Directive 2004/108/EC and low voltage Directive 2006/95/EC

TECHNICAL SPECIFICATIONS

| CPU AND MEMORY | OMNIALOG GT-2400 | OMNIALOG GT-100D |
|----------------------------|---|------------------|
| Processor | ARM Cortex-M3 MCU with 1 MB Flash, 120 MHz CPU, ART Accelerator, Ethernet | |
| RAM Memory | 1 Mbyte RAM with backup | |
| Mass storage | SD CARD 32 GB (*) and WEB pages | |
| Clock accuracy | High precision RTC (real time clock with battery back-up) self compensated in temperature (3ppm @ 25°C, 10ppm @ -30 +70°C) | |
| On-board sensors | Temperature measured on the electronic board (accuracy ±1 %) | |
| INPUT | | |
| Analog differential inputs | 24 differentials individually configured. Channel expansion provided by SISGEO multiplexers | - |
| Digital inputs | Two opto-isolated digital inputs individually selectable for switch closure, high frequency pulse and trigger. Independent 32-bit counters for each input. Max Input Voltage: 24V (Max Current: 10mA) Min Input Voltage: 5V (Max Current: 2mA) | |
| INTERFACES | | |
| Display & Keyboard | Small backlight graphic LCD 128x64 dpi with membrane keyboard for the minimal local management without the PC. Keyboard for start a uniscan, sequential display of the last memorized readings for each channel (sensor ID, converted unit reading, UM), device status, data download and FW/web pages update by USB pen drive, safe mode (back-up/format/restore internal SD card) | |
| LAN ethernet isolated | 10/100 Mbps, RJ45 | |
| RS232 | 9-pin, DE9: DCE port for GSM/GPRS modem connection Baud Rates: selectable from 9600 bps to 115.2 kbps (default setting) Default Format: 8 data bits; 1 stop bits; no parity | |
| USB | USB 2.0 flash drive only (FAT 32), 5 V 200 mA | |
| RS485#1 opto-isolated | 5 screw clamp: DCE port for max. No.250 SISGEO digital sensors Communication interface: RS485 Communication protocol: MODBUS RTU (SISGEO Protocol) The voltage ‘V OUT’ is switched on and off under program control. V OUT is the unregulated input power supply ‘V IN’ (1 A) Power supply management (always on or energy safe) | |
| RS485#2 opto-isolated | 5 screw clamp: DCE port for max. 16 SISGEO multiplexer boards connection. Communication interface: RS485 Communication protocol: MODBUS RTU (SISGEO Protocol) The voltage ‘V OUT’ is switched on and off under program control. V OUT is the unregulated input power supply ‘V IN’ (1 A) Every channel of each multiplexer board is completely independent. | |
| SWITCHED OUTPUT | The voltage ‘V OUT’ is switched on and off under program control. | |
| POWER SUPPLY | V OUT is the unregulated input power supply ‘V IN’ (2 A) | |

(*) Including system files

ANALOG MEASUREMENTS

OMNIALOG GT-2400

OMNIALOG GT-100D

Measurement rate (MR)

High precision measurement (low speed, 5 sps):
Init. analog (with auto-calibration): 27.80 sec
Instrument warm-up: depending on sensor configuration
Measurement: 5.41 sec

Standard measurement (20 sps):
Init. analog (with auto-calibration): 7.1 sec
Instrument warm-up: depending on sensor configuration
Measurement: 1.57 sec

Fast measurement (High speed 40 sps):
Init. analog (no auto-calibration): 2.65 sec
Instrument warm-up: depending on sensor configuration
Measurement: 0.45 sec

Note1: times indicated not valid for vibrating wire measures
Note2: init. analog phase is made only one time before the measurement cycle

-

Type of measurements

mA, mV, V, mV/V, °C, Hz (µsec, digit)

-

ADC

24-bit (22 true bit) differential
Analog-to-Digital Converters, 5SPS, 0-24
Average Function, auto-calibration and auto-range

-

Range and power supply

Current loop (2 wires): range 0÷25 mA
Power supply (selectable by the software, up to 100 mA):
24V DC, 10V DC, external

Transmitter (3-4 wires): range 0÷25mA
Power supply (selectable by the software, up to 100 mA):
24V DC, 10V DC, external

Voltage (4 wires): range ±100mV, ±1V, ±10V
Power supply (selectable by the software, up to 100 mA):
24V DC, 20V DC, 10V DC, 5 V DC ,external

Servo inclinometer: range ±5V
Power supply (selectable by the software): ±12V DC
(dual), external

Wheatstone bridge (6 wires, with sensing): range ±10mV/V
Power supply (selectable by the software, up to 80 mA):
10 V DC , 5 V DC, external (max 10 Vdc)
Maximum bridge resistance: 10 kΩ
Minimum bridge resistance: 200 Ω

Platinum RTD (Pt100): range -150°C to +150°C
Power supply: 1.2 mA

Potentiometer: range ±2.5V
Power supply (selectable by the software): 10V DC, 5V DC

Thermistor (NTC): range -50°C to +150°C
Power supply: 0.05mA / 0.1mA / 1.2mA

Vibrating Wire: range 400Hz to 6000Hz
Excitation sine wave signal (adaptive): ±10 V

-

Reading resolution

1 µA at range 20 mA
10 µV at range ±100 mV - 100 µV at range ±1 V
1 mV at range ±10 V - 0.1 °C for Pt100 - 0.1 °C for NTC
0.1 Hz at range 6000 Hz - 0.001 mV/V at range ±10 mV/V

-

Measurement accuracy

0.01 % F.S. (0.1 % F.S. for Pt100 and NTC) with Standard
Measurement
Calibration in Sisgeo laboratories recommended every
2 years.

-

— **WR LOG**
WIRELESS MONITORING
SYSTEM

READOUT UNITS
AND DATALOGGERS





WR LOG WIRELESS MONITORING SYSTEM

WR LOG wireless monitoring system nodes can be connected to a wide variety of sensors and communicate with the Gateway using a Long Range Radio. Nodes can be easily set up through an Android app and the system offers a simple visualization web based software.

WR LOG is a low power consumption system that can reach up to 10 years battery life. Distance between node and gateway can arrive up to 15 km.

The system allows the remote connection and offers near real time data that can be pushed to other visualization softwares through FTP, API calls and Modbus TCP.

FEATURES

- Long-range communication of over 15km
- Truly low-power, 10 years of unattended runtime
- Wireless LPWA communication
- Supports most structural and geotechnical instruments
- User-friendly web software

BENEFITS

- Remotely monitor hard-to-access infrastructures
- Cover a wide area with geotechnical sensors
- Easily add sensors to extend measurement range
- Save resources through fast implementation
- Diminish risks and make operations safer



Meet the essential requirements of the EMC Directive 2014/30/EU and RED directive 2014/53/EU

4G GATEWAY OLSWR000GW4

It is an outdoor LoRa gateway equipped with a 4G Worldwide module with 3G/2G fallback. The gateway receives readings from the nodes and pushes data through the integrated 4G modem to a server for management and visualization. It includes an external waterproof connectors (RJ45, SIM card), an easy installation mounting kit and USB (Type C) connector for local access. The internal processor can manage up to 50 data messages every minute in single gateway network architecture. The gateway incorporates 1 x green LED for power and 1 x red LED for system status. The SIM card port accepts mini-SIM format.

TECHNICAL SPECIFICATIONS

PRODUCT CODES: ⁽¹⁾

OLSWR868GW4

OLSWR915GW4

OLSWR923GW4

RX: 863- 873MHZ, TX: 863-873MHZ

RX: 902-915MHZ, TX: 922-928MHZ

RX: 915-928 MHz, TX: 915-928MHZ

(according to hardware capabilities)

BASE STATION

Band

ISM Sub 1 GHz

sensitivity down to -137 dBm (SF11)

Integrated internal antennas

GPS, 4G and LoRa (peak gain = 2.6dBi)

Memory

DDRAM 256MB, 8GB eMMC

(6GB available for user)

GNSS receiver

GPS, GLONASS, QZSS & SBAS

External antenna (included)

3 dBi vertical omni-directional, 30cm length
868/915/923 MHz

POWER

Powered by

- PoE both Mode A and Mode B

(802.3af specifications)

- ±48 VDC through RJ45 (isolated power)

Mean power consumption

4.5 Watts

Power over Ethernet

PoE injector for indoor use included in the kit

NETWORK INTERFACES

Ethernet

10/100 Ethernet WAN (RJ45 PoE)

(LAN cable not included)

Integrated 4G Modem ⁽²⁾

Worldwide LTE, UMTS/HSPA+ and

GSM/GPRS/EDGE coverage



PHYSICAL FEATURES

Overall Dimensions

265x165x100 mm without
ext. antenna

Weight

1.4 kg (mounting kit included)

IP class

IP67

Materials: Back

Aluminum

Front

Polycarbonate

Mounting kit

Stainless steel

Operating temp. range

-40°C to +60°C

(1) For more information regarding how to choose the right Gateway band, see FAQ #089 on our web site www.sisgeo.com

(2) WWAN capabilities are listed in F.A.Q. #107 on www.sisgeo.com.

VIBRATING WIRE NODES OLSWR1CHVWS/OLSWR5CHVW0

The vibrating wire nodes are able to manage 1 or up to 5 vibrating wire instruments such as piezometers, crack meters, strain gauges, etc... It has an embedded barometer useful for piezometers' data compensation. Examples of application are column of multipoint piezometers, 3-D crack meters, rosette-mounting strain gauges, multipoint extensometers. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|--|
| Number of channels | 1 or 5 (vibrating wire + thermistor) |
| Sampling rate | 30 seconds to 1 day |
| Internal data storage | Up to 72500 readings incl. time and 5 sensors Up to 200000 readings incl. time and 1 sensor |
| Time synchronization by radio | time discipline better than ± 10 seconds |
| Power supply | 1 CH: 1 x C-size 3.6V high power battery 5 CH: from 1 to 4 x C-size 3.6V high power batteries |

VIBRATING WIRE INPUT

| | | | |
|--------------------|--|----------|------------|
| Measurement method | Embedded algorithms increasing immunity to noise | | |
| Excitation wave | ± 5 V | | |
| Measurement range | 300 to 7000 Hz | | |
| | Excitation frequency | Accuracy | Resolution |
| Sweep A | 450 - 1125 Hz | 0.013% | 0.002 Hz |
| Sweep B | 800 - 2000 Hz | 0.008% | 0.002 Hz |
| Sweep C | 1400 - 3500 Hz | 0.010% | 0.004 Hz |
| Sweep D | 2300 - 6000 Hz | 0.009% | 0.007 Hz |

THERMISTOR INPUT

| | |
|-------------------|----------------------------|
| Measurement range | 0 Ω to 4 M Ω |
| Resolution | 1 Ω |
| Accuracy (20°C) | 0.05°C (0.04% FS) |

EMBEDDED BAROMETER

| | |
|---|-----------------|
| Pressure Range | 300 to 1100 hPa |
| Relative Accuracy (950 to 1050 hPa at 25°C) | ± 0.12 hPa |

PHYSICAL FEATURES

| | |
|--|-------------------------------------|
| Box Dimensions (WxLxH) | |
| 1 channel node | 100x100x61 mm |
| 5 channels node | 100x200x61 mm |
| Overall Dimensions without antenna (WxLxH) | |
| 1 channel node | 140x120x61 mm |
| 5 channels node | 140x220x61 mm |
| External antenna | 114 mm length (including connector) |
| Housing material | Aluminium alloy |
| IP class | IP67 |
| Weight (without antenna and batteries) | |
| 1 channel node | 0.66 kg |
| 5 channels node | 1.27 kg |
| Operating temperature | -40°C to +80°C |

BATTERY LIFE ESTIMATION⁽¹⁾

| | |
|--------------------------------------|-----------|
| 1 CH, sampling 5 min, 1 x battery | 1 year |
| 1 CH, sampling 1 hour, 1 x battery | 3.5 years |
| 5 CH, sampling 5 min, 4 x batteries | 2.2 years |
| 5 CH, sampling 1 hour, 4 x batteries | 7.1 years |

(1) Based on mathematical model using SAFT LSH14 batteries, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Bear in mind that consumption varies depending on the sensor used, sampling rate and environmental conditions.

ANALOG NODE OLSWR4CHANLO

Analog nodes are 4 channel devices that support several voltage output, 4-20mA output, potentiometer, Wheatstone bridge, thermistor and PT100. Each channel can be individually configured according to the sensor output.

Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Number of channel | up to 4 (individually configurable by the user) |
| Sampling rate | 30 seconds to 1 day |
| Internal data storage | Up to 200000 readings incl. time and 1 sensor Up to 72500 readings incl. time and 4 sensors) |
| Time synchronization by radio | time discipline better than ± 10 seconds |
| Instruments power supply | 5 V DC / 12 V DC / 24 V DC (up to 60 mA) selectable for each channel |
| Power supply | from 1 to 4 x C-size 3.6 V high power battery |
| INSTRUMENT INPUTS | |
| Voltage measuring ranges | ± 10 V DC |
| Voltage output accuracy (-40 to +85°C) | ± 0.05 % FS |
| Current loop 4-20mA accuracy (-40 to +50°C) | ± 0.05 % FS |
| Potentiometer accuracy (0 to +50°C) | ± 0.02 % FS |
| Wheatstone bridge accuracy (0 to +50°C) | ± 0.1 % FS (full bridge) ⁽¹⁾ |
| Thermistor accuracy (0 to +50°C) | ± 0.2 °C |
| PT-100 accuracy (20°C) | ± 0.8 °C |

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

PHYSICAL FEATURES

| | |
|---|--|
| Box Dimensions (WxLxH) | 100x200x61 mm |
| Overall Dimensions without antenna (WxLxH) | 140x220x61 mm |
| External Antenna | 114 mm length (including connector) |
| Housing material | Aluminium alloy |
| IP class | IP67 |
| Operating temperature | -40°C to +80°C |
| Weight (without antenna and batteries) | 1.10 kg |

BATTERY LIFE ESTIMATION⁽²⁾

| | Current @ 12V @ 24 mA, SF9 | Current @24V @24 mA, SF9 | Voltage @ 12V @ 24 mA, SF9 | Full Wheatstone bridge @5V @350 Ω , SF8 | POT @5V @1 k Ω , SF8 |
|--------------------------------|-------------------------------|-----------------------------|-------------------------------|---|--------------------------------|
| Warm-up time | 1 seconds | 1 seconds | 1 seconds | - | - |
| 1 channel, sampling 5 minutes | 6 months | 4 months | 5.4 months | 1.4 years | 1.5 years |
| 1 channel, sampling 6 hours | >10 years | >10 years | >10 years | >10 years | >10 years |
| 4 channels, sampling 5 minutes | 2.2 months | 1.4 months | 2 months | 3.8 months | 5.2 months |
| 4 channels, sampling 6 hours | 8.8 years | 6.4 years | 8.4 years | >10 years | >10 years |

(2) Estimations with 4 SAFT LSH14 batteries, based on mathematical models. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

MINI NODE OLSWR1CHANPO

The Mini node is the easiest way to connect an electric load cell to WR LOG wireless network. Mini node can also manage potentiometers, ratiometric sensors and pulses (i.e. rain gauges). On a dedicated channel can be also connected a thermistor probe. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | |
|--------------------------|---|
| Number of channels | 1 individually (configurable, no thermistor) 1 thermistor (not configurable) 1 pulse counter (not configurable) |
| Sampling rate | 30 seconds to 1 day |
| Internal data storage | Up to 200000 readings incl. time |
| Instruments power supply | 5 V DC (up to 50 mA) |
| Power supply | 1 or 2 x C-size 3.6 V high power battery |

INSTRUMENT INPUTS

| | |
|---|--|
| Potentiometer/Ratiometric measuring ranges | 0÷5 V DC , 0÷1 V/V |
| Potentiometer/Ratiometric accuracy (-40 to +80°C) | 0.1% FS |
| Full Wheatstone bridge measuring ranges | ±7.8 mV/V (4-wires) ⁽¹⁾ |
| Full Wheatstone bridge accuracy (-40 to +80°C) | 0.13 %FS |
| Single-ended voltage ranges | 0÷5 V DC |
| Single-ended voltage accuracy (-40 to +80°C) | 0.6% FS |
| Thermistor measuring ranges | 0 to 2 MΩ |
| Thermistor ⁽²⁾ accuracy (-40 to +80°C) | 0.04 °C (thermistor sensor error not included) |
| Pulse (dry contact) accuracy | ±1 pulse |
| Pulse (dry contact) rate | 0 to 50 Hz |
| Built-in temperature sensor accuracy | ±2°C |

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

(2) Thermistor model: 3000 Ω@25°C

PHYSICAL FEATURES

| | |
|----------------------------|------------------|
| Box Dimensions (WxLxH) | 113x80x60 mm |
| Overall Dimensions (WxLxH) | 120x80x60 mm |
| Housing material | Polycarbonate |
| IP class | IP67 |
| Operating temperature | -40°C to +80°C |
| Weight (without batteries) | 0.24 kg |
| Antenna | Internal antenna |

BATTERY LIFE ESTIMATION⁽³⁾

| | 1 x battery | 2 x batteries |
|--------------------|-------------|---------------|
| sampling 5 minutes | 0.9 year | 1.8 years |
| sampling 1 hour | 5.0 years | 8.1 years |
| sampling 6 hours | 6.5 years | 9 years |

(3) Based on the lifetime mathematical model, SF9, potentiometer + thermistor. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

DIGITAL NODE

PRODUCT CODE OLSWRDIG000

Digital node can manage 1 chain of Sisgeo digital instruments such as BH-profile in-place inclinometers, MD-Profile inclinometers, LT-Inclibus, MEMS in-place inclinometers, tiltmeters, Railway Deformation System (RDS), extensometer probes (DEX), extenso-inclinometer probes (DEX-S), liquid settlement system (H-level), load cells and multipoint borehole extensometers (MPBX), amongst others. For the maximum number of gauge in the chain and the needed power supply, please refer to the related table in next page. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | |
|-------------------------------|---|
| Input | One RS485 channel and two SDI-12 channels |
| RS485 mode | Modbus RTU, full or half-duplex supported |
| Instruments power supply | regulated 12 VDC (up to 200 mA) |
| Sampling rate | 30 seconds ¹ to 1 day |
| Time synchronization by radio | time discipline better than ±30 seconds |
| Power supply | 4 x C-size 3.6 V high power battery |

(1) Depending from the model of the gauges connected, numbers and powering mode

PHYSICAL FEATURES

| | |
|--|-------------------------------------|
| Box Dimensions (WxLxH) | 100x200x61 mm |
| Overall Dimensions without antenna | 140x220x61 mm |
| External Antenna | 114 mm length (including connector) |
| Housing material | Aluminium alloy |
| Operating temperature | -40°C to +80°C |
| IP grade | IP67 |
| Weight (without batteries and antenna) | 1.15 kg |

INTERNAL BATTERY LIFE ESTIMATION⁽²⁾

| | |
|--|------------------------|
| 10 IPI (always on), sampling 5 minutes | 60 days |
| 30 IPI (always on), sampling 5 minutes | 12 days |
| 30 IPI (always on), sampling 30 minutes | 72 days (2.3 months) |
| 30 IPI (always on), sampling 6 h | 864 days (28.4 months) |
| 10 IPI (timed mode), sampling 5 minutes | 80 days |
| 30 IPI (timed mode), sampling 5 minutes | 22 days |
| 30 IPI (timed mode), sampling 30 minutes | 130 days (4.3 months) |
| 30 IPI (timed mode), sampling 6 h | 1500 days (4.1 years) |

(2) Considering laboratory conditions. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Data not valid for powering with external solar power kit.

MAXIMUM NUMBER OF DIGITAL INSTRUMENTS CONNECTED TO DIGITAL NODE

| INSTRUMENT MODEL | MAXIMUM NUMBER OF GAUGES PER NODE WITH SISGEO V3 PROTOCOL | NEEDED EXTERNAL POWER SUPPLY ⁽¹⁾ | NEEDED INSTRUMENTS' POWER CONFIGURATION ⁽²⁾ |
|---|---|---|---|
| Digital BH-Profile IPLs, uniaxial and biaxial (model S431HD, S432HD, S441HD) | up to 30 gauges ⁽³⁾ | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digital IPLs, uniaxial and biaxial (Model S411HD, S412HD, S421HD) | up to 30 gauges ⁽³⁾ | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digital MD Profiles, uniaxial and biaxial (Model MDP30V, MDP30H) | up to 30 gauges ⁽³⁾ | NO | from 1 to 30 gauges: ALWAYS-ON or TIMED |
| Digital LT Inclibus, uniaxial and biaxial ⁽⁴⁾ (Model LTIBV, LTIBH) | up to 30 gauges ⁽³⁾ | NO | from 1 to 30 gauges: ALWAYS-ON or TIMED |
| Digital Tiltmeters, uniaxial and biaxial (Model S541HD, S542HD) | up to 30 gauges ⁽³⁾ | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digital H-Levels (Model HLEV000D) | up to 30 gauges | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digital RDS gauges (Model S7RDSHD) | up to 30 gauges ⁽³⁾ | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digital DEX and DEX-S gauges (Model DEX350000D, DEX35S000D) | up to 18 gauges | YES | from 1 to 18 gauges: TIMED |
| Digitalized anchor load cells (Model L200 + 0ELCDIG4850) | up to 30 gauges | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digitalized Resistive Piezometers (Model P235) <i>Available on request</i> | up to 30 gauges | NO | from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED |
| Digitized MPBX or MEXID extensometers up to 2 anchor points each extensometer (Model D2MX02D) | up to 30 extensometers | NO | from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 30 extensom: TIMED |
| Digitized MPBX or MEXID extensometers 3 anchor points each extensometer (Model D2MX03D) | up to 18 extensometers | NO | from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 18 extensom: TIMED |
| Digitized MPBX or MEXID extensometers up to 6 anchor points each extensometer (Model D2MX04D) | up to 12 extensometers | NO | from 1 to 12 extensometers: ALWAYS-ON or TIMED |

(1) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit).

(2) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(3) Extensible up to 50 units using "50 incl sin" protocol, under certain conditions: all the sensors in the chain shall be same model of sensors, shall be tilt sensors (uniaxial or biaxial, triaxial sensors are not allowed), output measuring unit shall be sin(angle), powering mode shall be TIMED with warm-up time 3 seconds and address delay 3 seconds, sensors shall have continuous RS-485 addresses from 1 to X (with $X \leq 50$).

(4) Each LTIInclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

MAXIMUM NUMBER OF 360° INCLINOMETERS CONNECTED TO DIGITAL NODE

| INSTRUMENT MODEL | PROTOCOL UTILIZED ⁽¹⁾ | MAX. NUMBER OF GAUGES PER NODE | NEEDED EXT. POWER SUPPLY ⁽²⁾ | INSTRUMENTS' POWER CONFIGURATION ⁽³⁾ |
|---|----------------------------------|--------------------------------|---|--|
| 360° digital tiltmeters, triaxial (model 0S543HD3600) | INCLI360_1-2-3 | 40 | NO | from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED |
| | INCLI360_1-4 | 50 | | |
| | INCLI360_2-5 | 50 | | |
| | INCLI360_3-6 | 50 | | |
| | INCLI360_ACC | 50 | | |
| 360° digital LT-Inclibus, triaxial ⁽⁵⁾ (model 0LTIB103602, 0LTIB203602 and 0LTIB403602) | INCLI360_1-2-3 | 40 | NO | from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED |
| | INCLI360_1-4 | 50 | | |
| | INCLI360_2-5 | 50 | | |
| | INCLI360_3-6 | 50 | | |
| | INCLI360_ACC | 50 | | |

(1) Various protocols are available for 360° triaxial sensors. For the most common applications, we recommend using the "INCLI360_1-2-3" protocol, which allows all three main channels of each instrument to be read.

The "INCLI360_ACC" protocol allows reading the three calibrated gravity accelerations gx, gy and gz.

To be able to use the other protocols "INCLI360_1-4" (reading channels 1 and 4), "INCLI360_2-5" (reading channels 2 and 5) and "INCLI360_3-6" (reading channels 3 and 6), check on the instrument's user manual if your application allows the use of these protocols.

(2) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit), or 0AXBCO22015 (mains power supply kit) and 0OMX24V030W (digital sensor kit).

(3) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(4) If the protocol used is "INCLI360_1-2-3," the maximum number of TIMED instruments readable with the digital node is 40.

(5) Each LT-Inclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

POWERING ACCESSORIES

If a WR-LOG digital node is used to read a string of sensors that needs to be powered separately, a solar panel power kit or a kit with mains power should be provided.

SOLAR PANEL KIT 0AX10W003AH

It consists of a 10W solar panel (supplied without pole mount) with 10m cable and IP65 plastic box that houses a 2.3 Ah battery and charge controller. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

MAINS POWER SUPPLY KIT 0AXBCO22015

It consists of an AC/DC charger (Vin 85-265 Vac, 50-60 Hz, Vout 13.4 Vdc/0.9 A), and an IP65 plastic box that houses a 2.3 Ah battery. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

DIGITAL SENSOR KIT 0OMX24V030W

Consisting of a wiring board and a 30W 12V to 24V DC/DC converter. The digital instrument kit must be installed inside the box of either the 0AX10W003AH kit or the 0AXBCO22015 kit.

WIRELESS TILTMETER OLSWR03INC90

Node with embedded tri-axis tilt meter and temperature sensor for buildings and other civil structures monitoring. The inclinometer works with respect to gravity's direction.

Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | |
|--|--|
| Sampling rate | 30 seconds to 1 day |
| Time synchronization by radio | time discipline better than ± 10 seconds |
| Power supply | from 1 to 2x C-size 3.6 V high power battery |
| INCLINOMETER SENSOR | |
| Technology | MEMS accelerometer |
| Axes | three (tri-axis) |
| Range | $\pm 90^\circ$ |
| Accuracy ($\pm 2^\circ$) | $\pm 0.0025^\circ$ |
| Accuracy ($\pm 4^\circ$) | $\pm 0.005^\circ$ |
| Accuracy ($\pm 15^\circ$) | $\pm 0.013^\circ$ |
| Accuracy ($\pm 45^\circ$) | $\pm 0.038^\circ$ |
| Accuracy ($\pm 86^\circ$) | $\pm 0.060^\circ$ |
| Resolution | 0.0001° |
| Offset temperature dependency | $\pm 0.002^\circ / ^\circ\text{C}$ |
| Repeatability | $< 0.0003^\circ$ |
| Stability @ 14 hours | $< 0.003^\circ$ |
| Built-in temperature sensor resolution | 0.1 °C |
| Built-in temperature sensor accuracy | $\pm 0.5^\circ\text{C}$ |

PHYSICAL FEATURES

| | |
|--|---|
| Box Dimensions (WxLxH) | 100x100x61 mm |
| Overall Dimensions without antenna | 150x120x61 mm |
| External Antenna | 100 mm length (including connector) |
| Housing material | Aluminium alloy |
| Operating temperature | -40°C to $+80^\circ\text{C}$ |
| IP class | IP68 (2m max 2 hours) |
| Weight (without batteries and antenna) | 0.6 kg |
| Vibration resistance | Do not subject the device to accelerations that exceed higher levels of accelerations than $\pm 8g$. |

BATTERY LIFE ESTIMATION⁽¹⁾

| | |
|---------------------------------|------------|
| sampling 30 sec - 2 x batteries | 4.8 months |
| sampling 5 min. - 2 x batteries | 3 years |
| sampling 1 hour - 2 x batteries | 9.5 years |

(1) Based on mathematical models, considering South Europe environmental conditions, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

WIRELESS TILTMETER & LASER DISTANCE GAUGE OLSWRLASEINC

Node with embedded tri-axis tiltmeter and laser distance gauge for measuring the relative distance between the gauge and another point (target or natural surface). The node include also a temperature gauge. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

| | | |
|---|--|--|
| Sampling rate | 30 seconds to 1 day | |
| Power supply | 2x C-size 3.6 V high power battery | |
| LASER DISTANCE GAUGE | | |
| Technology | Visible Laser Class II laser 655 nm | |
| Measuring range (considering favorable conditions) | from 0.05 m to 150 m | |
| Repeatability | 0.15 mm | |
| Resolution | 0.1 mm | |
| Accuracy: | favorable conditions ⁽¹⁾ | unfavorable conditions ⁽²⁾ |
| distance 1 m | ±1 mm | ±2 mm |
| distance 10 m | ±1 mm | ±2 mm |
| distance 20 m | ±1.5 mm | ±3 mm |
| distance 50 m | ±4 mm | ±7 mm |
| distance 100 m | ±9 mm | ±15 mm |
| distance 150 m | ±16 mm | not applicable |
| Built-in temperature sensor accuracy | ±1 °C | |
| TILTMETER ⁽³⁾ | | |
| Technology | tri-axis MEMS accelerometer | |
| Range | ±90° | |
| Accuracy (±2°) | ±0.0025° | |
| Accuracy (±86°) | ±0.060° | |
| Resolution | 0.0001° | |
| Offse temperature dependancy | 0.002° / °C | |
| Repeatability | <0.0003° | |
| Stability @ 14 hours | <0.003° | |

PHYSICAL FEATURES

| | |
|---|--|
| Box Dimensions (WxLxH) | 100x100x61 mm |
| Overall Dimensions without antenna | 150x120x61 mm |
| External Antenna | 100 mm length (including connector) |
| Housing material | Aluminium alloy |
| Operating temperature | -10°C to +50°C |
| IP class | IP68 (2m max 2 hours) |
| Weight (without batteries and antenna) | 0.85 kg |

BATTERY LIFE ESTIMATION ⁽⁴⁾

| | |
|---------------------------------|-----------|
| sampling 5 min, 2 x batteries | 1.6 years |
| sampling 1 hour, 2 x batteries | 9.1 years |
| sampling 6 hours, 2 x batteries | >10 years |

(1) on natural objects (white wall, low target illumination <3K lx, moderate temperatures)


(2) on natural objects (white wall, high target illumination with 30K lx, full specified operating temperature range)

(3) for tiltmeter full specifications refer to "wireless tiltmeter" specifications

(4) based on mathematical models, considering South Europe environmental conditions, SF8, and measurements at maximum distance of 20m. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.



SOFTWARE SUITE

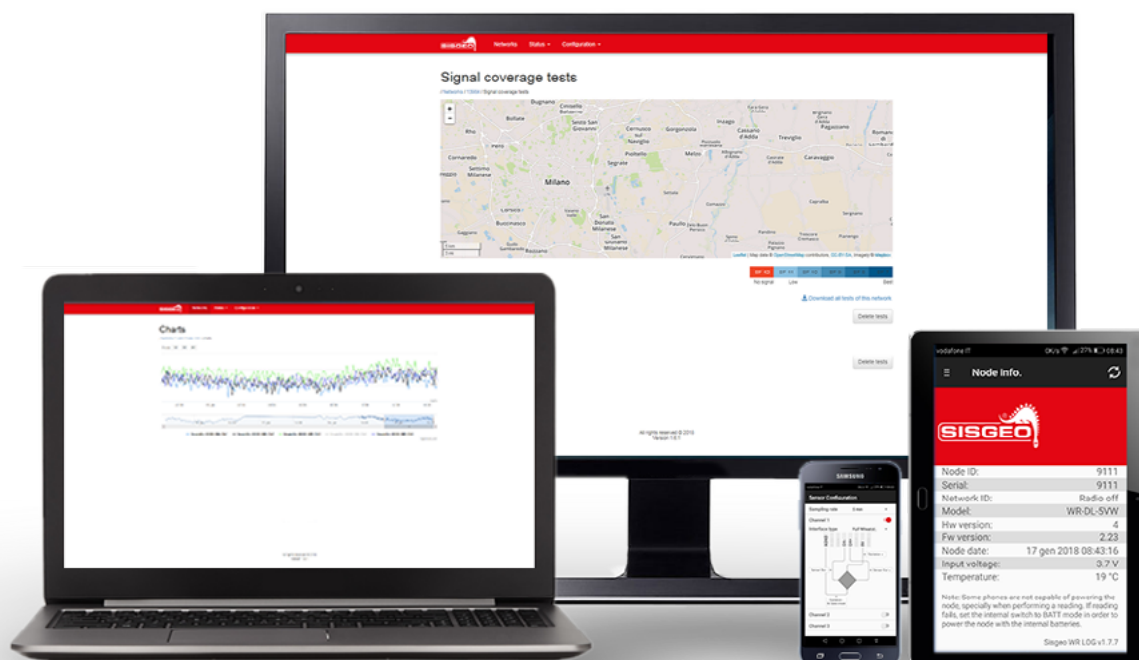

GATEWAY NETWORK AND ASSET MANAGEMENT SOFTWARE (ON BOARD WEB SERVER)

Network communications configuration and control

Wireless data unit and sensor attributes display

Wireless data unit configuration

Sensor data in near real time

Conversion of raw sensor data in engineering units

Manual and automatic data download in .csv

Data transmitted in a secure manner

Remote change of sensor's sampling rate

Data accessible through Modbus TCP

Able to push data on user FTP

WR LOG CONFIGURATION APP FOR NODES

Simple and fast connection to wireless node by USB-OTG cable

Runs on most Android devices supporting standard OTG USB cable

Easy sensor configuration: ID, sampling rate, frequency sweep, interface type, etc.

Checks radio signal coverage


Records coordinates (GPS)

Downloads data from wireless node and sends by e-mail or saves it on the Android device


Takes current reading

Updates wireless node firmware


TYPICAL SYSTEM ARCHITECTURE

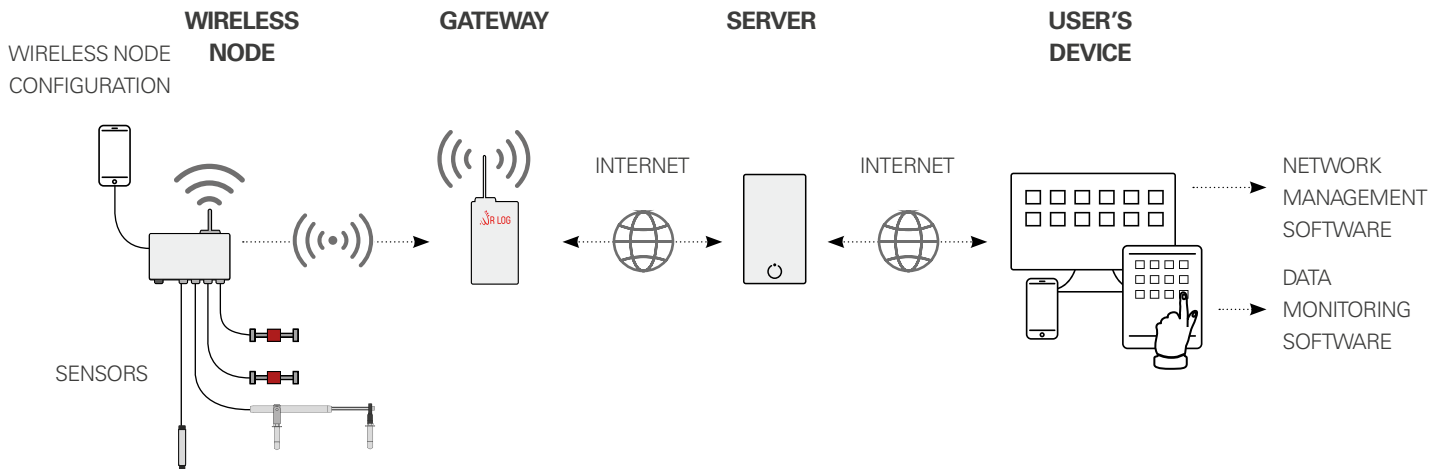


EXAMPLE OF CITY APPLICATION

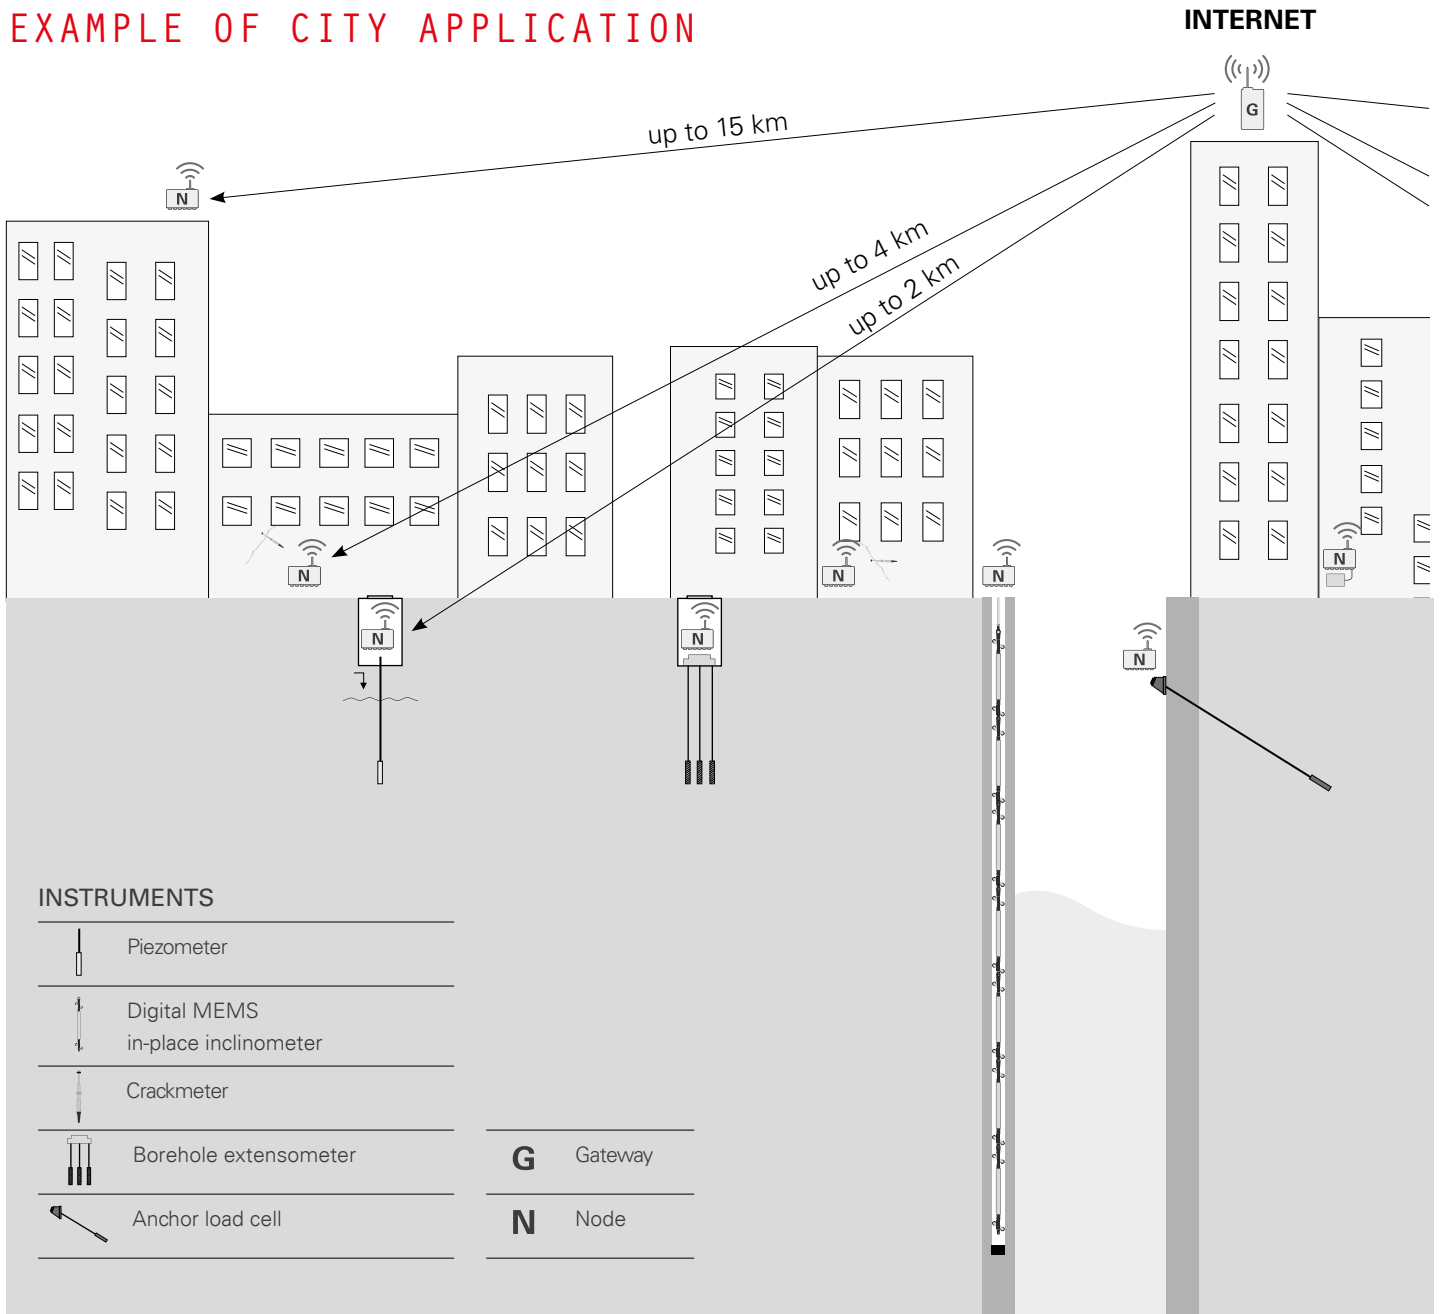


EXAMPLE OF MINES APPLICATION

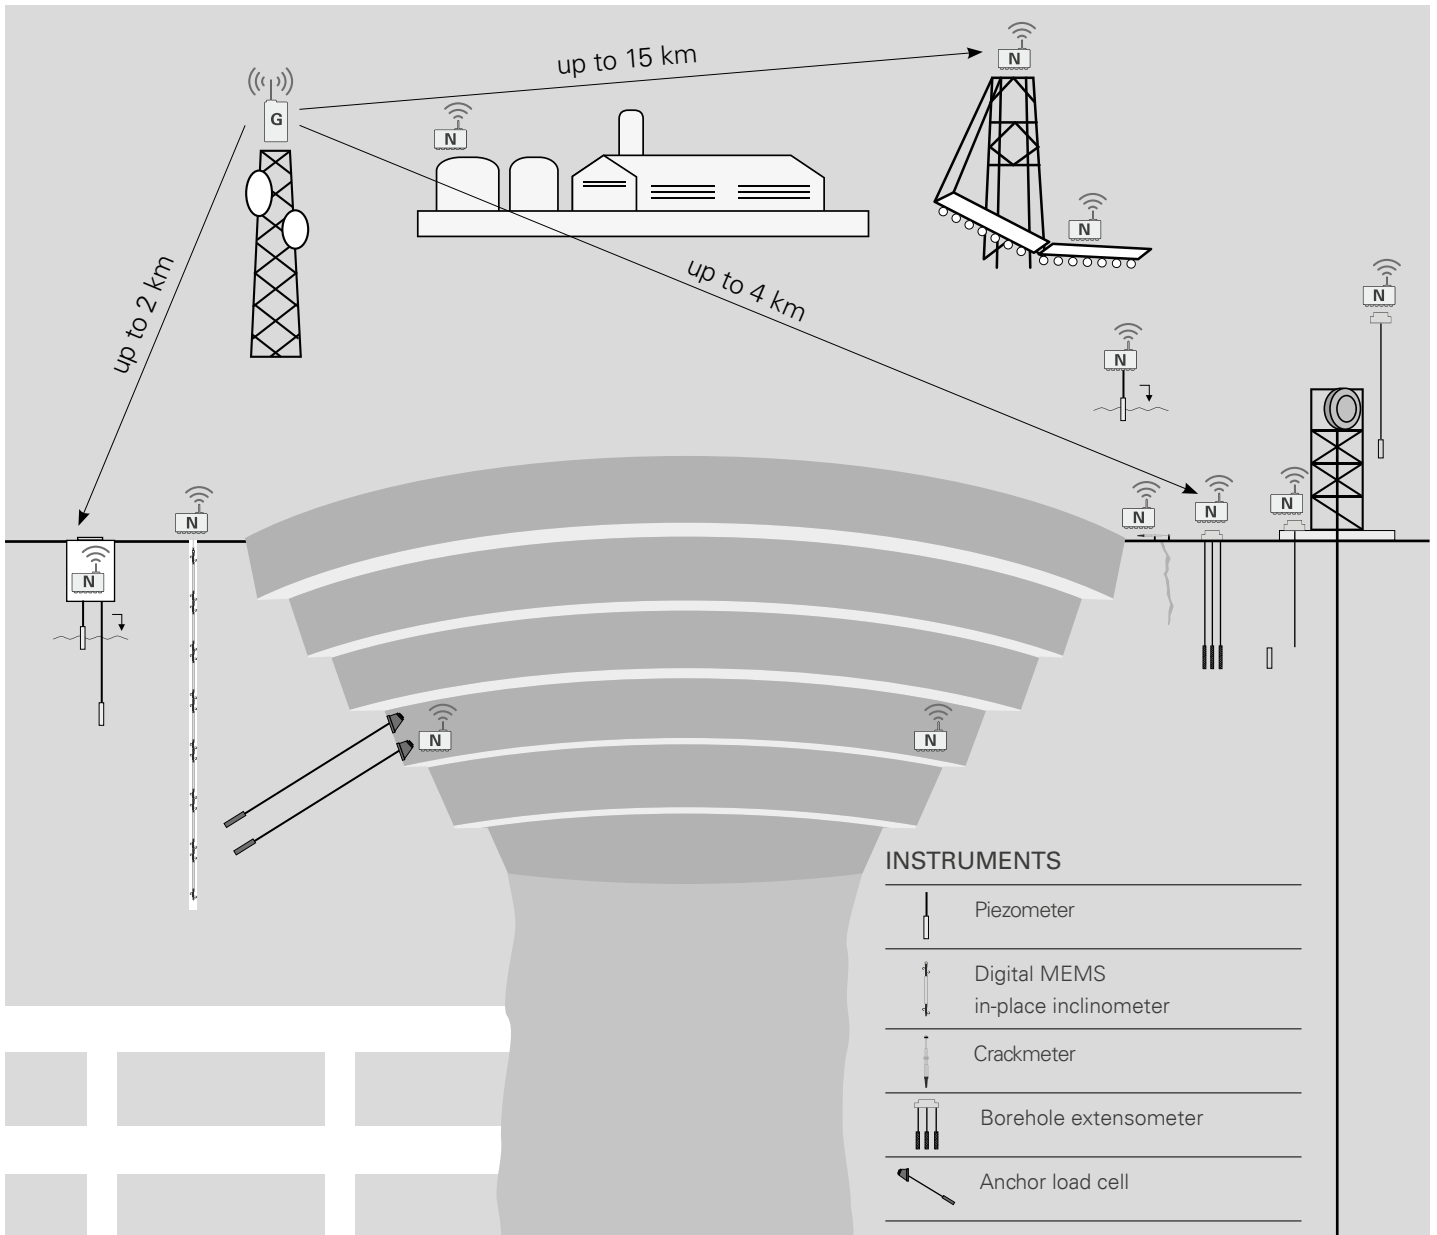


EXAMPLE OF TUNNEL APPLICATION

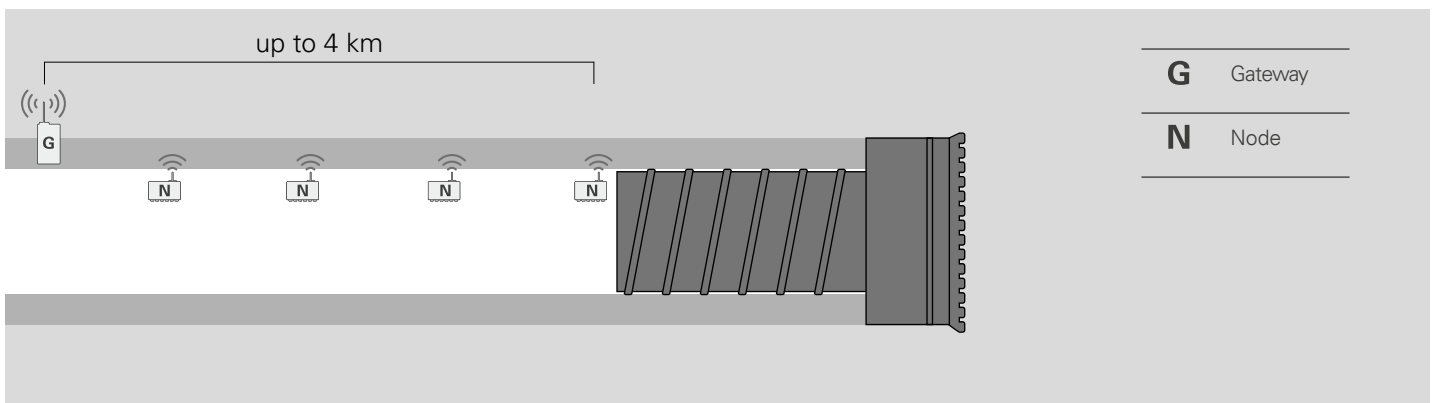

EXAMPLE OF DAM APPLICATION

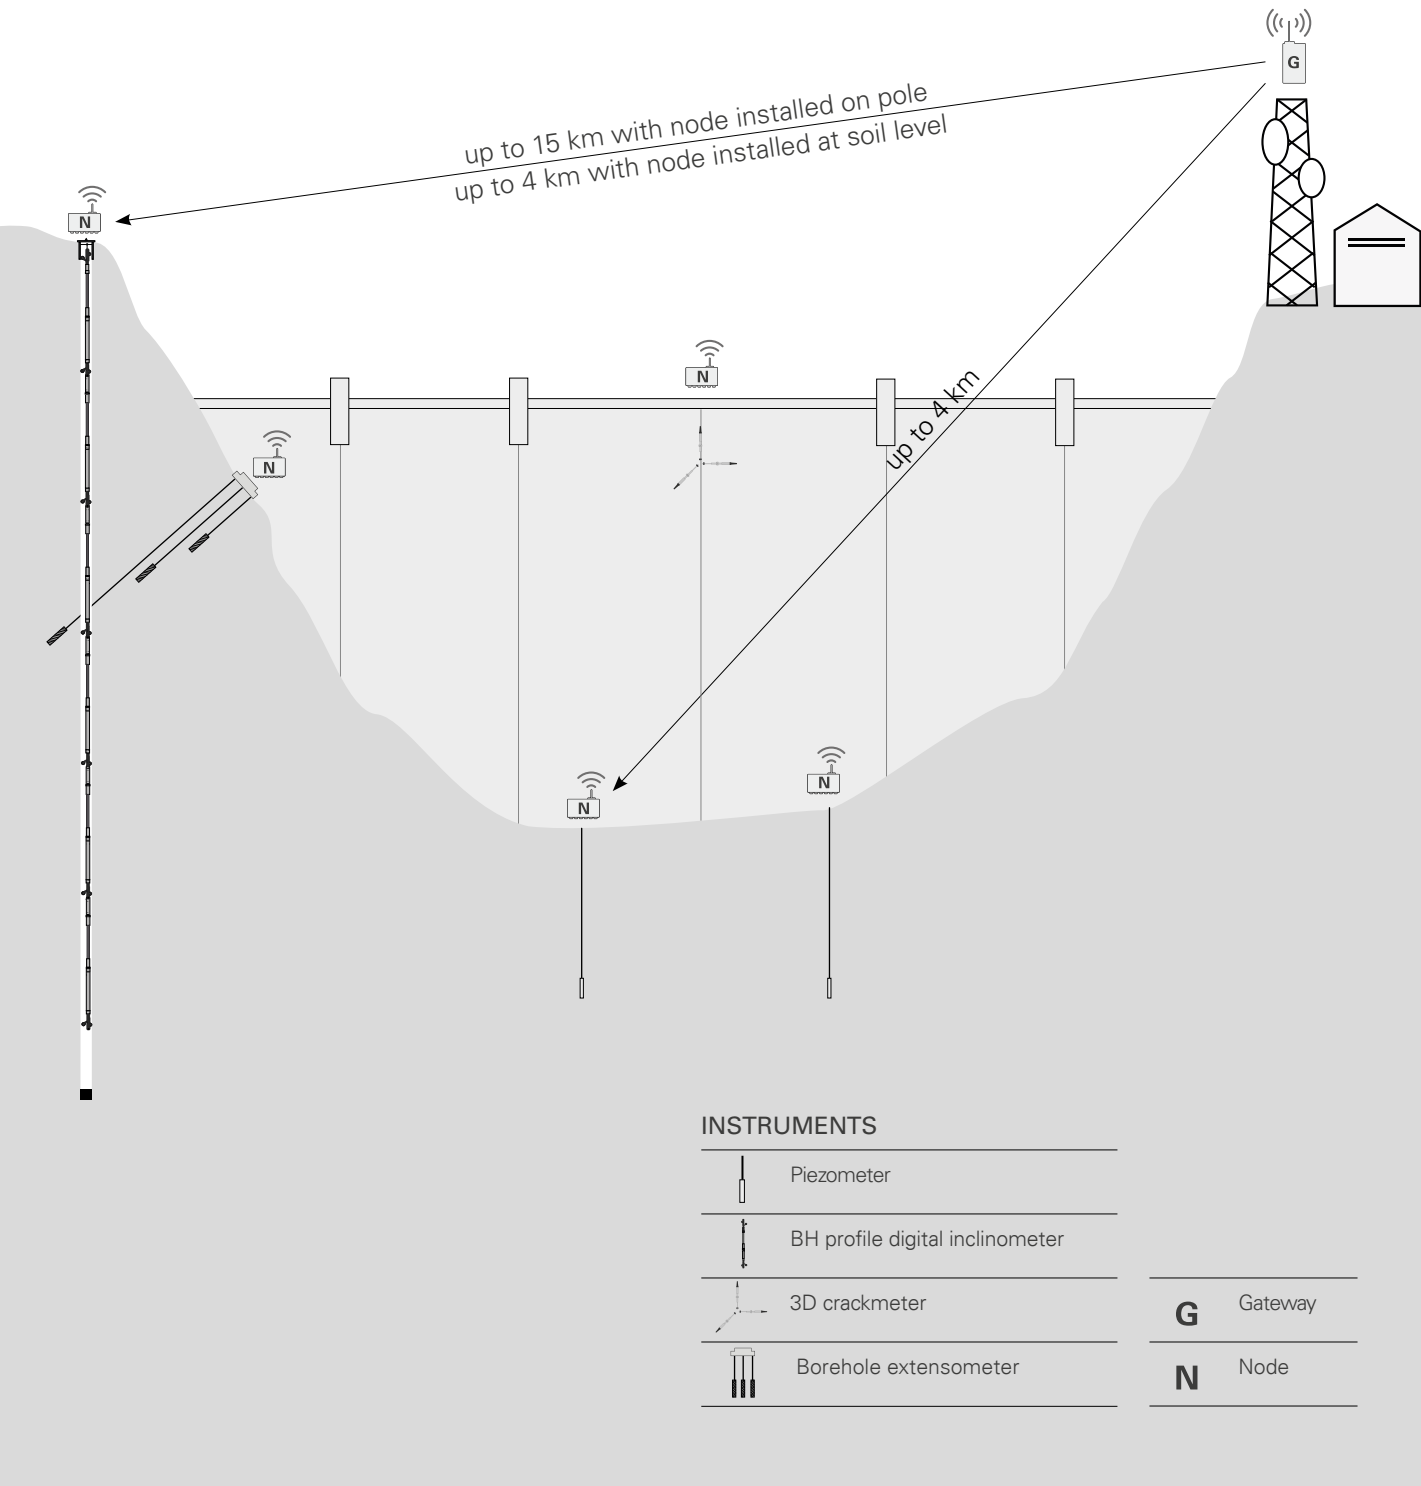

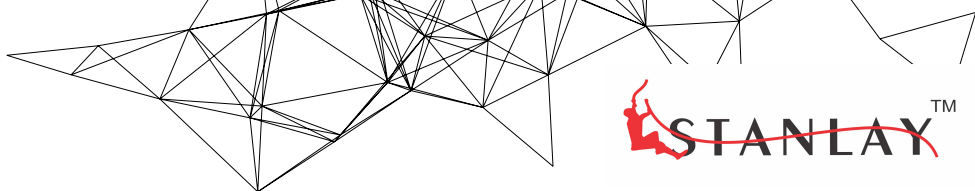

ACCESSORIES AND SPARE PARTS

C-SIZE BATTERY FOR NODES OLSWROBATT

3.6 V lithium-thionyl chloride high power C-size spiral cell for nodes power supply.
Minimum pulse capability: 2000mA.
Minimum continuous current: 1000mA.
Minimum capacity: 6.0Ah.

POLE MOUNTING BRACKET FOR NODES OLSACPOLPL8

Plate for pole mounting of nodes. It includes U-bolts and nuts for Ø 50 mm poles.

WALL MOUNTING BRACKETS FOR NODES OLSACCMWALL

Suitable for all nodes model, except for Mininode. Composed by 2 mounting Brackets, aluminium made.

WALL MOUNTING BRACKETS FOR MININODE OLSPLAMWALL

Suitable for Mininode only. Composed by 4 mounting Brackets, plastic made.

VERTICAL MOUNTING PLATE FOR WIRELESS TILTMETER OLSACCINCVPO

L shaped plate for wireless tiltmeter to be installed on vertical walls.
Overall dimensions: 120x102x50 mm, thickness 10 mm.

HORIZ. MOUNT. PLATE FOR WIRELESS TILTMETER OLSACCINCHPO

Plate for wireless tiltmeter to be installed on horizontal surface. Dimensions 130x102x5 mm.

POLE MOUNT. BRACKET FOR WIRELESS TILTMETER OLSACCINCPLO

Plate for pole mounting of wireless tiltmeters. It includes U-bolts and nuts for Ø 50 mm poles.

VERT. MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASVPO

Adjustable mounting plate for vertical surface. Anchor bolts not included.

GATEWAY LIGHTENING PROTECTION FOR ETHERNET OLSACCPRETH

Indoor Ethernet surge protection. Transient protection circuit based on high energy gas discharge tubes and a network of fast response silicon avalanche diodes (SAD).

GATEWAY LIGHTENING PROTECTION FOR ANTENNA OLSACCPRANT

RF coaxial surge protection on radio link. P8AX09-6G-N/ MF series from CITEL.

SWIVEL MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASSWI

Swivel mounting bracket. For a wall or a convergence bolt with 3/8". Anchor bolts not included.

SOLAR PANEL KIT FOR DIGITAL NODE OAX10W003AH

It is composed by a 10W solar panel with 10m cable and a plastic box housing the 2.3 Ah battery and charge controller. The IP67 box will house also the digital sensor kit (not included).

DIGITAL SENSOR KIT FOR DIGITAL NODE O0MX24V030W

Electronic boards for powering and wire 1 chain of digital instruments. To be used with solar power kit. For the maximum number of digital instrument of the chain please refer to the dedicated table.

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.
We reserve the right to change our products and specifications without prior notice. The datasheet is issued in English and other languages.
In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

| | OMNIALOG GT-2400 | OMNIALOG GT-100D |
|---|---|------------------|
| Temperature drift | < 10 ppm / °C, range -30°C to +70°C | - |
| Input noise voltage | 5,42 µVpp | - |
| Input limits | ±12V | - |
| Sustained input voltage w/o damage | ±50V DC max | - |
| DC common mode rejection | >105dB | - |
| Normal mode rejection | >90dB | - |
| Input impedance | 20 MΩ typical | - |
| OUTPUT | | |
| Digital output | One relay output (for alarm, etc.): volt-free closure (low voltage 30V, 2A) | |
| DIGITAL INPUTS | | |
| Measurement rate (MR) | Max frequency 1kHz | |
| Accuracy | 0.1 Hz | |
| PROTECTIONS | <p>Electro-mechanical relays for each measuring channel:</p> <p>Electrical endurance: min. 2x10⁵ operations,</p> <p>Mechanical endurance: 10x10⁸ operations.</p> <p>Circuit protection: Gas Discharge Tubes (GDT):</p> <p>DC Breakdown Voltage 75V (± 20%@100V/µs)</p> <p>Impulse Breakdown Voltage 250V (@100V/µs) typical</p> <p>Overvoltage and reverse polarity protection on power supply input.</p> <p>Short circuit protection on every outputs of sensor power supply.</p> | |
| SYSTEM POWER REQUIREMENTS | | |
| Voltage (external power supply) | 10 to 30 V DC (reverse polarity protected), max 5 A | |
| External rechargeable batteries | 12V DC nominal | |
| Typical current drain (@12Vdc, external power supply) | <p>Sleep mode: 100 µA</p> <p>ON: 62 mA - ON with ethernet connected: 87 mA - ON with display ON: 115 mA</p> <p>ON with display ON and ethernet connected: 142 mA</p> <p>Analog initialisation: 115 mA</p> <p>Measurement: 123 mA (with 12 mA @ 24 V sensor consumption)</p> | |
| ENVIROMENTAL CONDITIONS | | |
| Operating temperature | -30 to +70°C (display -20 to +70°C) | |
| Storage temperature | -40 to +85°C (display -30 to +80°C) | |
| Humidity | 80% | |
| Overvoltage category | II | |
| Pollution degree | 2 | |
| Sound levels | < 74dBA | |
| Maximum height of use | 3000m | |

OMNIALOG GT-2400

OMNIALOG GT-100D

SOFTWARE & FIRMWARE

Web server on board (independent OS platform).

Live update (firmware and web pages).

FTP client to send data/alarms on a FTP server (SFTP not supported)

MAIL to sent data/alarms to max 5 email address (SMTPS / SSL not supported)

SMS to sent alarms to max 5 telephone numbers

Data download (readings, logs) in .csv file (compatible with Microsoft Excel)

Virtual channels management (max No.80 channels)

Languages: Italian, English and French

PHYSICAL CHARACTERISTICS

Dimensions (L x W x H)

183 x 144 x 118 mm

183 x 144 x 76 mm

Weight

1500 grams

1000 grams

Material

Plastic and metal



Plastic and metal

Wiring



Removable connector

Removable connector

TOP VIEW



FRONT VIEW



OMNIALOG GT-2400

OMNIALOG GT-100D

| | | | | | |
|---|-------------------|---|---------|---|-------------------|
| 1 | Membrane keyboard | 4 | USB | 7 | "V" IN |
| 2 | RS-232 | 5 | "V" OUT | 8 | PWR input |
| 3 | LAN | 6 | RS-485 | 9 | Analogical inputs |

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.

The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages.

For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument.

The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.