





The advanced GPR solution for an easy on site utility detection



SEE MORE. REACH DEEPER. BASED ON "EST" TECHNOLOGY GPR

OPERA XR IS THE LATEST 2025 UTILITY GPR, PROVIDING POSSIBLY
THE **HIGHEST DEPTH PENETRATION AND RESOLUTION**, IN ITS CLASS
BASED ON DUAL FREQUENCY 200/900 MHz ANTENNA & EST TECHNOLOGY.







The advanced GPR solution for an easy on site utility detection



Opera XR is a compact, easy to transport and deploy ground penetrating radar for fast and accurate Underground non metallic & metallic buried utility on site asset detection; featuring the new radical Equalized scrambled Technology- EsT by IDS GeoRadar, Opera XR takes underground utility detection to the next level: deeper and clearer, than any other product on the market.





EsT | Equalized scrambled Technology: a new depth in utility detection.

Thanks to patented EsT technology, Opera XR delivers an unparalleled detecting performance providing the best data quality and increasing penetration depth by 40% to 60% compared to traditional devices.


This technology is able to exploit the entire radiating performance of the antenna for full control of the GPR signal, Opera XR provides users with an accurate detection of underground utilities and optimal data quality with the noise rejection for their peace of mind.

Quick Scan











Traditional GPR depth penetration



Opera XR Go Deeper depth penetration

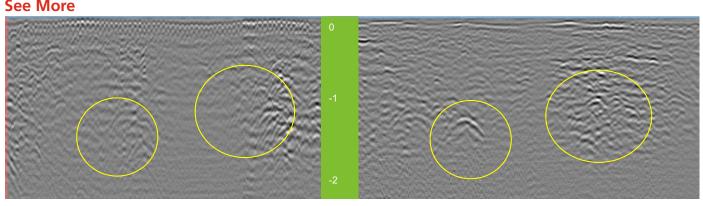

HH Config



DESIGNED FOR FLEXIBILITY: COMPACT, LIGHT AND CUSTOMISABLE

Opera XR allows effortless data collection with its lightweight 20 kg, modular and compact design. The dual-frequency antenna mounting system is height-adjustable and offers an easy polarization switch (HH and VV) Handlebar is foldable for easy deployment and the device can be easily maneuvered and transported by a single operator.



PREMIUM ON-SITE PERFORMANCE SEE MORE, BETTER AND DEEPER

Opera XR boasts unmatched resolution and extraordinary depth investigation detecting hidden utilities more clearly at both shallow and deeper levels. The "Quick Scan" mode helps streamline field operations with an intuitive and easy detection of the underground pipe network: from real time making and digitalization of detected anomalies to quick on-site reporting.

VV Config



GREATER EFFICIENCY FOR

ON SITE TARGET MANAGEMENT AND REPORTING

Once connected to the tablet, uMap Logger automatically configures the Opera XR. The user simply connects the LAN cable, launches the software, and can immediately begin data collection - no additional steps required. Quick Scan Mode optimizes field operations, saving time and reducing costs.







The advanced GPR solution for an easy on site utility detection



A. Open configuration for usage: 750x625x1000 mm (30x25x40 in)


B. Folded configuration for easy transportation and storage: 750x625x420 mm (30x25x17 in)

No- limit to data collection and easy management.

Opera XR employs the latest software technology solutions for data collection and post processing: uMap and IQMaps.

The on-field software uMap, allows for faster collection and improved management of data with an easy-to-use interface that even unskilled users can comfartably manage.

IQMaps (Optional) is IDS GeoRadar's post-processing software application for the advanced analysis of GPR data, enabling fast interfacing between the user and GPR data itself.

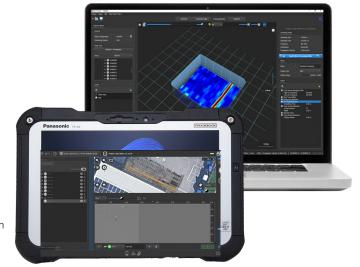







The advanced GPR solution for an easy on site utility detection



Features	Specifications
No of channels	2
Central Frequencies	Dual 200 Mhz and 900 Mhz
Inspection Range	80 MHz-1500 Mhz
Technology	EsT-Equalized scrambled technolgy (Patented technology)
Dimension (Folded for Transport)	750x625x420 mm 30x25x17 in
Dimensions (in use)	750x625x1000 mm 30x25x40 in
Weight	20kg 44 lbs
Operating Temprature	-20° C to +50° C -4° F to 122° F IEC 60068 2-1/2
Vibration	Complaint with IEC 60068-2-64:2012
Shock	Complaint with IEC 60068-2-31:2011
Certification	CE,UKCA,FCC,IC
Polarization	Configuration : HH and W
Positioning	Encoder, external GPS and TPS
Power Consumption	Acquistion: 16W Stand-by: 12W
Operating Time	4 h with #1 battery 8 h with #2 battery
	Operating time can be extended by hot swap capability
Wheels	4xØ310 mm (default) 4xØ380 mm (optional)
	4xØ12 in (default) 4xØ15 in (optional)
Environmental	IP65
Software Specifications	
uMap Data collection software (Included)	Automatic calibration for an easy and quick start-up Visulization and storage of radar data Real-time visualization of radar tomography (time slices) Import of cartography of the surveyed area from different sources for visualising geo-referenced underground asset position in real time. Connection with NMEA positioning device Multilanguage support Metric and Imperial units Export, store, share and access data on major cloud service providers for a streamlined workflow in utility detection on site target marking automatic report generation
IQMaps Processing Software (Optional)	Advanced 3D processing software with a direct export link to AutoCAD export, store, share and access data on major cloud service providers for a streamlined workflow in utility detection
Recommended Tablet (Ruggedized PC)	Panasonic FZ-G2/GETAC S410







Contact Nos.: Tel: +91-11-41860000 (100 Lines), Direct Sales Helpline: +91-11-41406926

Web: www.stanlay.in www.stanlay.com email: sales@stanlay.com





