



STAN ONE® Series

SVTS950-9.5mm-5 Meter Probe

**360 DEGREE ROTATING PROBE BORESCOPE WITH
DUAL FRONT & SIDE INSPECTION CAMERA**



5-Inch
LCD Screen



IP67
Waterproof



3500mAh
Lithium-Ion Battery

**WITH *BIGGER SCREEN*
COMES CLEARER INSPECTION DETAIL**

SVTS950

STAN ONE®

360° CONTROLLED ROTATION ROTATING PROBE BORESCOPE + DUAL FRONT & SIDE CAMERA



360° Rotation



Probe Rotation Control

Press for anti-clockwise rotation.
Press for clockwise rotation.

Press for switching between Front View or Side View Camera

INDUSTRIAL ENDOSCOPE CAMERA

2-Way Rotation with left – right (clockwise or anti clockwise) rotating control & with front and side camera viewing.

SVTS950

9.5MM-5M-DL

STAN ONE®

MINI TABLET-STYLE, PROFESSIONAL, 5-INCH, INSPECTION CAMERA



Explore tight spaces confidently with the **SVTS950 Dual-Lens Inspection Camera** featuring a **5" screen**. This comprehensive system comprises an endoscope camera equipped with **front and side camera lenses**, both with integrated **LEDs**, alongside a convenient **5" monitor with a handheld grip**. Designed to view even the areas with left – right (clockwise or anti clockwise) **motorized 360 degree rotating control** & with front and side camera viewing, it's ideal for a myriad of tasks including plumbing, equipment inspection and automotive inspections.

The probe is a slim 9.5mm diameter, allowing use in small pipes and confined spaces, further enhanced by its **IP67 waterproof rating**. The 5" display, fortified with durable tempered glass, affords clear visualization of the probe's perspective. Mounted on a handgrip, the monitor enables real-time viewing of the inspection process. With a **32GB micro SD card** included, you can effortlessly record for comprehensive documentation.

Conveniently equipped with an **LED flashlight** on the handgrip, the SVTS950 illuminates dark environments, facilitating seamless operation. The **built-in 3500mAh battery** ensures extended usage, providing up to 4.5 hours of continuous runtime, guaranteeing uninterrupted inspection sessions.

SVTS950



Monitor Features

5.0" IPS Screen With 1280x720 Resolution

3 Times Clearer than other 5.0"

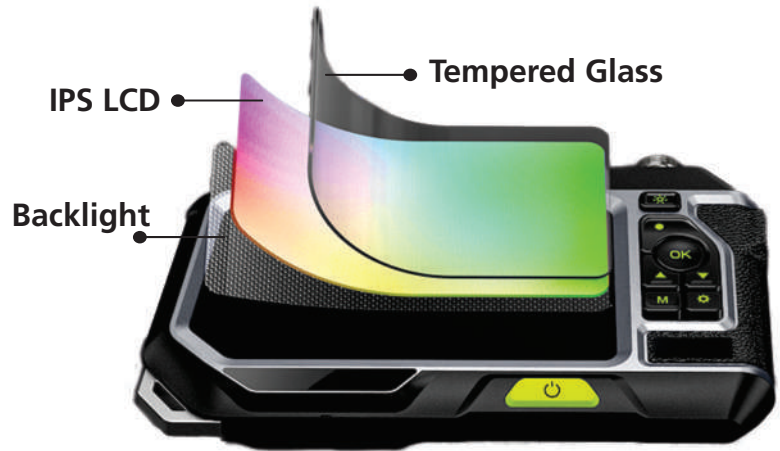


PHOTO AND VIDEO

- 5.0-inch Colour IPS Display
- 2 million High Definition Pixel
- Tempered Glass Screen Is Scratch Resistant



- 360° Image Rotation
- Mirroring Rotation



Memory Card 32GB
100000+ Images
50+ Video



IP67 Waterproof



Replaceable
Different Cable




LED FlashLight
Illuminates the
Darkest Areas



- 3500mAh Battery
- 5 Hours Working Time



Drop Resistant

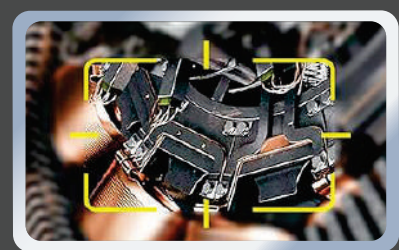


Auto Focus

SVTS950



DUAL-LENS FLEXIBLE INSPECTION CAMERA PROBES

Flexible with Copper Wire

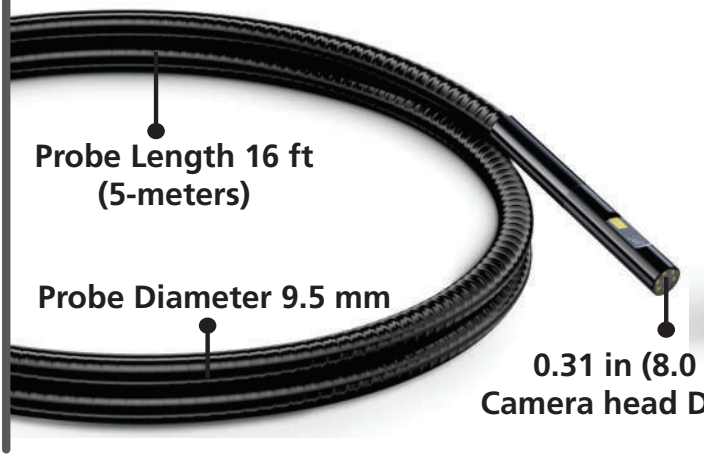


Probe Length 16 ft
(5-meters)

Probe Diameter 9.5 mm

0.31 in (8.0 mm)
Camera head Diameter

Anti-Flare Glass, 99.99%
Transmittance





Front-View Camera

Side-View Camera


Upgraded
Waterproof
Gooseneck
Cable

1080P Dual-Camera Probe
Get Different Field Of View

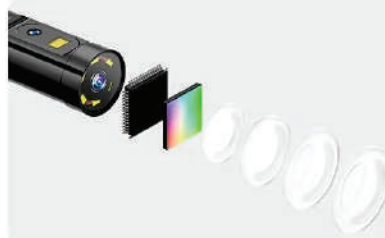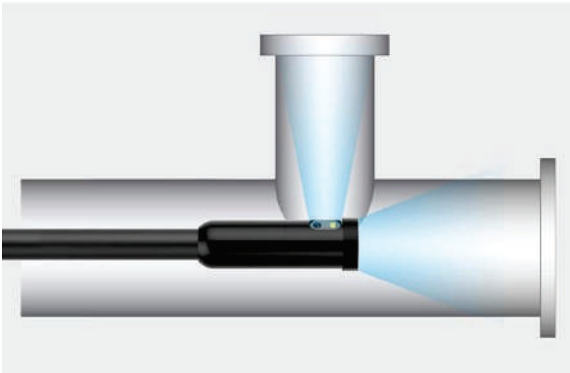

Front-View Camera

- Focal Distance 30-80mm
- 70° View Angle
- 6 rings LEDs
- 2.0 megapixel HD

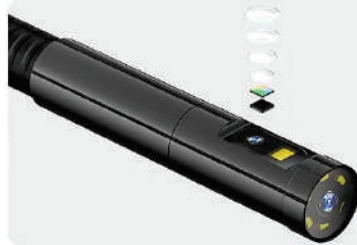

Side-View Camera

- Focal Distance 20-50mm
- 70° View Angle
- 2.0 megapixel HD
- LED light illumination

6 Adjustable LED Lights



360° TWO WAY ROTATION
All-Around Angles of view

IP67 WATERPROOF
Probe & Camera



SVTS950



Specification


Monitor	
Screen	5-inch IPS HD Display
Screen Resolution	1280x720 Pixels
Image Capturing Resolution	1920x1080 Pixels
Video Recording Resolution	1280x720 Pixels
Storage	32GB Micro SD Card
Ports	Type-C charging port / TF Memory Card Slot
Power Source	3500mAh lithium Battery
Battery Life	5-6 Hours
Operating temperature	0° to 45°C
Language	English
Probe & Camera	
Lens Type	Dual Lens: Front-View + Side-View + 360° Viewing (Rotation)
Camera Head Diameter	8 mm
Probe Length	5 Meters /16 ft
Probe Diameter	9.5 mm
Megapixel Camera	2.0 Megapixel
Viewing Angle (FOV)	70°
Probe Stiffness	Semi -Rigid
Straight-Viewing Camera	30 mm to 80 mm
Side-Viewing Camera	20 mm to 50 mm
LED Light	6 Adjustable High-Intensity LEDs
LED Adjustable Step	Off + 3 Step
Splash, Water, and Dust Resistant	Rated IP67 (maximum depth of 1 meter up to 30 minutes) Under IEC Standard 60529



SVTS950



Multiple Application

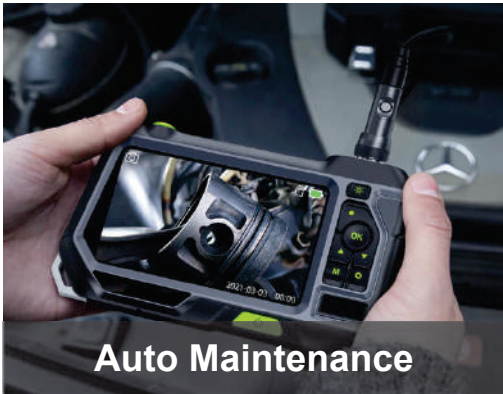

Auto Maintenance



Building Inspection



Air-Condition Inspection



Appliance Inspection



Mechanical Inspection





 STANLAY[™]

**Professional
Grade
Products**

 STANLAY[™]

**Best In Class
Warranty
Programmes**

 STANLAY[™]

**Product &
Service
Training**

Regd. Office:
Asian Contec Ltd.
Asian Centre, B-28, Okhla Industrial Area, Phase-1,
New Delhi -110020, India.

Contact Nos.:
Tel : +91-11-41860000 (100 Lines),
Direct Sales Helpline : +91-11-41406926
Web : www.stanlay.in www.stanlay.com
email: sales@stanlay.com

Works :
Asian Contec Ltd. 13/7,
Mathura road, Faridabad, Haryana, India

Regional Offices :
• Mumbai • Bengaluru • Hyderabad • Vadodara
• Lucknow • Patna • Bhubaneshwar • Guwahati

Sales Channel Locations: • Chennai

Ref: STVS950/24/1

www.stanlay.in

**Quality
Management
System**

ISO 9001: 2015

1-QSC202101102



IAS