


Single Fiber Protection Sleeve



TK-15

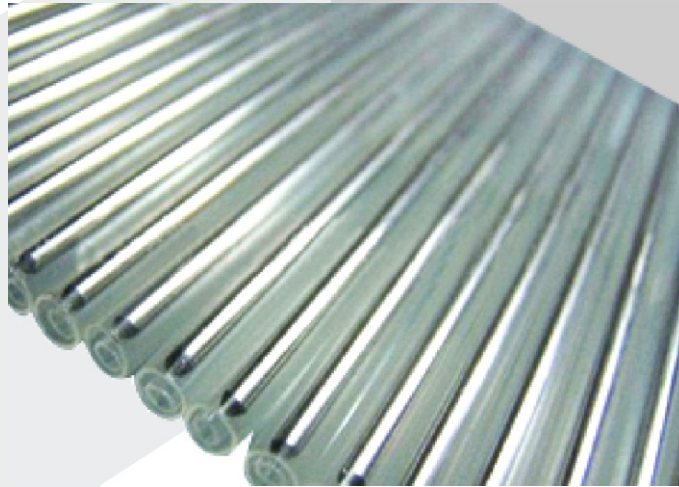

Spliced bare Optic Fibers are susceptible to breakage . Using the Single Fiber Protection Sleeve TK-15 protects the fiber from stress and breakage . Fiber protection sleeves are provided in 60mm or 40mm length. Fiber protection sleeves offered have a heat shrinkable outer coating made of polyethylene , built in stainless steel rod for rigidity. using a fiber protection sleeve after the fusion splicing protects bare fiber joint from dust, humidity - providing strength & protection to the fiber joint. Fiber protection sleeves are offered in packs of 50 and 100.

Features:

- 60mm or 40mm length
- D1:3.55mm, D2:2.25mm, D3:1.5mm
- Used for single fiber
- Stainless steel inside
- Minimum heating temperature: 120° C



Asian Contec Ltd.

Asian Center, B-28, Okhla Industrial Area, Phase-1, New Delhi -110020, India.

Contact Nos. : Tel : +91-11-41860000 (100 Lines), Direct Sales Helpline : +91-11-41406926

Web : www.stanlay.in www.stanlay.com email: sales@stanlay.com

Regional Offices : • Faridabad • Lucknow • Mumbai • Ahmedabad • Bengaluru • Hyderabad • Bhubaneshwar • Guwahati

