



— **V-NOTCH**
FLOW METERS

HYDROLOGICAL
INSTRUMENTS

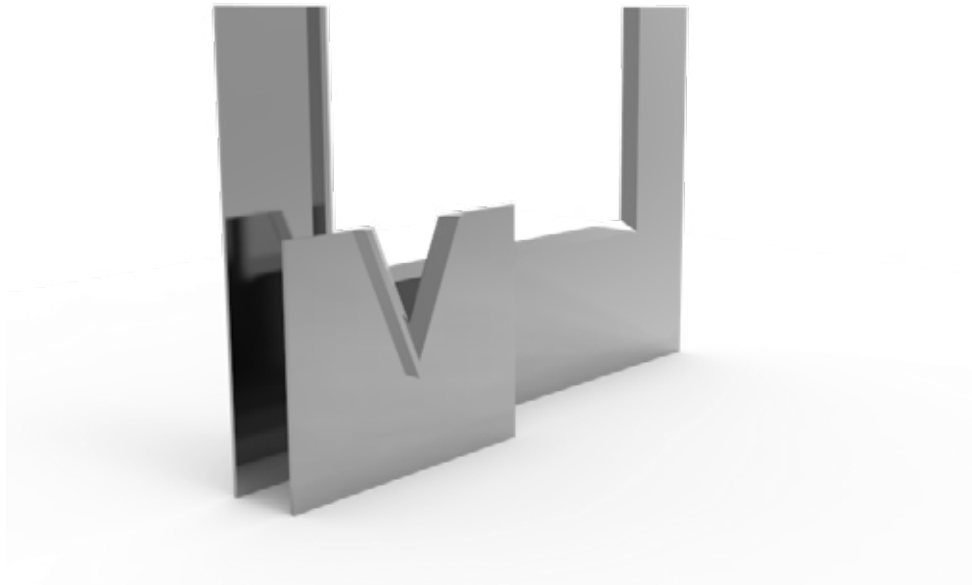

V - NOTCH FLOW METERS

Water flow monitoring in open channels is widely employed in environmental and geotechnical field.

Leakage measurement is one of the most important indicator of the overall performance of earth/rock-fill and concrete dams.

The leakage rate is a function of the water level in the reservoir and depends either from the construction than the behaviour of the dam. Consequently, leakage monitoring provides data for the evaluation of the long term stability of the dam constructions.

Leakage water is usually impounded downstream of the dam and diverted to a basin in a weir-station.

APPLICATIONS

- Leakage measurement in concrete and earth dam
- Open channels flow rate
- Drainage systems in tunnels and excavations

FEATURES

- Suitable for both manual reading and remote monitoring
- Available both triangular and rectangular notch plate
- Utilize high accuracy transducer
- Easy to automate with OMNIAlog logger family



Meet the essential requirements of the EMC Directive 2014/30/UE

NOTCHED WEIRS

The weirs are sharp crested stainless steel plates with a specially shaped opening (or notch). They should be installed in open canals in order to measure the instant flooding.

	MODEL 0QV45LS1000	MODEL 0QV60LS2000
Flow working range	0.5 to 10 l / sec	0.7 to 20 l / sec
Notch shape	triangular, 45°	triangular, 60°
V-notch dimension (WxH)	195x235 mm	288x250 mm
Plate dimension (WxH)	490x600 mm	721x700 mm
Thickness	5 mm	5 mm
Material	AISI 304 stainless steel	AISI 304 stainless steel


	MODEL 0QV90LS5060	MODEL 0QU90LS5000
Flow working range	1.2 to 50 l / sec	9 to 50 l / sec
Notch shape	triangular, 90°	rectangular
V-notch dimension (WxH)	600x300 mm	350x200 mm
Plate dimension (WxH)	1000x700 mm	540x450 mm
Thickness	6 mm	5 mm
Material	AISI 304 stainless steel	AISI 304 stainless steel

STAFF GAUGES

Water level variations in the stilling basin could be manually carried out by means of a stainless steel staff gauge with millimeter graduation.

	MODEL 0QVHI030000
Length	300 mm
Width	40 mm
Material	AISI 304 stainless steel

	MODEL 0QVHI050000
Length	500 mm
Width	40 mm
Material	AISI 304 stainless steel

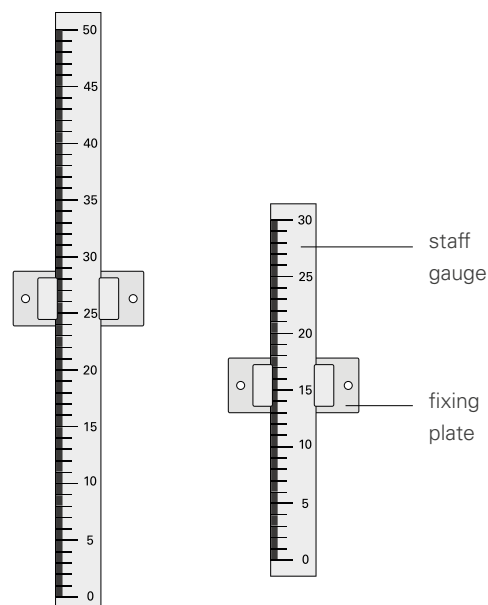

WATER LEVEL TRANSDUCER

The water level transducer model 0QVML000EX consists of a relative pressure transducer connected with 2m vented cable to a junction box containing a 3-levels overvoltage protections. The system can be connected through an extension cable to a datalogger for automatic data management and alerting.

MODEL 0QVML000EX



Sensor type	ceramic capacitive pressure transducer
Measuring range	500 mm or 1000 mm of water column
Total accuracy (lineary + hysteresis + repeatability)	< ±0.2% FS
Proof pressure	1.2 bar (about 12000 mm water column)
Burst pressure	2.4 bar (about 24000 mm water column)
Operating temperature range	-20°C + 80°C
Output signal	4-20 mA (current loop)
Power supply	15-24 V DC
Dimensions	
- pressure transducer	210 mm, OD 48,3 mm
- junction box (LxWxH)	110 x 80 x 65 mm
Materials	
- pressure transducer	stainless steel
- junction box	ABS

ACCESSORIES AND SPARE PARTS

PRESSURE TRANSDUCER 0P252Q00000

Relative pressure transducer available with 0.5 and 1.0 m H₂O full scale (spare).

JUNCTION BOX WITH OVP 0EDP002W000


Vented junction box with 3-levels overvoltage protections (OVP), suitable for 2-wires instruments (spare).

2-WIRES VENTED SIGNAL CABLE 0WE203KE0ZH

2-wires 20 AWG signal cable with vented tube for barometric compensation. Flame retardant polyolefin inner jacket and LSZH M1 technopolymer external jacket.

EXTENSION SIGNAL CABLES 0WE102KE0ZH

2-wires 20 AWG signal cable with flame retardant polyolefin inner jacket and LSZH M1 technopolymer external jacket.

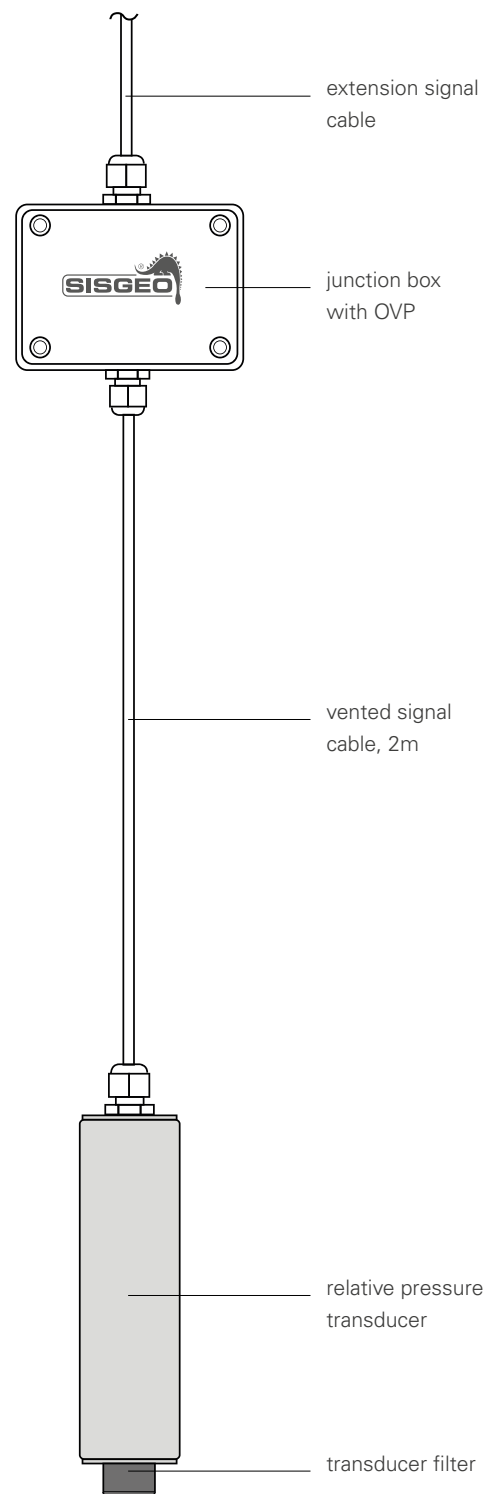


OPERATING PRINCIPLE





Notched weirs operate on the principle that an obstruction in a canal will cause an hydraulic jump, creating a high level behind the barrier with a typical low water current (no turbulent motion). The purpose of the notched weir is to transform the water level in the upstream basin into instantaneous flow values of the canal where the weir is installed. To allow this, a specific formula is used: it considers that the flow rate is function of the notch shape and proportional to the water depth "H", called head.

For reliable measurements, the following conditions must be verified:

- the canal upstream will have a fair slope (1-3%) and rectangular section for a length of at least 10L (where L=width of canal);
- the measuring point of the water head "H" will be at a minimum distance of about 4H from the weir;
- be sure the air under the water which floods immediately after the weir, will be in contact with the barometric pressure (do not create a closed chamber);
- the possibility of solid materials being drawn by the current and deposited upstream of the measuring equipment will be kept in mind. Accumulated sediments may affect the reliability of measurements, so that sediments should be cleared regularly;
- water will be carried away from the weir in the downstream in order to not interfere with the notch.

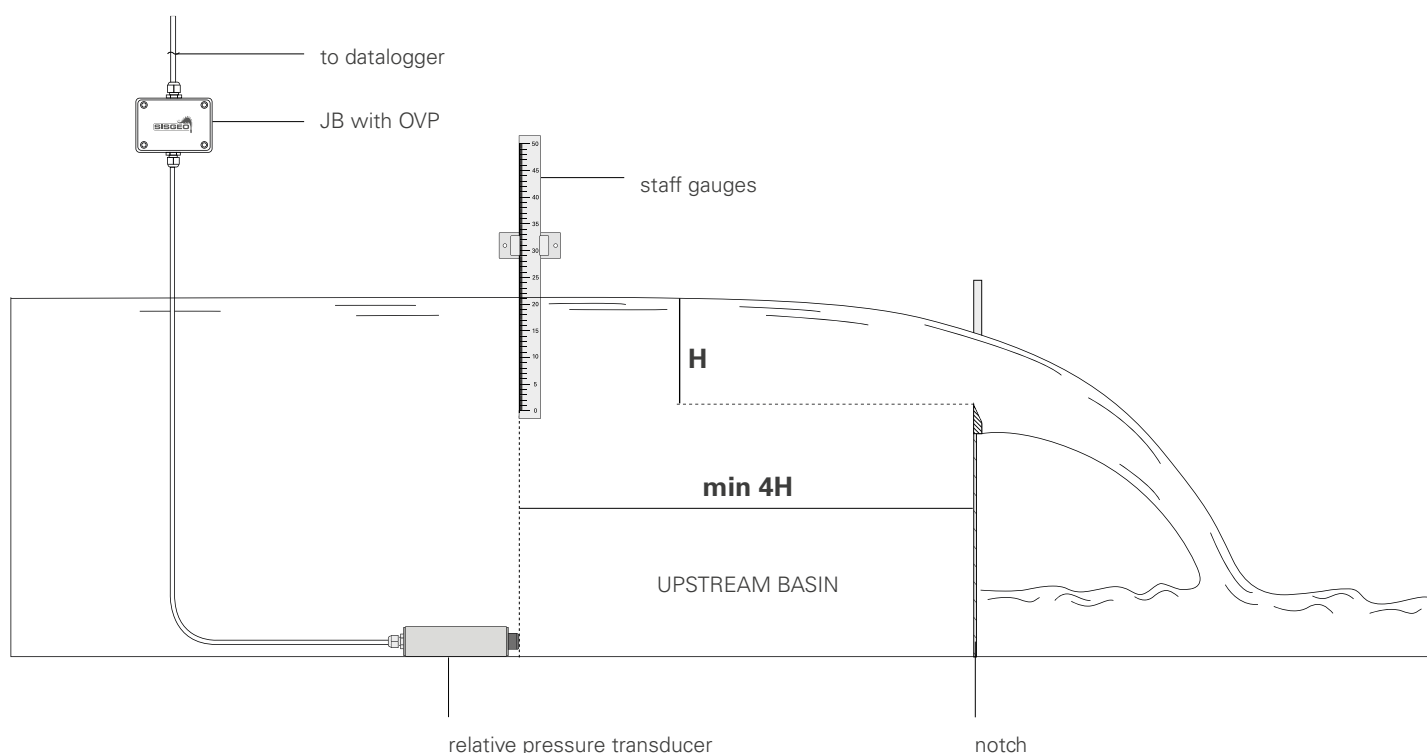

READABLE BY



For further information refer to their own datasheets

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.

The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages.

For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument.

The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.



CDL DATALOGGERS

READOUT UNITS
AND DATALOGGERS



CDL DATALOGGERS

CDL is a family line of durable, water resistant easy-to-use portable readout which includes Galileo and New Leonardo dataloggers.

They are equipped with an high performance microprocessor, Ni-MH batteries and color graphic display.

New Leonardo datalogger is compatible with all types of Sisgeo's sensors. Galileo is designed for use with vibrating wire instruments.

Multiple-readings through multiplexer box and switch measuring boxes are supported.

FEATURES

- Compatible with all sensors
- Large coloured display
- Accurate and precise measurements
- Splash-proof hand-held case
- Bluetooth module for smartphone connection

BENEFITS

- Lightweight and portable
- Reads both electrical and engineering units
- Auto shutdown
- Live up-date for firmware and software
- Sunlight reliable display



TECHNICAL SPECIFICATIONS

	DATALOGGER NEW LEONARDO (PRODUCT CODE 0CDL400N0000)	DATALOGGER GALILEO (PRODUCT CODE 0CDL100VW00)
Channels	2	2
A/D converter	2x24 bit with autocalibration (19 true bit)	2x24 bit with autocalibration (19 true bit)
Digital display	TFT graphic backlight LCD 320 x 240 pixel, 5.7", sunlight reliable	TFT graphic backlight LCD 320 x 240 pixel, 5.7", sunlight reliable
Type of measure	mA, mV, V, mV/V, Hz, μ sec, digit, μ ε, °C (PT100 and thermistors)	Hz, μ sec, digit, μ ε, °C (thermistors)
Measuring range	4-20 mA, ± 10 mV, ± 400 mV, ± 5 V, 1000 Ohm (PT-100) 10000 Ohm (thermistors), from 400 to 6000 Hz	10000 Ohm (thermistors) from 400 to 6000 Hz
Measurement resolution	1 μ A at FS 20 mA - 1 μ V at FS ± 10 mV 10 μ V at FS ± 400 mV - 100 μ V at FS ± 5 V 0.001 mV/V at FS 10 mV/V - 0.1°C at FS 1000 Ohm 0.1°C at FS 10000 Ohm - 0.1 Hz at FS 400-6000 Hz	0.1 Hz at FS 400-6000 Hz 0.1°C at FS 10000 Ohm
Measurement accuracy	0.01% FS (0.1% FS for PT100 and NTC)	0.01% FS (0.1% FS for NTC)
Thermal drift	0.001% FS / °C	0.001% FS / °C
Internal battery	12 V DC, 4500 mAh Ni-MH, with protections	12 V DC, 4500 mAh Ni-MH, with protections
Operating time	8 hours (always power-on)	8 hours (always power-on)
Battery charger	fast charge (2.5h), 100-240 V AC, 50-60 Hz, 35W	fast charge (2.5h), 100-240 V AC, 50-60 Hz, 35W
Sensor supply	Fully automated power supply selection	Fully automated power supply selection 100
Input impedance	> 10 MW for voltage <2.5V > 1 MW for voltage >2.5V	-
Maximum sensor output current	190 mA	100 mA
Temperature range	-20°C a +60°C	20°C +60°C
Storage memory	2 GB*	2 GB*
COMM port	USB 2.0, Bluetooth optional (0CDL0BTOOTH)	USB 2.0, Bluetooth optional (0CDL0BTOOTH)
Enclosure	ABS, IP67 protection	ABS, IP67 protection
Dimensions and weight	200 x 280 x 76 mm, 2 kg	200 x 280 x 76 mm, 2 kg



* Readings are stored in an internal SD card and the stored data can be fast and easily transmitted to a host PC by USB cable.

The storage memory of dataloggers works like an Hard Disk: data is organized in a "site"; in each site there are the installed instruments and for each instrument the Client can store and download data, sorted by date and time.

ITEMS INCLUDED

CARRYING CASE OCDLOBAG927

Carrying bag and red customized case for easy operation at site



CD-ROM

Smart Manager Suite package and user manual



SENSOR CABLE OECAV7P6A00

Jumper cable with 6 alligator clips



USB CABLE

PC communication cable

BATTERY CHARGER OECAB12VNMNB

100-240V AC/12V DC battery charger

ACCESSORIES

SWITCH BOX CABLE OECAV07V2000

Jumper cable for switch measuring box

ADDITIONAL POWER SUPPLY OCDL012EXBP

12 V external power supply package for T-REX probe and DEX extensometers

MULTIPLEXER CABLE OECAV10MUX0

Jumper cable for direct connection to multiplexer measuring boxes



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.

CRD



— CRD 400 READOUT

READOUT UNITS
AND DATALOGGERS





CRD - 400 READOUT

CRD-400 is a new generation multipurpose readout designed to take readings of all instruments including vibrating wire.

CRD-400 permits readings in both electrical and engineering units. Battery level, readout temperature and date are always displayed.


CRD-400 comes with shoulder/belt bag, battery charger, sensor cable with 6 alligator clips and USB flash drive with user manual.

FEATURES

- Compatible with all SISGEO analog sensors
- Large coloured display
- Accurate and precise measurements
- Splash-proof hand-held case
- Powered by Ni-MH rechargeable batteries

BENEFITS

- Easy to use
- Lightweight and portable
- Right and left hand users
- Auto shutdown
- Sunlight reliable display
- Reads both electrical and engineering units

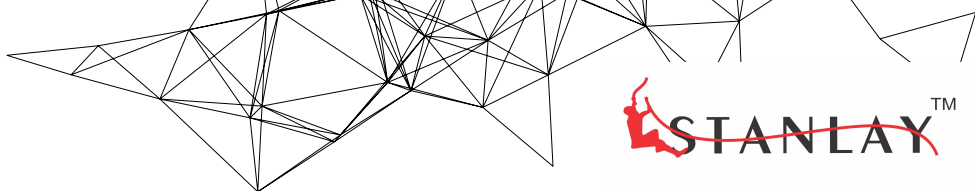

TECHNICAL SPECIFICATIONS

Type of measurements	mA - mV - V - mV/V - °C - Hz (µsec - digit - µε)
A/D converter	24-bit Sigma-Delta ADC (22 true bit)
Range and power supply	Current loop (2 wires): range 0÷21 mA - Power supply: 24V DC Transmitter (3 wires): range 0÷21mA - Power supply: 24V DC Voltage (4 wires): range ±10V - Power supply: 24V DC Wheatstone bridge (6 wires): range ±10 mV/V - Power supply: 5 V DC Servo-inclinometer: range ±10000 mV - Power supply: ±12V DC Platinum RTD (Pt100): range -150°C to +150°C - Power supply: 1 mA Thermistor (NTC): range -30°C to +150°C - Power supply: 0.04mA, 0.1mA, 1mA Vibrating Wire: range 400Hz to 6000Hz - Excitation sine wave signal (adaptive): ±10 V
Reading resolution	1µA at FS 20mA - 1µV at FS ±20mV - 10µV at FS ±1V - 100µV at FS ±10V 0.001mV/V at FS 10mV/V - 0.1°C for PT100 - 0.1°C for NTC 0.1 Hz at FS from 400 to 6000Hz
Accuracy	0.01 % FS (0.1% for Voltage and Servo-inclinometer, 0.2% FS for PT100 and NTC)
Temperature drift	0.001 % FS / °C
Rechargeable battery	4 x AA, NiMH, 2400 mAh
Operating time	min. 4h (constant use, 24 Vdc @ 20 mA @ 25 °C, maximum backlight, 2400 mAh batteries) min. 6h (constant use, 24 Vdc @ 20 mA @ 25 °C, 50% backlight, 2400 mAh batteries)
Battery charger	Programmable charger, IP41, input voltage: 100-240 V AC, 50-60 Hz, 1.3A
Display	Amorphous silicon TFT LCD panel with LED backlight unit, 320 x 240, 3.5", sunlight reliability
ENVIROMENTAL CONDITIONS	
Operating temperature	from -20°C to +60°C
Storage temperature	from -30°C to +70°C
PHYSICAL CHARACTERISTICS	
Weight	0.5 Kg
Dimensions (L x W x H)	100 x 230 x 45 mm
Protection Degree	IP67
Material	ABS
Connectors	1 x instrument, 1 x battery charger
CERTIFICATIONS	
Eletromagnetic compatibility	EN 61326-1 (2006)
Safety requirements	EN 61010-1 (2001)

We reserve the right to change our product without prior notice.

ITEMS INCLUDED

TRAVEL BAG

Splashproof shoulder/belt carrying bag.



BATTERY CHARGER 0ECABCRD400

100-240 Vac / 12 Vdc
battery charger



SENSOR CABLE 0ECAV8P6A00

Jumper cable with 6
alligator clips



USB FLASH DRIVE

User manual



ACCESSORIES

JUMPER CABLE 0ECAV08V2J0

Jumper cable with
2 connectors

SWITCH BOX CABLE 0ECAV08V2S0

Jumper cable for
switch measuring box



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.
The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages.
For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument.
The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

MIND



— **MIND**
READOUT

READOUT UNITS
AND DATALOGGERS





MIND READOUT

Mind is a portable and compact multichannel readout unit able to read all Sisgeo instruments, both analogue and digital. It is compact, rugged, with IP65 protection class and it is supplied with a specially designed carrying bag. The BLE (Bluetooth Low Energy) wireless technology permits a fast and safe communication with Mind App, with a very low batteries' consumption. Mind is fully managed by Mind App which is compatible with Android operating system and with iOS. Thanks to its App, Mind is a fast and light system for a quick and handy interface with the instruments, furthermore the data storage and sharing is made simpler and immediate. Mind App is also useful to read and utilize the QRcode placed on every analog Sisgeo instrument, having the identification, calibration and reading information always available.

When configuring sensors on the MIND app, calibration parameters of analog gauges (e.g. vibrating wire) can be downloaded from the Internet by entering the serial number.

MAIN ADVANTAGES

- Long battery life: minimum 8 hours continuously
- Supplied with Calibration Report issued following high level metrologic procedures
- High accuracy and resolution
- Simultaneous display of electrical and engineering measures
- Real time charts
- Quick read for immediate readings without configuration
- Multiplexers reading
- One-touch reading of digital gauge arrays
- Geolocation and search engine for sites and sensors
- Display the plot of vibrating wire sensor signal's spectrum with peak value
- Embedded Digital Sensor Configuration (DSC) tool

MIND APP


Thanks to its app, Mind is light system for a quick and handy interface with the instruments. The data storage and sharing is made simpler and immediate. Mind APP is also useful to read the QRcode placed on every analog Sisgeo instrument, having the identification, calibration and reading information always available.

Minimum Device Specifications
(device not supplied by SISGEO)

Bluetooth Low Energy BLE 4.2
APPLE iOS 16 or higher
Android OS 10 or higher




APP OVERVIEW

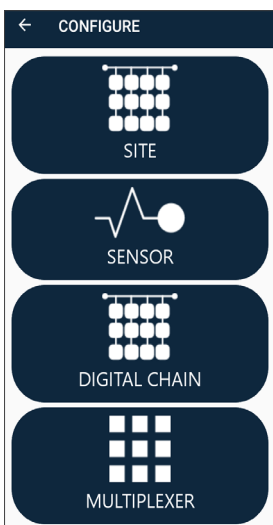


Instruments configuration main page.




QR code scanner for automatic configuration of analog sensors.

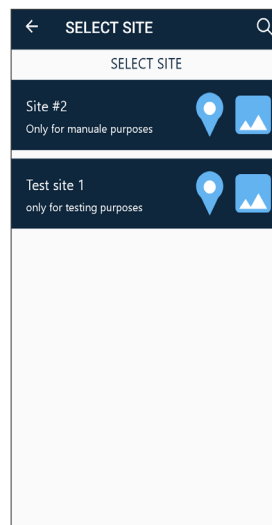


List of site with selectable icons to have info of geographical positioning and related picture.

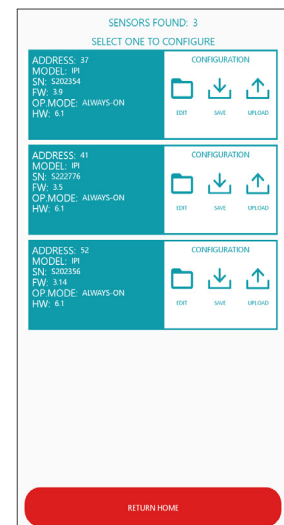


DSC (Digital Sensors Configuration) tool main page.

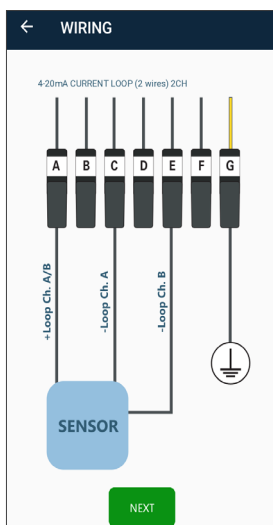

Guided clips wiring connection.

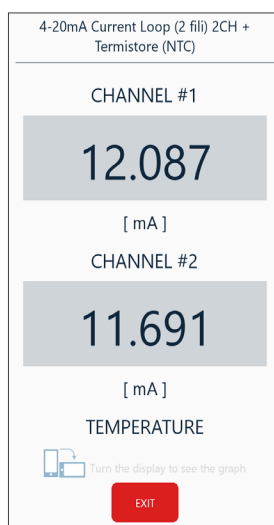

Instrument reading page with both biaxial 4-20mA current loop channels reading. The temperature measure is displayed scrolling down.

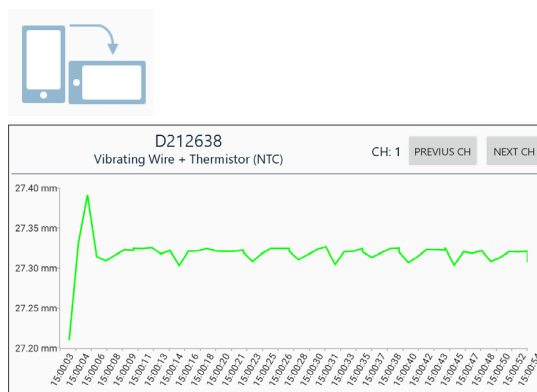

Graph of connected sensor's readings. It is generated just turning the mobile device in horizontal position.

MIND READOUT PHYSICAL FEATURES

Material / Weight	Aluminum / 1 Kg
IP class ⁽¹⁾	IP65
Overall dimensions	205x128x45 mm
Operating temperature	-20 to +55°C (charging +5°C to +40°C)
Storage temperature ⁽²⁾	-10 to +45°C for max 6 months, -20 to -10°C for max 1 month
Relative humidity	Operating: 60 ±25% RH Storage: 60 ±25% RH

(1) IP65 protection class is granted with closed connectors (i.e. with their own cap or with the cable connected) and with the on/off button not pressed.

(2) The periods indicated (6 months and 1 month) are the maximum time frames within which MIND must be recharged to not lose capacity and performance of its battery.



SISGEO COMPATIBLE INSTRUMENTS

Uniaxial 4-20mA current loop 2-wire gauges	Ratiometric 6-wire gauges	Vibrating wire gauges
Biaxial 4-20 mA current loop 2-wire gauges	RTD PT-100 temperature gauges	Vibrating wire + NTC Thermistor gauges
Biaxial 4-20 mA current loop 2-wire gauges + Thermistor	NTC Thermistor temperature gauges	Digital gauges or arrays with RS-485 Modbus RTU

OTHER COMPATIBLE SENSORS

Uniaxial and biaxial 4-20mA transmitters, 3-wire and 4-wire gauges	Carlson instruments 4-wire gauges	Uniaxial and biaxial servo-inclinometer gauges
Uniaxial and biaxial 4-20mA transmitters, 3-wire gauges + Thermistor	Carlson thermometers 3-wire gauges	RTD PT-100 temperature gauges 3-wire gauges
Ratiometric 4-wire gauge	Uniaxial and biaxial voltage gauges	Vibrating wire double coils gauges
Resistive strain gauge 1/2 bridge and 1/4 bridge	Uniaxial and biaxial potentiometers	

TECHNICAL SPECIFICATIONS⁽¹⁾

A - ANALOG INPUTS

Number of channels	3
Analog-to-Digital Conversion (ADC)	Resolution: 24bit, sampling rate: 2.5 Hz per channel with 50/60 Hz mains frequency rejection, Modulation method sigma-delta
Input impedance	>10 kΩ

A.1 - MEASUREMENT TYPES

A.1.1 - 4-20mA current loop (2 wires)

Range Resolution Accuracy	0-24 mA 1 μA at range 20 mA 6.0 μA
Internal shunt resistor	100 Ω
Power supply (up to 100 mA)	24V DC, 12V DC, external (selectable by the software)
Temperature drift	< 10 ppm / °C, range -30°C to +70°

A.1.2 - Wheatstone full bridge (6 wires, with sensing)

Range resolution accuracy	±15mV/V 0.001 mV/V 0.005mV/V
Power supply (up to 80 mA)	5 Vdc, external
Max and min bridge resistance	Max 10 kΩ - min 200 Ω
Temperature drift	< 10 ppm / °C, range -30°C to +70°C

A.1.3 - Platinum RTD (Pt100) 4-wire

Range resolution accuracy	-150°C to +150°C 0.1°C 0.3 °C
Power supply	1 mA
Temperature drift	< 10 ppm / °C, range -30°C to +70°C


A.1.4 - Thermistor (NTC 3 kΩ @ 25 °C)

Range resolution accuracy	-50°C to +150°C 0.1°C 0.2°C
Power supply	2-100 uA
Temperature drift	< 10 ppm / °C from 0 to 150 °C < 20 ppm / °C from 0 to -30 °C < 100 ppm/°C from -30°C to -50 °C;

A.1.5 - Vibrating Wire sensors

Range accuracy	300 to 6000 Hz 0.0033% FS
Excitation sine wave signal	Up to 12 Vpp (selectable by the software)
Resolution	0.01Hz at range 300÷1000Hz 0.02Hz at range 1000÷3000Hz 0.1Hz at range 3000÷6000Hz
Temperature drift	<10ppm/°C (-30°C to +70°C)

(1) The information and data in the "Technical specifications" table refer to tests performed with a calibrated control unit in an environment with controlled temperature and humidity, and using signal generators with cables shorter than 5 m.

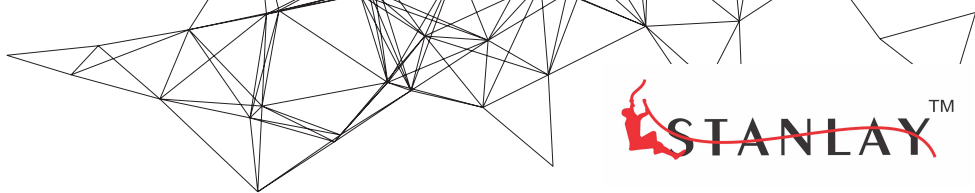

B - DIGITAL RS485 INPUTS

Max number of gauge per array	according to the consumption of each type of sensor and if configured in Always-on mode or in Timed mode
Interface and Protocol	RS485, MODBUS RTU
Power supply (up to 500 mA)	up to 24 V DC

C - COMMUNICATION WITH DEVICE

BLE (Bluetooth Low Energy) 5.2	band: 2.4 GHz ISM Band (2402-2480 MHz) - power: 4dBm Max
Led	Different colors for local notifications

D - ON-BOARD DIAGNOSTIC SENSORS

D.1 - INTERNAL TEMPERATURE	Range: -40°C to +125°C Resolution: 0.1°C Accuracy: ±1°C (-10°C to +85°C)
D.2 - INTERNAL HUMIDITY	Range: 0 to 100%RH Resolution: 0.1% RH Accuracy: ±5% (0 to 95%RH)
D.3 - BATTERY VOLTAGE MONITOR	Range: 0 to 18 V Resolution: 0.1 V Accuracy: ±5% FS

E - BATTERIES

Battery type - Voltage and capacity	Li-Ion rechargeable batteries - 7.4V - 2.6Ah
Operating time with Li-Ion batteries	min. 8h (constant use, 24 Vdc @ 20 mA x 2 @ 25 °C)
Charging temperature range	0°C to +45°C

F - BATTERY CHARGER

Input voltage	50-60 Hz 90-264 Vac
IP Class and temperature range	IP41 (for internal use only), Operating: -25°C to +40 °C
Max output power	10 W

G - OTHER COMPATIBLE SENSORS⁽²⁾

G.1 - 4-20mA transmitters (3-4 wires)

Range Resolution Accuracy	0-24 mA 1 µA 6.0 µA
-------------------------------	-------------------------

G.2 - Voltage 4 wires, differential

Range Resolution Accuracy	±12V 1 mV 4 mV
-------------------------------	--------------------

G.3 - Servo inclinometers

Range resolution accuracy	±10V 1 mV 2 mV
-------------------------------	--------------------

G.4 - 1/2 Wheats. bridge (5 wires, with sensing)

Range resolution accuracy	±15 mV/V 0.005 mV/V 0.05 mV/V
-------------------------------	-----------------------------------

G.5 - 1/4 Wheats. bridge (3 wires, w/o sensing)

Range resolution accuracy	±15 mV/V 0.005 mV/V 0.05 mV/V
-------------------------------	-----------------------------------

G.6 - Potentiometers

Range | resolution | accuracy

5V | 1 mV at range ± 5 V | 1 mV at range ± 5 V

G.7 - Wheatstone full bridge (4 wires, without sensing)

Range | resolution | accuracy

± 15 mV/V | 0.001 mV/V | 0.005 mV/V

G.8 - Carlson instruments (4 wires)

Range | resolution | accuracy

$\pm 10\%$ (ratio) | 0.01% (ratio) | 0.1% (ratio)

G.9 - Carlson thermometer (3 wires)

Range | resolution | accuracy

± 150 °C | 0.1°C | ± 1 °C

G.10 - PT-100 (Platinum RTD) (3 wires)

Range | resolution | accuracy

± 150 °C | 0.1°C | ± 1 °C

G.11 - Vibrating wire double coils (4 wires)

Range | accuracy

300 to 6000 Hz | 0.0033% FS

Excitation sine wave signal

Up to 12 Vpp (selectable by the software)

Resolution

0.01Hz at range 300÷1000Hz
0.02Hz at range 1000÷3000Hz
0.1Hz at range 3000÷6000Hz

Temperature drift

<10ppm/°C (-30°C to +70°C)



ACCESSORIES AND SPARE PARTS

JUMPER CABLE OECAV08V2J0

Jumper cable for MIND connection to an instrument supplied with military connector.



SWITCH BOX JUMPER CABLE OECAV08V2S0

Jumper cable for MIND connection to a switch terminal box.




MUX BOX-MIND JUMPER CABLE OECAVMINDMU

Jumper cable for direct connection from MIND to multiplexer boxes. NOTE: only new MUX BOX with M12 connector can be read with MIND. Old MUX-BOX with MIL connector which could be read with New Leonardo cannot be read with MIND.



7-CLIPS SENSOR CABLE (SPARE) OECAV8P6A00

Jumper cable with 7 alligator clips for instrument reading on signal cable wires.



DIGITAL GAUGE JUMPER CABLE (SPARE) OECAV8PDIGO

Jumper cable for MIND connection to digital gauges.



MIND CARRYING BAG (SPARE) OMIND1BAG00

Specially designed carrying bag for MIND readout. It includes shoulder belt.



BATTERY CHARGER (SPARE) OECABMIND00

Charger for Li-Ion batteries. Input voltage 90-264 Vac, 50-60 Hz IP rate IP41 Max output power 10 W



All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l. The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages. For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument. The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

OMNIA



OMNIAlog

23/10/15 08:16:31
LOG DL SYS
IP: 192.168.1.111
Bat: 14.0V - T: 28.3°C - H.N.C.

— OMNIALOG DATALOGGERS

READOUT UNITS
AND DATALOGGERS





OMNIALOG DATALOGGER

The OMNIAlog has been designed "in house" by Sisgeo and is the result of over 25 years experience using different dataloggers in geotechnical field.

OMNIAlog is a versatile, cost effective and low powered datalogger supporting vibrating wire and all major geotechnical sensors.

OMNIAlog has a mini web server on board, 24 local analog channels, expandable to 408 channels through multiplexers and 2 digital opto-isolated input ports. It can be managed by any Internet browser and also includes a USB flash drive support.

APPLICATIONS

- Tunnelling
- Dam surveillance
- Structural monitoring
- Mining exploration
- Deep excavation
- Landslide safety implementation
- Retaining walls
- Geotechnical investigation campaign

FEATURES

- No software required
- LAN Ethernet, USB and RS232 Comm ports
- High performances
(resolution, accuracy, environment -30°C +70°C)
- 32GB internal memory
- Stand alone or part of network
- Vibrating wire built-in interface
- Digital sensors support
- Compatible with all major geotechnical sensors



Meet the essential requirements of the EMC Directive 2004/108/EC and low voltage Directive 2006/95/EC

TECHNICAL SPECIFICATIONS

CPU AND MEMORY	OMNIALOG GT-2400	OMNIALOG GT-100D
Processor	ARM Cortex-M3 MCU with 1 MB Flash, 120 MHz CPU, ART Accelerator, Ethernet	
RAM Memory	1 Mbyte RAM with backup	
Mass storage	SD CARD 32 GB (*) and WEB pages	
Clock accuracy	High precision RTC (real time clock with battery back-up) self compensated in temperature (3ppm @ 25°C, 10ppm @ -30 +70°C)	
On-board sensors	Temperature measured on the electronic board (accuracy ±1 %)	
INPUT		
Analog differential inputs	24 differentials individually configured. Channel expansion provided by SISGEO multiplexers	-
Digital inputs	Two opto-isolated digital inputs individually selectable for switch closure, high frequency pulse and trigger. Independent 32-bit counters for each input. Max Input Voltage: 24V (Max Current: 10mA) Min Input Voltage: 5V (Max Current: 2mA)	
INTERFACES		
Display & Keyboard	Small backlight graphic LCD 128x64 dpi with membrane keyboard for the minimal local management without the PC. Keyboard for start a uniscan, sequential display of the last memorized readings for each channel (sensor ID, converted unit reading, UM), device status, data download and FW/web pages update by USB pen drive, safe mode (back-up/format/restore internal SD card)	
LAN ethernet isolated	10/100 Mbps, RJ45	
RS232	9-pin, DE9: DCE port for GSM/GPRS modem connection Baud Rates: selectable from 9600 bps to 115.2 kbps (default setting) Default Format: 8 data bits; 1 stop bits; no parity	
USB	USB 2.0 flash drive only (FAT 32), 5 V 200 mA	
RS485#1 opto-isolated	5 screw clamp: DCE port for max. No.250 SISGEO digital sensors Communication interface: RS485 Communication protocol: MODBUS RTU (SISGEO Protocol) The voltage ‘V OUT’ is switched on and off under program control. V OUT is the unregulated input power supply ‘V IN’ (1 A) Power supply management (always on or energy safe)	
RS485#2 opto-isolated	5 screw clamp: DCE port for max. 16 SISGEO multiplexer boards connection. Communication interface: RS485 Communication protocol: MODBUS RTU (SISGEO Protocol) The voltage ‘V OUT’ is switched on and off under program control. V OUT is the unregulated input power supply ‘V IN’ (1 A) Every channel of each multiplexer board is completely independent.	
SWITCHED OUTPUT	The voltage ‘V OUT’ is switched on and off under program control.	
POWER SUPPLY	V OUT is the unregulated input power supply ‘V IN’ (2 A)	

(*) Including system files

ANALOG MEASUREMENTS

OMNIALOG GT-2400

OMNIALOG GT-100D

Measurement rate (MR)

High precision measurement (low speed, 5 sps):

Init. analog (with auto-calibration): 27.80 sec
Instrument warm-up: depending on sensor configuration
Measurement: 5.41 sec

Standard measurement (20 sps):

Init. analog (with auto-calibration): 7.1 sec
Instrument warm-up: depending on sensor configuration
Measurement: 1.57 sec

Fast measurement (High speed 40 sps):

Init. analog (no auto-calibration): 2.65 sec
Instrument warm-up: depending on sensor configuration
Measurement: 0.45 sec

Note1: times indicated not valid for vibrating wire measures

Note2: init. analog phase is made only one time before the measurement cycle

Type of measurements

mA, mV, V, mV/V, °C, Hz (µsec, digit)

ADC

24-bit (22 true bit) differential
Analog-to-Digital Converters, 5SPS, 0-24
Average Function, auto-calibration and auto-range

Range and power supply

Current loop (2 wires): range 0÷25 mA

Power supply (selectable by the software, up to 100 mA):
24V DC, 10V DC, external

Transmitter (3-4 wires): range 0÷25mA

Power supply (selectable by the software, up to 100 mA):
24V DC, 10V DC, external

Voltage (4 wires): range ±100mV, ±1V, ±10V

Power supply (selectable by the software, up to 100 mA):
24V DC, 20V DC, 10V DC, 5 V DC, external

Servo inclinometer: range ±5V

Power supply (selectable by the software): ±12V DC
(dual), external

Wheatstone bridge (6 wires, with sensing): range ±10mV/V

Power supply (selectable by the software, up to 80 mA):
10 V DC, 5 V DC, external (max 10 Vdc)
Maximum bridge resistance: 10 kΩ
Minimum bridge resistance: 200 Ω

Platinum RTD (Pt100): range -150°C to +150°C

Power supply: 1.2 mA

Potentiometer: range ±2.5V

Power supply (selectable by the software): 10V DC, 5V DC

Thermistor (NTC): range -50°C to +150°C

Power supply: 0.05mA / 0.1mA / 1.2mA

Vibrating Wire: range 400Hz to 6000Hz

Excitation sine wave signal (adaptive): ±10 V

Reading resolution

1 µA at range 20 mA
10 µV at range ±100 mV - 100 µV at range ±1 V
1 mV at range ±10 V - 0.1 °C for Pt100 - 0.1 °C for NTC
0.1 Hz at range 6000 Hz - 0.001 mV/V at range ±10 mV/V

Measurement accuracy

0.01 % F.S. (0.1 % F.S. for Pt100 and NTC) with Standard
Measurement
Calibration in Sisgeo laboratories recommended every
2 years.

— **WR LOG**
WIRELESS MONITORING
SYSTEM

READOUT UNITS
AND DATALOGGERS





WR LOG WIRELESS MONITORING SYSTEM

WR LOG wireless monitoring system nodes can be connected to a wide variety of sensors and communicate with the Gateway using a Long Range Radio. Nodes can be easily set up through an Android app and the system offers a simple visualization web based software.

WR LOG is a low power consumption system that can reach up to 10 years battery life. Distance between node and gateway can arrive up to 15 km.

The system allows the remote connection and offers near real time data that can be pushed to other visualization softwares through FTP, API calls and Modbus TCP.

FEATURES

- Long-range communication of over 15km
- Truly low-power, 10 years of unattended runtime
- Wireless LPWA communication
- Supports most structural and geotechnical instruments
- User-friendly web software

BENEFITS

- Remotely monitor hard-to-access infrastructures
- Cover a wide area with geotechnical sensors
- Easily add sensors to extend measurement range
- Save resources through fast implementation
- Diminish risks and make operations safer



Meet the essential requirements of the EMC Directive 2014/30/EU and RED directive 2014/53/EU

4G GATEWAY OLSWR000GW4

It is an outdoor LoRa gateway equipped with a 4G Worldwide module with 3G/2G fallback. The gateway receives readings from the nodes and pushes data through the integrated 4G modem to a server for management and visualization. It includes an external waterproof connectors (RJ45, SIM card), an easy installation mounting kit and USB (Type C) connector for local access. The internal processor can manage up to 50 data messages every minute in single gateway network architecture. The gateway incorporates 1 x green LED for power and 1 x red LED for system status. The SIM card port accepts mini-SIM format.

TECHNICAL SPECIFICATIONS

PRODUCT CODES: ⁽¹⁾

OLSWR868GW4

OLSWR915GW4

OLSWR923GW4

RX: 863- 873MHZ, TX: 863-873MHZ

RX: 902-915MHZ, TX: 922-928MHZ

RX: 915-928 MHz, TX: 915-928MHZ

(according to hardware capabilities)

BASE STATION

Band

ISM Sub 1 GHz
sensitivity down to -137 dBm (SF11)

Integrated internal antennas

GPS, 4G and LoRa (peak gain = 2.6dBi)

Memory

DDRAM 256MB, 8GB eMMC
(6GB available for user)

GNSS receiver

GPS, GLONASS, QZSS & SBAS

External antenna (included)

3 dBi vertical omni-directional, 30cm length
868/915/923 MHz

POWER

Powered by

- PoE both Mode A and Mode B
(802.3af specifications)
- ±48 VDC through RJ45 (isolated power)

Mean power consumption

4.5 Watts

Power over Ethernet

PoE injector for indoor use included in the kit

NETWORK INTERFACES

Ethernet

10/100 Ethernet WAN (RJ45 PoE)
(LAN cable not included)

Integrated 4G Modem ⁽²⁾

Worldwide LTE, UMTS/HSPA+ and
GSM/GPRS/EDGE coverage



PHYSICAL FEATURES

Overall Dimensions

265x165x100 mm without
ext. antenna

Weight

1.4 kg (mounting kit included)

IP class

IP67

Materials: Back

Aluminum

Front

Polycarbonate

Mounting kit

Stainless steel

Operating temp. range

-40°C to +60°C

(1) For more information regarding how to choose the right Gateway band, see FAQ #089 on our web site www.sisgeo.com

(2) WWAN capabilities are listed in F.A.Q. #107 on www.sisgeo.com.

VIBRATING WIRE NODES OLSWR1CHVWS/OLSWR5CHVW0

The vibrating wire nodes are able to manage 1 or up to 5 vibrating wire instruments such as piezometers, crack meters, strain gauges, etc... It has an embedded barometer useful for piezometers' data compensation. Examples of application are column of multipoint piezometers, 3-D crack meters, rosette-mounting strain gauges, multipoint extensometers. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channels	1 or 5 (vibrating wire + thermistor)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 72500 readings incl. time and 5 sensors Up to 200000 readings incl. time and 1 sensor
Time synchronization by radio	time discipline better than ± 10 seconds
Power supply	1 CH: 1 x C-size 3.6V high power battery 5 CH: from 1 to 4 x C-size 3.6V high power batteries

VIBRATING WIRE INPUT

Measurement method	Embedded algorithms increasing immunity to noise		
Excitation wave	± 5 V		
Measurement range	300 to 7000 Hz		
	Excitation frequency	Accuracy	Resolution
Sweep A	450 - 1125 Hz	0.013%	0.002 Hz
Sweep B	800 - 2000 Hz	0.008%	0.002 Hz
Sweep C	1400 - 3500 Hz	0.010%	0.004 Hz
Sweep D	2300 - 6000 Hz	0.009%	0.007 Hz

THERMISTOR INPUT

Measurement range	0 Ω to 4 M Ω
Resolution	1 Ω
Accuracy (20°C)	0.05°C (0.04% FS)

EMBEDDED BAROMETER

Pressure Range	300 to 1100 hPa
Relative Accuracy (950 to 1050 hPa at 25°C)	± 0.12 hPa

PHYSICAL FEATURES

Box Dimensions (WxLxH)	
1 channel node	100x100x61 mm
5 channels node	100x200x61 mm
Overall Dimensions without antenna (WxLxH)	
1 channel node	140x120x61 mm
5 channels node	140x220x61 mm
External antenna	114 mm length (including connector)
Housing material	Aluminium alloy
IP class	IP67
Weight (without antenna and batteries)	
1 channel node	0.66 kg
5 channels node	1.27 kg
Operating temperature	-40°C to +80°C

BATTERY LIFE ESTIMATION⁽¹⁾

1 CH, sampling 5 min, 1 x battery	1 year
1 CH, sampling 1 hour, 1 x battery	3.5 years
5 CH, sampling 5 min, 4 x batteries	2.2 years
5 CH, sampling 1 hour, 4 x batteries	7.1 years

(1) Based on mathematical model using SAFT LSH14 batteries, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Bear in mind that consumption varies depending on the sensor used, sampling rate and environmental conditions.

ANALOG NODE OLSWR4CHANLO

Analog nodes are 4 channel devices that support several voltage output, 4-20mA output, potentiometer, Wheatstone bridge, thermistor and PT100. Each channel can be individually configured according to the sensor output.

Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channel	up to 4 (individually configurable by the user)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 200000 readings incl. time and 1 sensor Up to 72500 readings incl. time and 4 sensors)
Time synchronization by radio	time discipline better than ± 10 seconds
Instruments power supply	5 V DC / 12 V DC / 24 V DC (up to 60 mA) selectable for each channel
Power supply	from 1 to 4 x C-size 3.6 V high power battery
INSTRUMENT INPUTS	
Voltage measuring ranges	± 10 V DC
Voltage output accuracy (-40 to +85°C)	± 0.05 % FS
Current loop 4-20mA accuracy (-40 to +50°C)	± 0.05 % FS
Potentiometer accuracy (0 to +50°C)	± 0.02 % FS
Wheatstone bridge accuracy (0 to +50°C)	± 0.1 % FS (full bridge) ⁽¹⁾
Thermistor accuracy (0 to +50°C)	± 0.2 °C
PT-100 accuracy (20°C)	± 0.8 °C

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x200x61 mm
Overall Dimensions without antenna (WxLxH)	140x220x61 mm
External Antenna	114 mm length (including connector)
Housing material	Aluminium alloy
IP class	IP67
Operating temperature	-40°C to +80°C
Weight (without antenna and batteries)	1.10 kg

BATTERY LIFE ESTIMATION⁽²⁾

	Current @ 12V @ 24 mA, SF9	Current @24V @24 mA, SF9	Voltage @ 12V @ 24 mA, SF9	Full Wheatstone bridge @5V @350 Ω , SF8	POT @5V @1 k Ω , SF8
Warm-up time	1 seconds	1 seconds	1 seconds	-	-
1 channel, sampling 5 minutes	6 months	4 months	5.4 months	1.4 years	1.5 years
1 channel, sampling 6 hours	>10 years	>10 years	>10 years	>10 years	>10 years
4 channels, sampling 5 minutes	2.2 months	1.4 months	2 months	3.8 months	5.2 months
4 channels, sampling 6 hours	8.8 years	6.4 years	8.4 years	>10 years	>10 years

(2) Estimations with 4 SAFT LSH14 batteries, based on mathematical models. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

MINI NODE OLSWR1CHANPO

The Mini node is the easiest way to connect an electric load cell to WR LOG wireless network. Mini node can also manage potentiometers, ratiometric sensors and pulses (i.e. rain gauges). On a dedicated channel can be also connected a thermistor probe. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Number of channels	1 individually (configurable, no thermistor) 1 thermistor (not configurable) 1 pulse counter (not configurable)
Sampling rate	30 seconds to 1 day
Internal data storage	Up to 200000 readings incl. time
Instruments power supply	5 V DC (up to 50 mA)
Power supply	1 or 2 x C-size 3.6 V high power battery

INSTRUMENT INPUTS

Potentiometer/Ratiometric measuring ranges	0÷5 V DC , 0÷1 V/V
Potentiometer/Ratiometric accuracy (-40 to +80°C)	0.1% FS
Full Wheatstone bridge measuring ranges	±7.8 mV/V (4-wires) ⁽¹⁾
Full Wheatstone bridge accuracy (-40 to +80°C)	0.13 %FS
Single-ended voltage ranges	0÷5 V DC
Single-ended voltage accuracy (-40 to +80°C)	0.6% FS
Thermistor measuring ranges	0 to 2 MΩ
Thermistor ⁽²⁾ accuracy (-40 to +80°C)	0.04 °C (thermistor sensor error not included)
Pulse (dry contact) accuracy	±1 pulse
Pulse (dry contact) rate	0 to 50 Hz
Built-in temperature sensor accuracy	±2°C

(1) In case of reading of a Wheatstone bridge gauge, we suggest to have maximum 30m of signal cable from gauge to node

(2) Thermistor model: 3000 Ω@25°C

PHYSICAL FEATURES

Box Dimensions (WxLxH)	113x80x60 mm
Overall Dimensions (WxLxH)	120x80x60 mm
Housing material	Polycarbonate
IP class	IP67
Operating temperature	-40°C to +80°C
Weight (without batteries)	0.24 kg
Antenna	Internal antenna

BATTERY LIFE ESTIMATION⁽³⁾

	1 x battery	2 x batteries
sampling 5 minutes	0.9 year	1.8 years
sampling 1 hour	5.0 years	8.1 years
sampling 6 hours	6.5 years	9 years

(3) Based on the lifetime mathematical model, SF9, potentiometer + thermistor. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

DIGITAL NODE

PRODUCT CODE OLSWRDIG000

Digital node can manage 1 chain of Sisgeo digital instruments such as BH-profile in-place inclinometers, MD-Profile inclinometers, LT-Inclibus, MEMS in-place inclinometers, tiltmeters, Railway Deformation System (RDS), extensometer probes (DEX), extenso-inclinometer probes (DEX-S), liquid settlement system (H-level), load cells and multipoint borehole extensometers (MPBX), amongst others. For the maximum number of gauge in the chain and the needed power supply, please refer to the related table in next page. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Input	One RS485 channel and two SDI-12 channels
RS485 mode	Modbus RTU, full or half-duplex supported
Instruments power supply	regulated 12 VDC (up to 200 mA)
Sampling rate	30 seconds ¹ to 1 day
Time synchronization by radio	time discipline better than ±30 seconds
Power supply	4 x C-size 3.6 V high power battery

(1) Depending from the model of the gauges connected, numbers and powering mode

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x200x61 mm
Overall Dimensions without antenna	140x220x61 mm
External Antenna	114 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-40°C to +80°C
IP grade	IP67
Weight (without batteries and antenna)	1.15 kg

INTERNAL BATTERY LIFE ESTIMATION⁽²⁾

10 IPI (always on), sampling 5 minutes	60 days
30 IPI (always on), sampling 5 minutes	12 days
30 IPI (always on), sampling 30 minutes	72 days (2.3 months)
30 IPI (always on), sampling 6 h	864 days (28.4 months)
10 IPI (timed mode), sampling 5 minutes	80 days
30 IPI (timed mode), sampling 5 minutes	22 days
30 IPI (timed mode), sampling 30 minutes	130 days (4.3 months)
30 IPI (timed mode), sampling 6 h	1500 days (4.1 years)

(2) Considering laboratory conditions. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

Data not valid for powering with external solar power kit.

MAXIMUM NUMBER OF DIGITAL INSTRUMENTS CONNECTED TO DIGITAL NODE

INSTRUMENT MODEL	MAXIMUM NUMBER OF GAUGES PER NODE WITH SISGEO V3 PROTOCOL	NEEDED EXTERNAL POWER SUPPLY ⁽¹⁾	NEEDED INSTRUMENTS' POWER CONFIGURATION ⁽²⁾
Digital BH-Profile IPIs, uniaxial and biaxial (model S431HD, S432HD, S441HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital IPIs, uniaxial and biaxial (Model S411HD, S412HD, S421HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital MD Profiles, uniaxial and biaxial (Model MDP30V, MDP30H)	up to 30 gauges ⁽³⁾	NO	from 1 to 30 gauges: ALWAYS-ON or TIMED
Digital LT Inclibus, uniaxial and biaxial ⁽⁴⁾ (Model LTIBV, LTIBH)	up to 30 gauges ⁽³⁾	NO	from 1 to 30 gauges: ALWAYS-ON or TIMED
Digital Tiltmeters, uniaxial and biaxial (Model S541HD, S542HD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital H-Levels (Model HLEV000D)	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital RDS gauges (Model S7RDSHD)	up to 30 gauges ⁽³⁾	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digital DEX and DEX-S gauges (Model DEX350000D, DEX35S000D)	up to 18 gauges	YES	from 1 to 18 gauges: TIMED
Digitalized anchor load cells (Model L200 + 0ELCDIG4850)	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digitalized Resistive Piezometers (Model P235) <i>Available on request</i>	up to 30 gauges	NO	from 1 to 15 gauges: ALWAYS-ON or TIMED from 16 to 30 gauges: TIMED
Digitized MPBX or MEXID extensometers up to 2 anchor points each extensometer (Model D2MX02D)	up to 30 extensometers	NO	from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 30 extensom: TIMED
Digitized MPBX or MEXID extensometers 3 anchor points each extensometer (Model D2MX03D)	up to 18 extensometers	NO	from 1 to 15 extensometers: ALWAYS-ON or TIMED from 16 to 18 extensom: TIMED
Digitized MPBX or MEXID extensometers up to 6 anchor points each extensometer (Model D2MX04D)	up to 12 extensometers	NO	from 1 to 12 extensometers: ALWAYS-ON or TIMED

(1) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit).

(2) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(3) Extensible up to 50 units using "50 incl sin" protocol, under certain conditions: all the sensors in the chain shall be same model of sensors, shall be tilt sensors (uniaxial or biaxial, triaxial sensors are not allowed), output measuring unit shall be sin(angle), powering mode shall be TIMED with warm-up time 3 seconds and address delay 3 seconds, sensors shall have continuous RS-485 addresses from 1 to X (with $X \leq 50$).

(4) Each LTInclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

MAXIMUM NUMBER OF 360° INCLINOMETERS CONNECTED TO DIGITAL NODE

INSTRUMENT MODEL	PROTOCOL UTILIZED ⁽¹⁾	MAX. NUMBER OF GAUGES PER NODE	NEEDED EXT. POWER SUPPLY ⁽²⁾	INSTRUMENTS' POWER CONFIGURATION ⁽³⁾
360° digital tiltmeters, triaxial (model 0S543HD3600)	INCLI360_1-2-3	40	NO	from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED
	INCLI360_1-4	50		
	INCLI360_2-5	50		
	INCLI360_3-6	50		
	INCLI360_ACC	50		
360° digital LT-Inclibus, triaxial ⁽⁵⁾ (model 0LTIB103602, 0LTIB203602 and 0LTIB403602)	INCLI360_1-2-3	40	NO	from 1 to 20 gauges: ALWAYS-ON or TIMED from 21 to 50 ⁽⁴⁾ gauges: TIMED
	INCLI360_1-4	50		
	INCLI360_2-5	50		
	INCLI360_3-6	50		
	INCLI360_ACC	50		

(1) Various protocols are available for 360° triaxial sensors. For the most common applications, we recommend using the "INCLI360_1-2-3" protocol, which allows all three main channels of each instrument to be read.

The "INCLI360_ACC" protocol allows reading the three calibrated gravity accelerations gx, gy and gz.

To be able to use the other protocols "INCLI360_1-4" (reading channels 1 and 4), "INCLI360_2-5" (reading channels 2 and 5) and "INCLI360_3-6" (reading channels 3 and 6), check on the instrument's user manual if your application allows the use of these protocols.

(2) If the external power supply is needed, add to the order the accessories' codes 0AX10W003AH (solar panel kit) and 0OMX24V030W (digital sensor kit), or 0AXBCO22015 (mains power supply kit) and 0OMX24V030W (digital sensor kit).

(3) For more information regarding the power configuration of digital instruments please refer to F.A.Q.#094 "Which are the available powering modes for SISGEO digital sensors?" on Sisgeo web site <https://www.sisgeo.com/>.

(4) If the protocol used is "INCLI360_1-2-3," the maximum number of TIMED instruments readable with the digital node is 40.

(5) Each LT-Inclibus can have 1, 2 or 4 gauges. Please take into consideration the number of gauges, not the number of 2m rods instrumented.

POWERING ACCESSORIES

If a WR-LOG digital node is used to read a string of sensors that needs to be powered separately, a solar panel power kit or a kit with mains power should be provided.

SOLAR PANEL KIT 0AX10W003AH

It consists of a 10W solar panel (supplied without pole mount) with 10m cable and IP65 plastic box that houses a 2.3 Ah battery and charge controller. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

MAINS POWER SUPPLY KIT 0AXBCO22015

It consists of an AC/DC charger (Vin 85-265 Vac, 50-60 Hz, Vout 13.4 Vdc/0.9 A), and an IP65 plastic box that houses a 2.3 Ah battery. The box is ready for the digital sensor kit 0OMX24V030W (must be installed and supplied separately).

DIGITAL SENSOR KIT 0OMX24V030W

Consisting of a wiring board and a 30W 12V to 24V DC/DC converter. The digital instrument kit must be installed inside the box of either the 0AX10W003AH kit or the 0AXBCO22015 kit.

WIRELESS TILTMETER OLSWR03INC90

Node with embedded tri-axis tilt meter and temperature sensor for buildings and other civil structures monitoring. The inclinometer works with respect to gravity's direction.

Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Sampling rate	30 seconds to 1 day
Time synchronization by radio	time discipline better than ± 10 seconds
Power supply	from 1 to 2x C-size 3.6 V high power battery
INCLINOMETER SENSOR	
Technology	MEMS accelerometer
Axes	three (tri-axis)
Range	$\pm 90^\circ$
Accuracy ($\pm 2^\circ$)	$\pm 0.0025^\circ$
Accuracy ($\pm 4^\circ$)	$\pm 0.005^\circ$
Accuracy ($\pm 15^\circ$)	$\pm 0.013^\circ$
Accuracy ($\pm 45^\circ$)	$\pm 0.038^\circ$
Accuracy ($\pm 86^\circ$)	$\pm 0.060^\circ$
Resolution	0.0001°
Offse temperature dependancy	$\pm 0.002^\circ / ^\circ\text{C}$
Repeatability	$< 0.0003^\circ$
Stability @ 14 hours	$< 0.003^\circ$
Built-in temperature sensor resolution	0.1°C
Built-in temperature sensor accuracy	$\pm 0.5^\circ\text{C}$

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x100x61 mm
Overall Dimensions without antenna	150x120x61 mm
External Antenna	100 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-40°C to $+80^\circ\text{C}$
IP class	IP68 (2m max 2 hours)
Weight (without batteries and antenna)	0.6 kg
Vibration resistance	Do not subject the device to accelerations that exceed higher levels of accelerations than $\pm 8g$.

BATTERY LIFE ESTIMATION⁽¹⁾

sampling 30 sec - 2 x batteries	4.8 months
sampling 5 min. - 2 x batteries	3 years
sampling 1 hour - 2 x batteries	9.5 years

(1) Based on mathematical models, considering South Europe environmental conditions, SF8. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.

WIRELESS TILTMETER & LASER DISTANCE GAUGE OLSWRLASEINC

Node with embedded tri-axis tiltmeter and laser distance gauge for measuring the relative distance between the gauge and another point (target or natural surface). The node include also a temperature gauge. Batteries are not included with the node and shall be ordered separately.



TECHNICAL SPECIFICATIONS

Sampling rate	30 seconds to 1 day	
Power supply	2x C-size 3.6 V high power battery	
LASER DISTANCE GAUGE		
Technology	Visible Laser Class II laser 655 nm	
Measuring range (considering favorable conditions)	from 0.05 m to 150 m	
Repeatability	0.15 mm	
Resolution	0.1 mm	
Accuracy:	favorable conditions ⁽¹⁾	unfavorable conditions ⁽²⁾
distance 1 m	±1 mm	±2 mm
distance 10 m	±1 mm	±2 mm
distance 20 m	±1.5 mm	±3 mm
distance 50 m	±4 mm	±7 mm
distance 100 m	±9 mm	±15 mm
distance 150 m	±16 mm	not applicable
Built-in temperature sensor accuracy	±1 °C	
TILTMETER ⁽³⁾		
Technology	tri-axis MEMS accelerometer	
Range	±90°	
Accuracy (±2°)	±0.0025°	
Accuracy (±86°)	±0.060°	
Resolution	0.0001°	
Offse temperature dependancy	0.002° / °C	
Repeatability	<0.0003°	
Stability @ 14 hours	<0.003°	

PHYSICAL FEATURES

Box Dimensions (WxLxH)	100x100x61 mm
Overall Dimensions without antenna	150x120x61 mm
External Antenna	100 mm length (including connector)
Housing material	Aluminium alloy
Operating temperature	-10°C to +50°C
IP class	IP68 (2m max 2 hours)
Weight (without batteries and antenna)	0.85 kg

BATTERY LIFE ESTIMATION ⁽⁴⁾

sampling 5 min, 2 x batteries	1.6 years
sampling 1 hour, 2 x batteries	9.1 years
sampling 6 hours, 2 x batteries	>10 years

(1) on natural objects (white wall, low target illumination <3K lx, moderate temperatures)


(2) on natural objects (white wall, high target illumination with 30K lx, full specified operating temperature range)

(3) for tiltmeter full specifications refer to "wireless tiltmeter" specifications

(4) based on mathematical models, considering South Europe environmental conditions, SF8, and measurements at maximum distance of 20m. Extreme temperatures could cut-down the capacity by 20 to 40%. Check the battery specifications. USB not used.



SOFTWARE SUITE

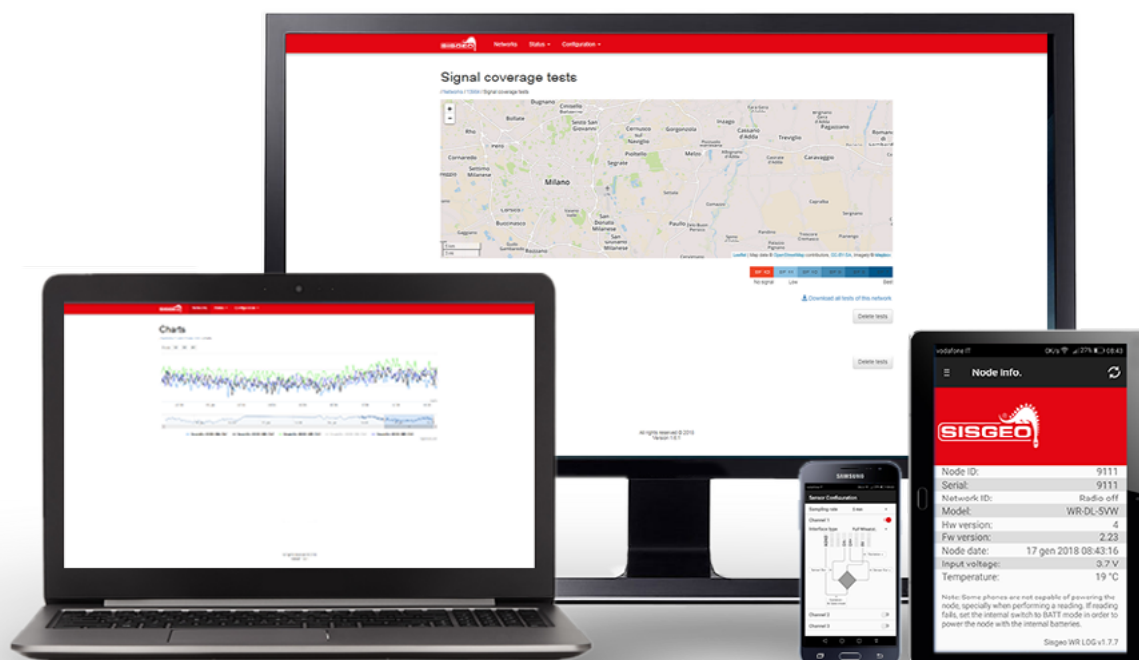

GATEWAY NETWORK AND ASSET MANAGEMENT SOFTWARE (ON BOARD WEB SERVER)

Network communications configuration and control

Wireless data unit and sensor attributes display

Wireless data unit configuration

Sensor data in near real time

Conversion of raw sensor data in engineering units

Manual and automatic data download in .csv

Data transmitted in a secure manner

Remote change of sensor's sampling rate

Data accessible through ModbusTCP

Able to push data on user FTP

WR LOG CONFIGURATION APP FOR NODES

Simple and fast connection to wireless node by USB-OTG cable

Runs on most Android devices supporting standard OTG USB cable

Easy sensor configuration: ID, sampling rate, frequency sweep, interface type, etc.

Checks radio signal coverage


Records coordinates (GPS)

Downloads data from wireless node and sends by e-mail or saves it on the Android device


Takes current reading

Updates wireless node firmware


TYPICAL SYSTEM ARCHITECTURE

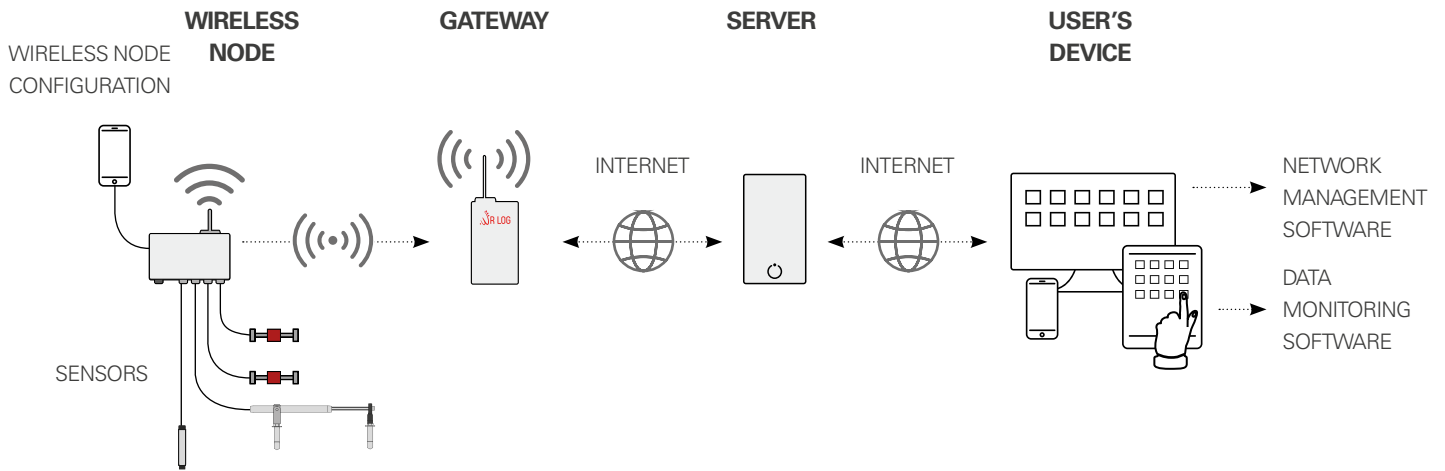


EXAMPLE OF CITY APPLICATION

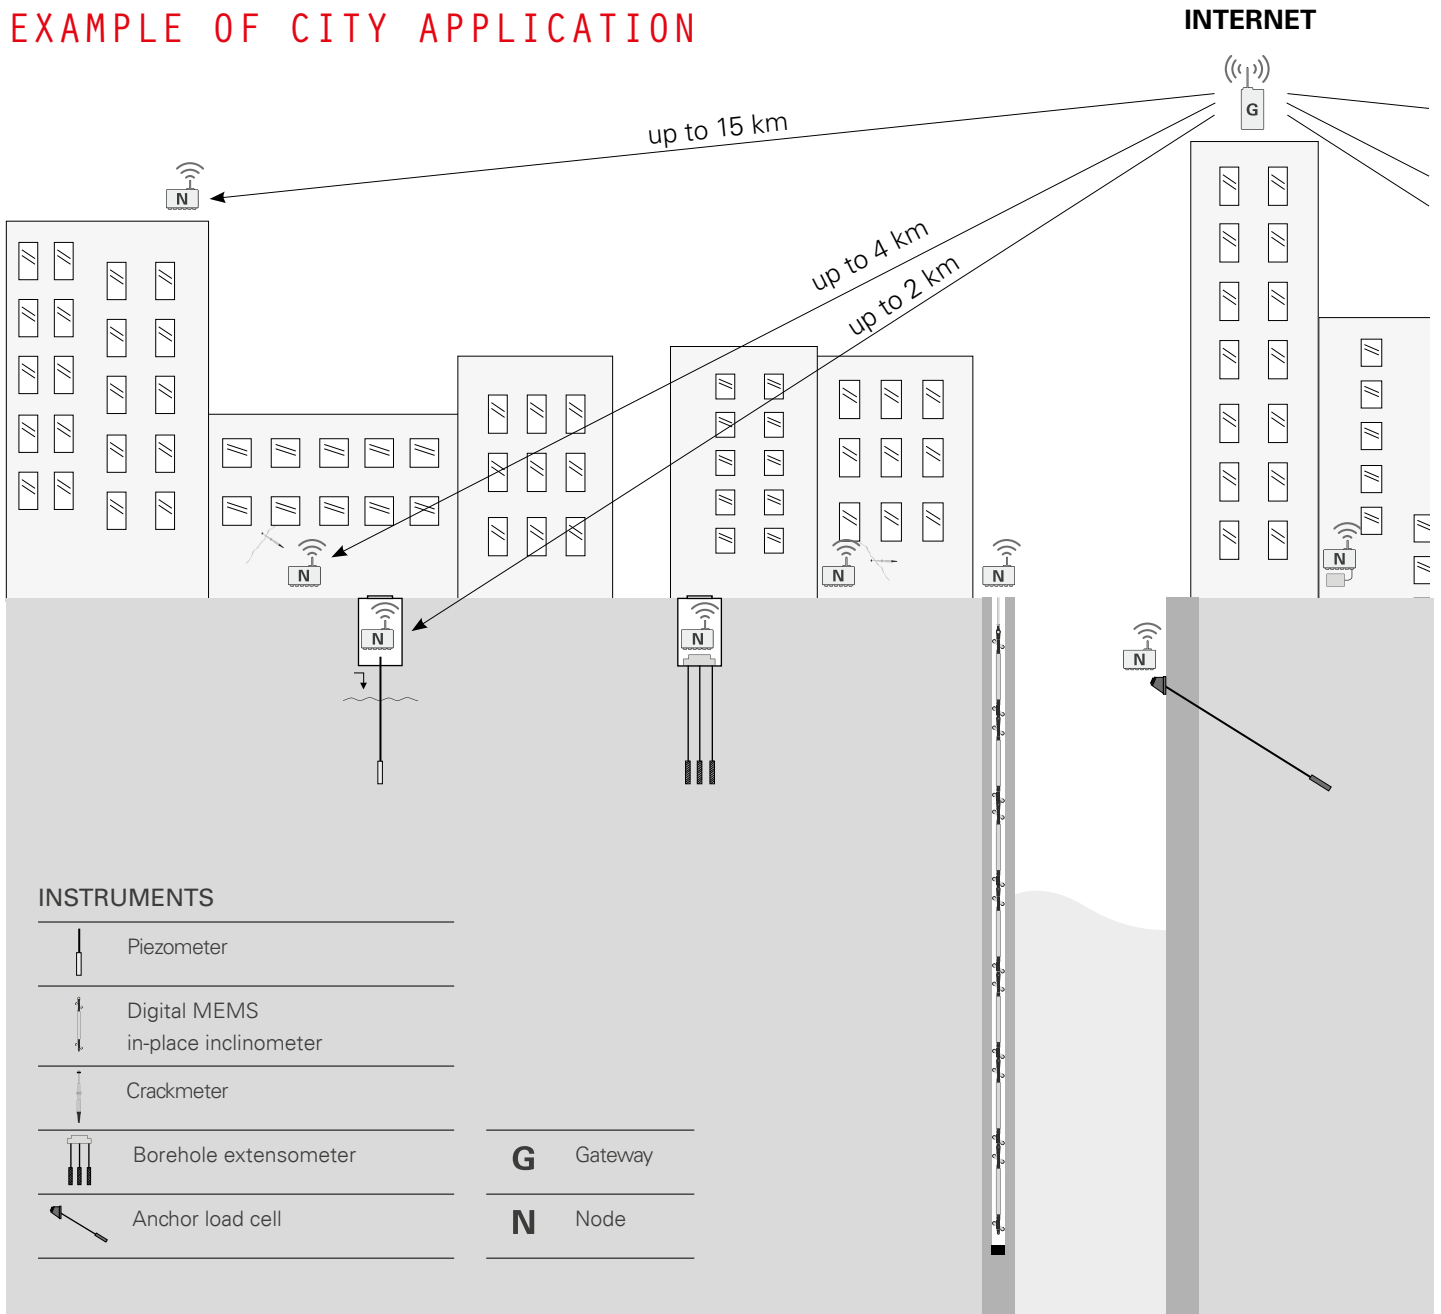


EXAMPLE OF MINES APPLICATION

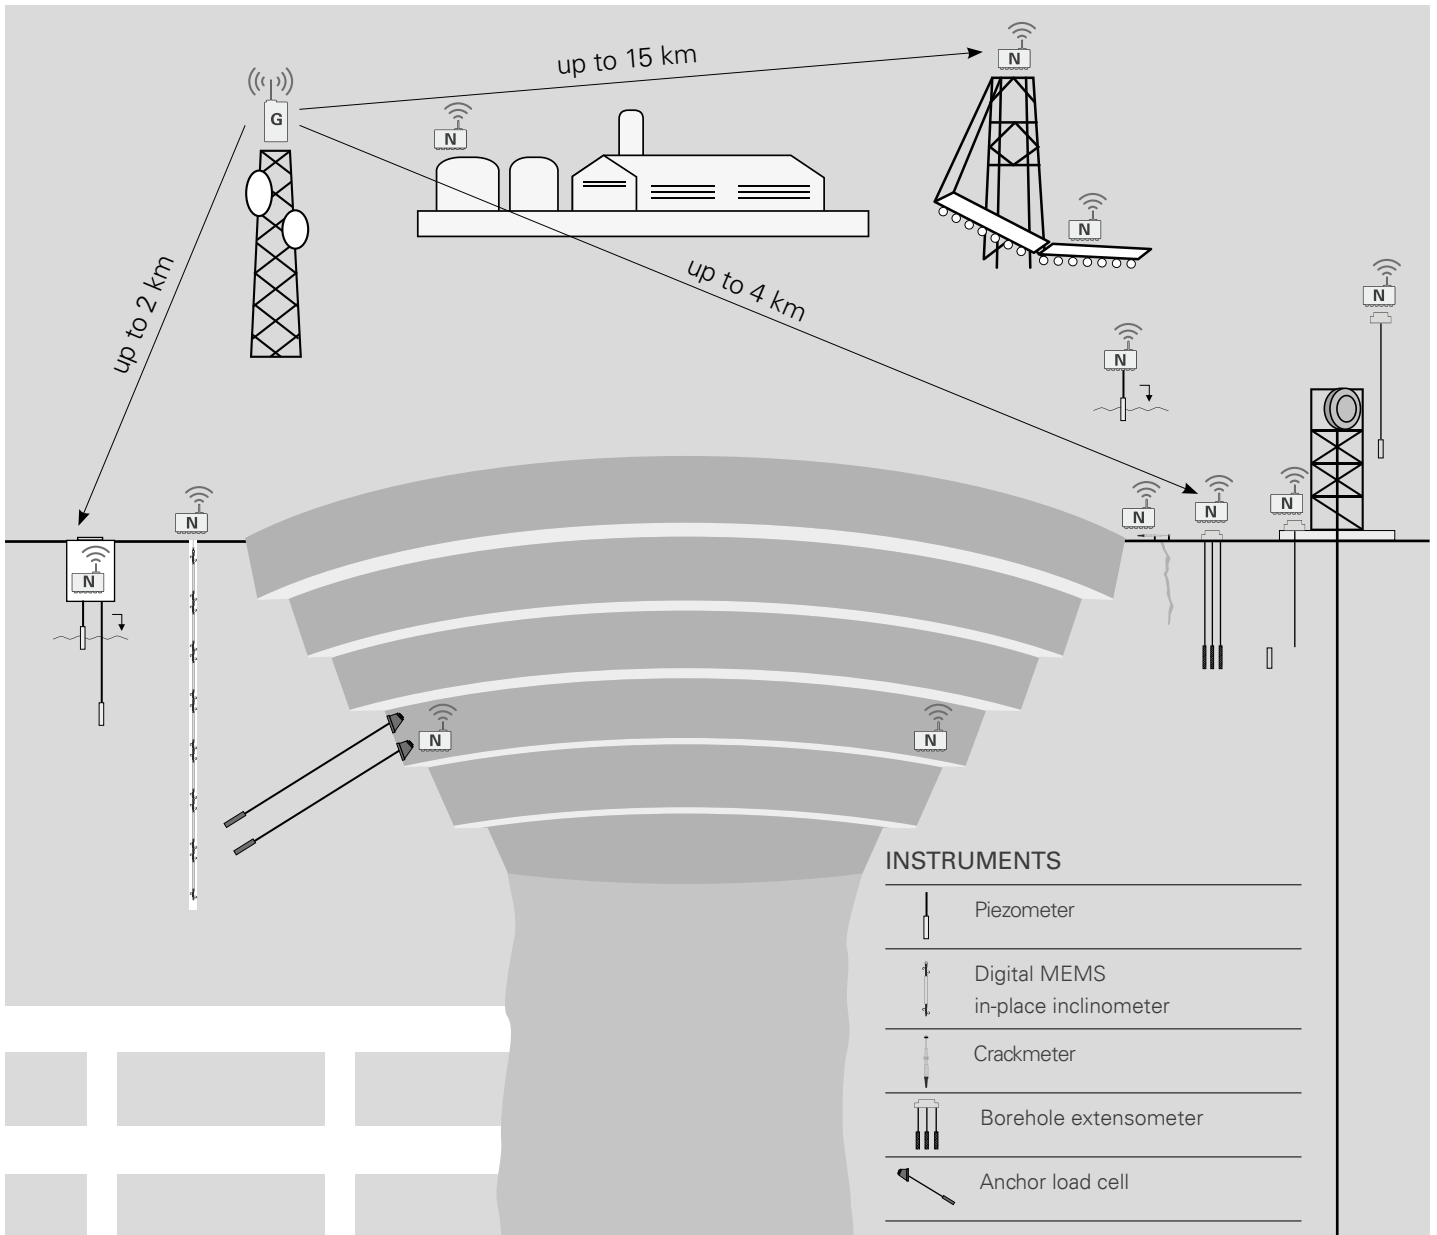


EXAMPLE OF TUNNEL APPLICATION

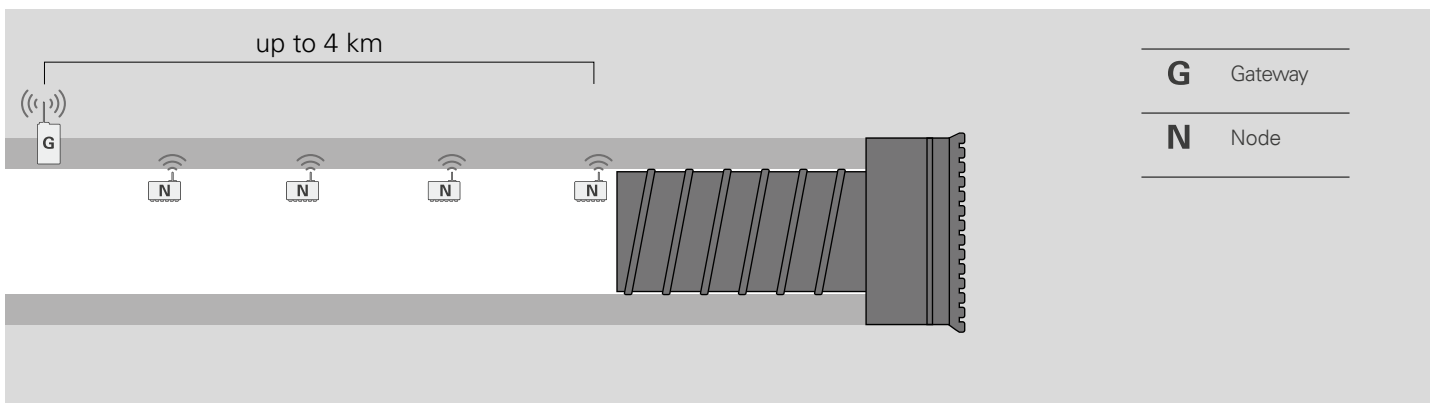

EXAMPLE OF DAM APPLICATION

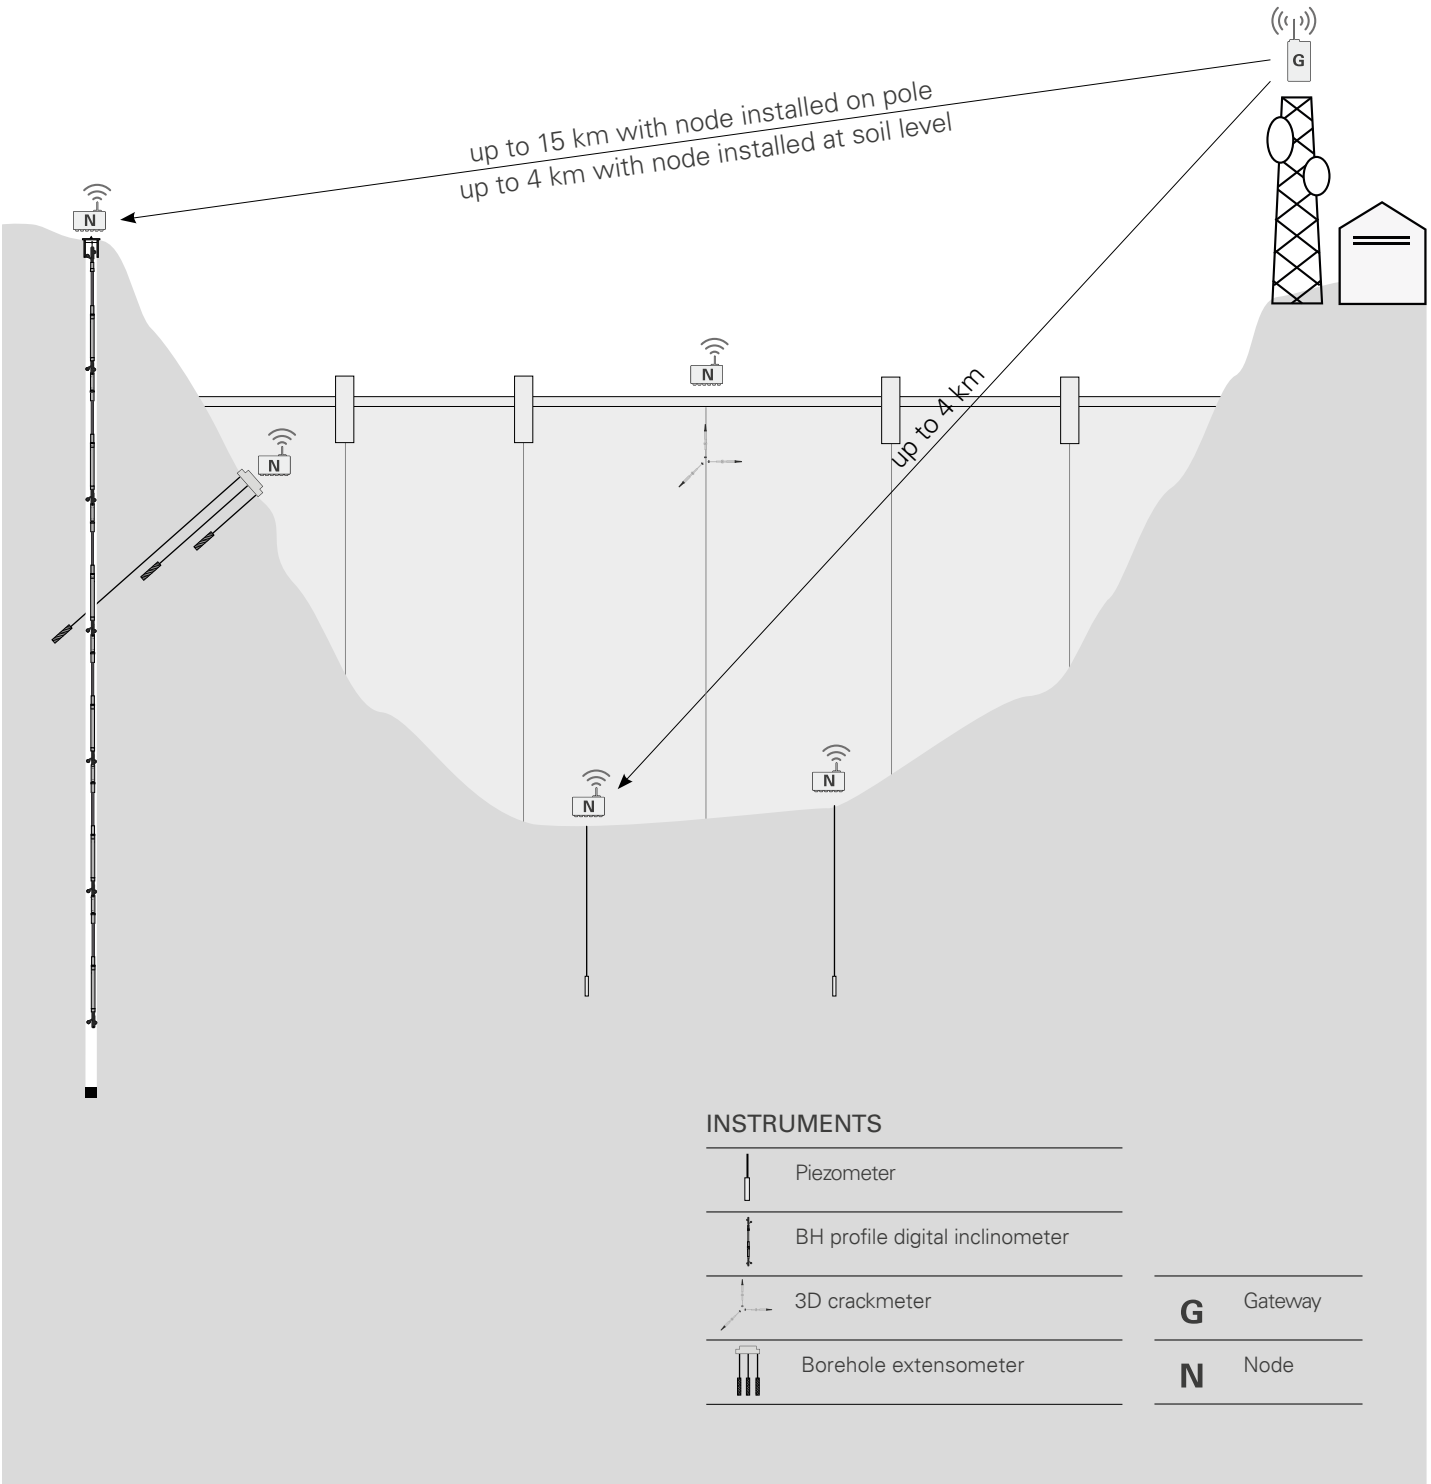

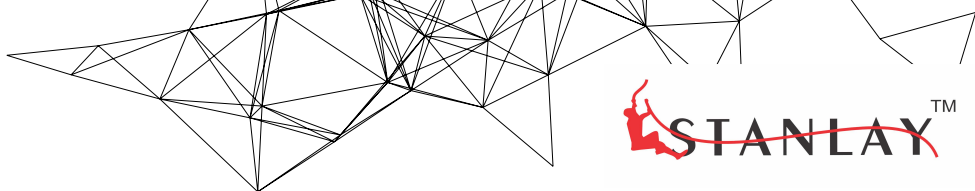

ACCESSORIES AND SPARE PARTS

C-SIZE BATTERY FOR NODES OLSWROBATT

3.6 V lithium-thionyl chloride high power C-size spiral cell for nodes power supply.
Minimum pulse capability: 2000mA.
Minimum continuous current: 1000mA.
Minimum capacity: 6.0Ah.

POLE MOUNTING BRACKET FOR NODES OLSACPOLPL8

Plate for pole mounting of nodes. It includes U-bolts and nuts for Ø 50 mm poles.

WALL MOUNTING BRACKETS FOR NODES OLSACCMWALL

Suitable for all nodes model, except for Mininode. Composed by 2 mounting Brackets, aluminium made.

WALL MOUNTING BRACKETS FOR MININODE OLSPLAMWALL

Suitable for Mininode only. Composed by 4 mounting Brackets, plastic made.

VERTICAL MOUNTING PLATE FOR WIRELESS TILTMETER OLSACCINCVPO

L shaped plate for wireless tiltmeter to be installed on vertical walls. Overall dimensions: 120x102x50 mm, thickness 10 mm.

HORIZ. MOUNT. PLATE FOR WIRELESS TILTMETER OLSACCINCHPO

Plate for wireless tiltmeter to be installed on horizontal surface. Dimensions 130x102x5 mm.

POLE MOUNT. BRACKET FOR WIRELESS TILTMETER OLSACCINCPLO

Plate for pole mounting of wireless tiltmeters. It includes U-bolts and nuts for Ø 50 mm poles.

VERT. MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASVPO

Adjustable mounting plate for vertical surface. Anchor bolts not included.

GATEWAY LIGHTENING PROTECTION FOR ETHERNET OLSACCPRETH

Indoor Ethernet surge protection. Transient protection circuit based on high energy gas discharge tubes and a network of fast response silicon avalanche diodes (SAD).

GATEWAY LIGHTENING PROTECTION FOR ANTENNA OLSACCPRANT

RF coaxial surge protection on radio link. P8AX09-6G-N/ MF series from CITEL.

SWIVEL MOUNT. PLATE FOR LASER DIST. GAUGE OLSACCLASSWI

Swivel mounting bracket. For a wall or a convergence bolt with 3/8". Anchor bolts not included.

SOLAR PANEL KIT FOR DIGITAL NODE OAX10W003AH

It is composed by a 10W solar panel with 10m cable and a plastic box housing the 2.3 Ah battery and charge controller. The IP67 box will house also the digital sensor kit (not included).

DIGITAL SENSOR KIT FOR DIGITAL NODE 00MX24V030W

Electronic boards for powering and wire 1 chain of digital instruments. To be used with solar power kit. For the maximum number of digital instrument of the chain please refer to the dedicated table.

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.
We reserve the right to change our products and specifications without prior notice. The datasheet is issued in English and other languages.
In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

	OMNIALOG GT-2400	OMNIALOG GT-100D
Temperature drift	< 10 ppm / °C, range -30°C to +70°C	-
Input noise voltage	5,42 µVpp	-
Input limits	±12V	-
Sustained input voltage w/o damage	±50V DC max	-
DC common mode rejection	>105dB	-
Normal mode rejection	>90dB	-
Input impedance	20 MΩ typical	-
OUTPUT		
Digital output	One relay output (for alarm, etc.): volt-free closure (low voltage 30V, 2A)	
DIGITAL INPUTS		
Measurement rate (MR)	Max frequency 1kHz	
Accuracy	0.1 Hz	
PROTECTIONS	<p>Electro-mechanical relays for each measuring channel:</p> <p>Electrical endurance: min. 2x10⁵ operations, Mechanical endurance: 10x10⁸ operations.</p> <p>Circuit protection: Gas Discharge Tubes (GDT):</p> <p>DC Breakdown Voltage 75V (± 20%@100V/µs) Impulse Breakdown Voltage 250V (@100V/µs) typical</p> <p>Overvoltage and reverse polarity protection on power supply input. Short circuit protection on every outputs of sensor power supply.</p>	
SYSTEM POWER REQUIREMENTS		
Voltage (external power supply)	10 to 30 V DC (reverse polarity protected), max 5 A	
External rechargeable batteries	12V DC nominal	
Typical current drain (@12Vdc, external power supply)	<p>Sleep mode: 100 µA</p> <p>ON: 62 mA - ON with ethernet connected: 87 mA - ON with display ON: 115 mA ON with display ON and ethernet connected: 142 mA</p> <p>Analog initialisation: 115 mA</p> <p>Measurement: 123 mA (with 12 mA @ 24 V sensor consumption)</p>	
ENVIROMENTAL CONDITIONS		
Operating temperature	-30 to +70°C (display -20 to +70°C)	
Storage temperature	-40 to +85°C (display -30 to +80°C)	
Humidity	80%	
Overvoltage category	II	
Pollution degree	2	
Sound levels	< 74dBA	
Maximum height of use	3000m	

OMNIALOG GT-2400

OMNIALOG GT-100D

SOFTWARE & FIRMWARE

Web server on board (independent OS platform).

Live update (firmware and web pages).

FTP client to send data/alarms on a FTP server (SFTP not supported)

MAIL to sent data/alarms to max 5 email address (SMTPS / SSL not supported)

SMS to sent alarms to max 5 telephone numbers

Data download (readings, logs) in .csv file (compatible with Microsoft Excel)

Virtual channels management (max No.80 channels)

Languages: Italian, English and French

PHYSICAL CHARACTERISTICS

Dimensions (L x W x H)

183 x 144 x 118 mm

183 x 144 x 76 mm

Weight

1500 grams

1000 grams

Material

Plastic and metal



Plastic and metal

Wiring



Removable connector

Removable connector

TOP VIEW



FRONT VIEW



OMNIALOG GT-2400

OMNIALOG GT-100D

1	Membrane keyboard	4	USB	7	"V" IN
2	RS-232	5	"V" OUT	8	PWR input
3	LAN	6	RS-485	9	Analogical inputs

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l.

The manufacturer reserves the right to make changes to the product or to its parts without prior notice, also on the basis of contingent situations not related to the technical characteristics alone, such as, for example, material or components shortages.

For the specific accuracy performance of each product, please refer to the Calibration Report issued for each instrument.

The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.